




The AGCO Allis 8775 and 8785 are the ones that produce.

- New AGCO® Allis engine
- 4-speed Powershift transmission
- 2WD or AWD
- Cab or ROPS
- More operator comfort
- 540/1000/economy PTO
- Wet clutches
- New hydraulic flow
- Electronic 3-point lift

Look over the 95 PTO hp AGCO® Allis 8775 and the 110 PTO hp 8785, and you'll see what we mean by great new ideas. For instance, low profile design and a roomy cab offer more operating efficiency and operator comfort than ever. Then there's the clean, quiet power of the new AGCO Allis 600 Series 6 cylinder liquid cooled diesel. Add all the other advantages of the 8775 and 8785, and you've got plenty of reasons to get one.

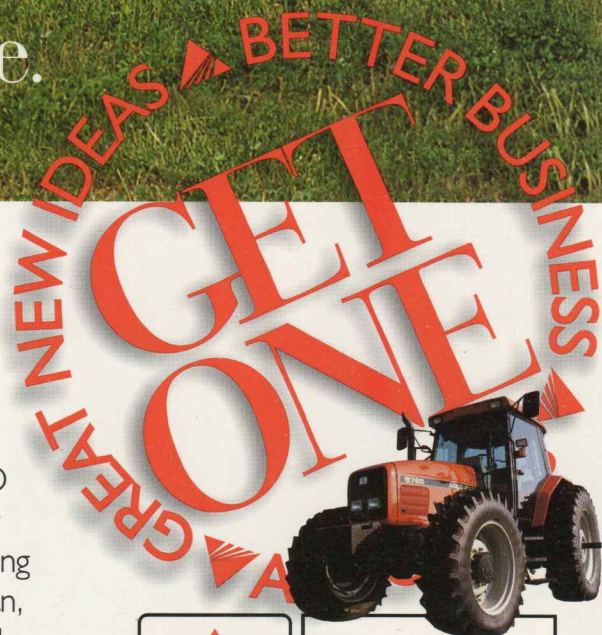


**AGCO
ALLIS**

Get a closer look, and you'll want to get one.

Start at one end of the streamlined new AGCO® Allis 8775 and 8785, and work your way to the other. By the time you're finished, you'll realize just how much innovation and dedication have gone into

creating a tractor that's all new from the ground up and the inside out. And once you drive one, the only thing left to do after that is get one.

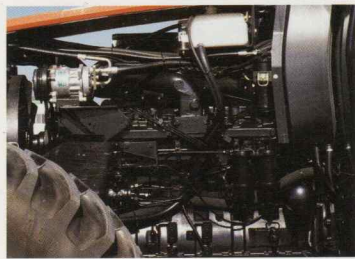

New Style.
Low profile sloping hood for good looks and an even better view.

New Choices.
32 x 32 transmission with 4-speed Powershift with optional creeper.

Wet multi-disc clutch increases durability by cushioning torque loading surface while dissipating heat.

New View.
Cab designed for clear all-around visibility.

New Comfort.
Spacious interior and convenient controls for easier operation.

New Engine.
AGCO Allis 600 Series liquid cooled diesel.

New Control.
Improved hydraulic system for efficient versatility.

New
electronic 3-point hitch.



AGCO Allis Model	8775	8785	AGCO Allis Model	8775	8785	
Engine	AGCO® Allis Model 666	AGCO® Allis Model 666	Independent PTO Economy 540/1000 PTO	540/1000 rpm Standard	540/1000 rpm Standard	
PTO HP (kW)	95 (70.8)	110 (82.0)	Hydraulic System	Closed Center 2900 (200) 27.7 (105)	Closed Center 2900 (200) 27.7 (105)	
Rated Speed	2200 RPM	2200 RPM				
Type	Liquid Cooled Diesel	Liquid Cooled Diesel				
Aspiration	Natural	Turbocharged	Max. Pressure psi (bar)	2900 (200)	2900 (200)	
Displacement (cu in/liter)	402 (6.6)	402 (6.6)	Max. Output gpm (lpm)	27.7 (105)	27.7 (105)	
	Bore (in/mm)	4.25 (108)	3-Point Hitch Category	II	II	
	Stroke (in/mm)	4.72 (120)	3-Point Hitch Control	Electronic	Electronic	
	# Cylinders	6	6	SAE 3-Point Hitch	7000 (3175) Telescope Turnbuckle Telescope	9000 (4082) Telescope Turnbuckle Telescope
	Compression Ratio	16.5:1	16.5:1			
Fuel Tank Capacity, Standard	42 (160)	42 (160)	Lift Capacity @ 24" lbs (kg)	7000 (3175)	9000 (4082)	
ROPS, U.S. gal (L)	42 (160)	59 (225)	3-Point Hitch Stabilizers	Telescope Turnbuckle Telescope	Telescope Turnbuckle Telescope	
Cab Tractor, U.S. gal (L)	42 (160)	59 (225)	Lower Draft Arm Link Ends	Telescope	Telescope	
Clutch Type	Wet Multi Disc, Oil Cooled	Wet Multi Disc, Oil Cooled	Dimensions	78 (1981) 109 (2768) 176 (4470) 112.6 (2860)	88 (2235) 109 (2768) 176 (4470) 112.6 (2860)	
Transmission	4-Speed Powershift	4-Speed Powershift				
Type	Standard	Standard				
Forward-Reverse Shuttle	Standard	Standard				
Brakes	Hydraulic Multi Disc, Oil Immersed	Hydraulic Multi Disc, Oil Immersed	Approximate Shipping Weight	9249 (4190)	9249 (4190)	
			Type	2WD Cab lbs (kg)	10,858 (4920)	10,858 (4920)
			AWD Cab lbs (kg)			