


the ALL NEW Belarus



- NEW advanced front axle
- NEW dash controls
- 3 D/A remotes
- Front weights & guards standard
- Available 70 to 130HP

BELARUS

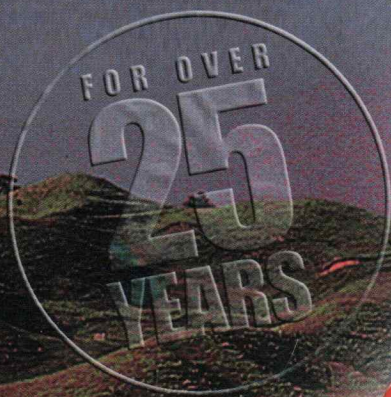

**You know Belarus tractors are affordable.
And you know Belarus Tractors are loaded with value.
Now it's time to look again - at the NEW Belarus models.**

New cab dynamics are complemented by extra field working lights as standard equipment. Belarus is responding to your needs for even more performance and more value.

- synchro transmission 3 mode constantly engaged, automatically engaged, disengaged 4WD
- front axle with limited slip differential
- hydrostatic power steering
- water cooled, big capacity motor
- 3 sets of D/A remotes (2 with joy stick)
- 48L/Min HYD Flow*
- PTO W/ - 540 + 1000 RPM + ground speed
- mechanical independent clutch
- motor MTD air compressor and tank
- straight front axle with larger 24" wheels

**depending on model*

	BELARUS 592	BELARUS 920	BELARUS 952	BELARUS 1025
Engine	Direct injection	Direct injection	Direct injection	Direct injection
Model	D - 242	D - 243	D - 245.5	D - 245
Engine Power HP SAE	70	90	105	115
Rated Speed	1800 rpm	2200 rpm	1800 rpm	2200 rpm
Cylinders	4	4	4	4
Bore/stroke	110 x 125mm	110 x 125mm	110 x 125mm	110 x 125mm
Displacement	4.75L	4.75L	4.75L	4.75L
Aspiration	Natural	Natural	Turbocharged	Turbocharged
Clutch	Dry, single disk	Dry, single disk	Dry, single disk	Dry, twin disk
Transmission	Duel range	Duel range	Duel range	Four range
Synchromesh	Yes	Yes	Yes	Yes
Shuttle-Shift	Std 9F-8R	14F/4R	14F/4R	14F/4R
Rear PTO				
Independent 1 and 2	540/1000	540/1000	540/1000	540/1000
Ground Speed	Yes	Yes	Yes	Yes
Differential Lock	Hydraulically Actuated Control			
Brakes	New Mechanical Dry Disk Type 204mm Diameter			
Hydraulic System	Open Centre			
Flow Capacity	48L/m	48L/m	48L/m	56L/m
Three Point Hitch	Category II with Linkage Stabilizers			
Lift Capacity	3000kg	3700kg	3700kg	4500kg
Remotes	Three Set Double Acting STD			
Steering	Hydrostatic Power Steering			
Capacities				
Fuel Tank	130L	130L	130L	156L
Engine Crankcase	12L	12L	14L	15L
Transmission	40L	40L	40L	40L
Hydraulic System	22L	22L	22L	22L
Cooling System	20L	20L	20L	20L
Electrical System	12 volt with 24 volt starter			
Cab	(OECD Approved) 2 Door Rops cab W/Side Windows			
Dimensions				
Length 'A'	3930mm	3930mm	4100mm	4215mm
Width 'E'	1970mm	1970mm	1970mm	1980mm
Height 'D'	2800mm	2800mm	2800mm	2885mm
Turning Radius	3500mm	3500mm	3500mm	3750mm
Ground Clearance Front	450mm	450mm	450mm	450mm
Ground Clearance Rear	380mm	380mm	380mm	430mm
Operating Weight	3800kg	4010kg	4010kg	4295kg
Tyres				
Front	360/70R24	360/70R24	360/70R24	360/70R24
Rear	18.4 x 34	18.4 x 34	18.4 x 34	18.4 x 38
Optional Equipment	Creeper box; high clearance front axle, 16.9 x 38 and 9.5 x 42 tyres, Air Conditioning			

Traction Wholesale Ltd
0800 235 278
07 578 8964

021 477 597 FX 578 8965
119 BIRCH AVENUE TAURANGA



BELARUS