


ISEKI

REAL POWER FOR FARM OR ORCHARD


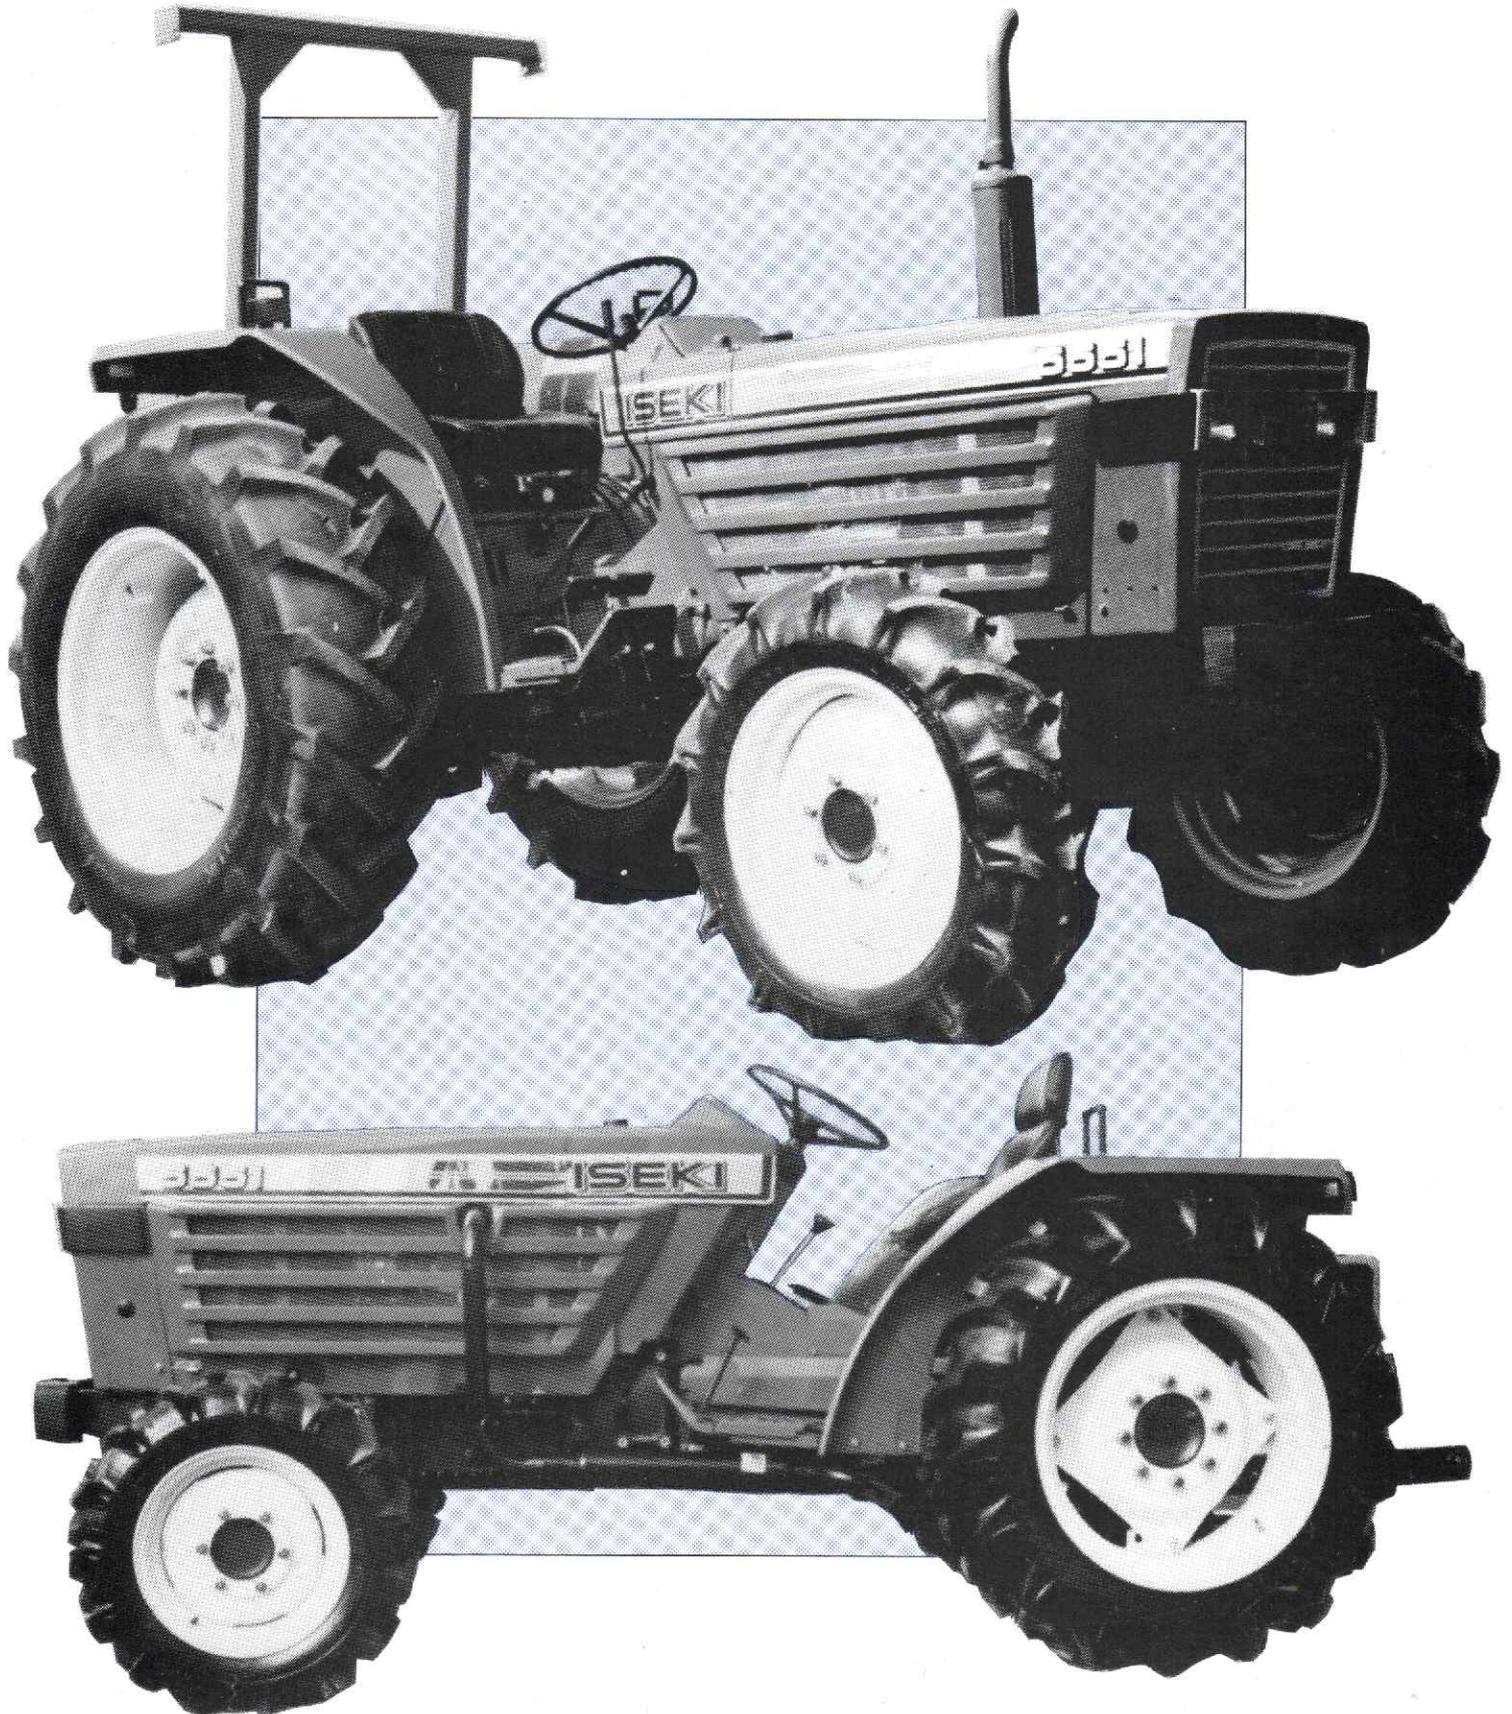


ISEKI TD 5551

Specifications

Tractor models		TD 5551	
Items		2WD	4WD
Dimensions Ag (mm)			
Overall length (from front bumper to 3-p hitch end)		3,465	
Overall height (Top of muff. cap)		2,055	
Wheel base		2,015	
Wheel tread	Front	1,150—1,550	1,220 1,470
	Rear	1,308—1,612	
Minimum ground clearance		345	
Dimensions Orchard			
Overall width (A)		1,360	
Bonnet height (B)		1,250	
Seat height (C)		1,040	
Steering wheel (D)		1,370	
Turning radius	w/brake	2,850	2,940
	m w/o brake	3,440	4,100
Weight	(kg)	1,720	1,870
Engine			
Model		Isuzu C240T	
Type		Water cooled, 4-cycle diesel	
Number of cylinders		4	
Output (DIN HP/rpm)		55/2,600	
Displacement (cc)		2,369	
Bore x Stroke (mm)		86 x 102	
Combustion chamber type		Swirl chamber	
Lubrication system		Forced-circulation	
Cooling system		Water cooled forced circulation	
Air-cleaner		Dry, double element	
Fuel		Diesel	
Fuel tank capacity (l)		50	
Starting method		Electric starter with glow plug	
Battery		12V—80Ah	
Chassis			
Clutch	Main clutch	dry single disc	
	PTO clutch (Independent)	Wet, multi-disc, hydraulic with PTO Pressure control valve	
Transmission		Synchromesh	
Brakes		Wet, multi-disc (also serving as parking brakes)	
Steering system		Integral type power assisted	
Number of speed		12-forward, 4-reverse	
With creep shift (L-type)		24-forward, 8-reverse	
Tire size	Front	750-16, 6 PR	8.3-20, 6 PR
	Rear	14.9/13-28, 6 PR	
Implement lift			
Lifting capacity (kg)		1,600	
Pump capacity (l/min.)		31.9	
Mounting method		Hydraulic 3-point linkage	
Towing method		Swing drawbar	
3-point hitch category		Category I & II	
Function		Position and draft	
PTO shaft		6-spline	
Speed (PTO rpm/ 1st		540/2,330	
Engine rpm) 2nd		1000/2,288	

* Specifications are subject to change without notice.

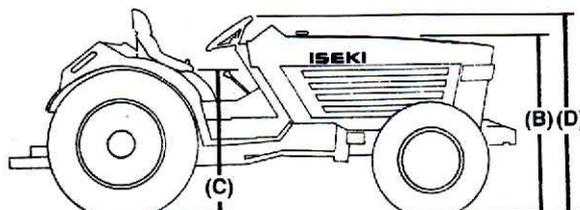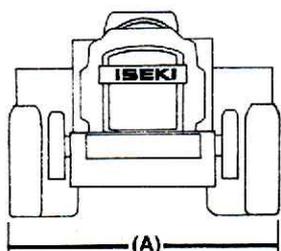

STANDARD EQUIPMENT

ENGINE

Muffler with the tail pipe, Fuel tank (50 litres), Double element air cleaner.

CHASSIS

Two headlights, Rear turn signal lights, Two tail lamps & two stop lights, Number plate lamp, Back lamp, Work lamp. Main clutch cut-off lever, Differential lock device, Sliding adjustable suspension seat, Engine shut off lever, Hydraulic control lever with position & draft, Handle tilt adjusting lever, Steering wheel, Two rear mirrors, Hydraulic slow return knob, Lift rod adjusting handle, Floor covers, Battery, Safety starting switch, Rear fenders, Foot rest, Two-speed rear PTO shaft & its guard, 3 point linkage (Cat. I), Swinging draw bar, Tools.

OPERATION CONTROL

Main speed shift lever, Range shift lever, High-low shift lever, Creep shift lever (L-type only), PTO speed shift lever, Hand throttle & accelerate pedal, Brake pedals, Clutch pedal, Parking brake lever, 4WD shift lever (F-type only)

INSTRUMENT PANEL

Thermometer, Fuel meter, Engine speed/tachometer, Hourmeter, Glow signal light, Monitor lights (oil pressure, battery charge), Turn signal pilot lights, Meter lamp, Main key switch, Light switch, Horn button, PTO lever switch, Warning hazard light switch.

OPTIONAL EQUIPMENT

Trailer hitch, Linkage draw bar, Hydraulic take out unit, Balance weight, Front wheel weight, Rear wheel weight, Horizontal muffler, Top link (Cat. II)