


ISEKI

2 New Releases
in the Compact Tractor range

TE 3210
TE 4270

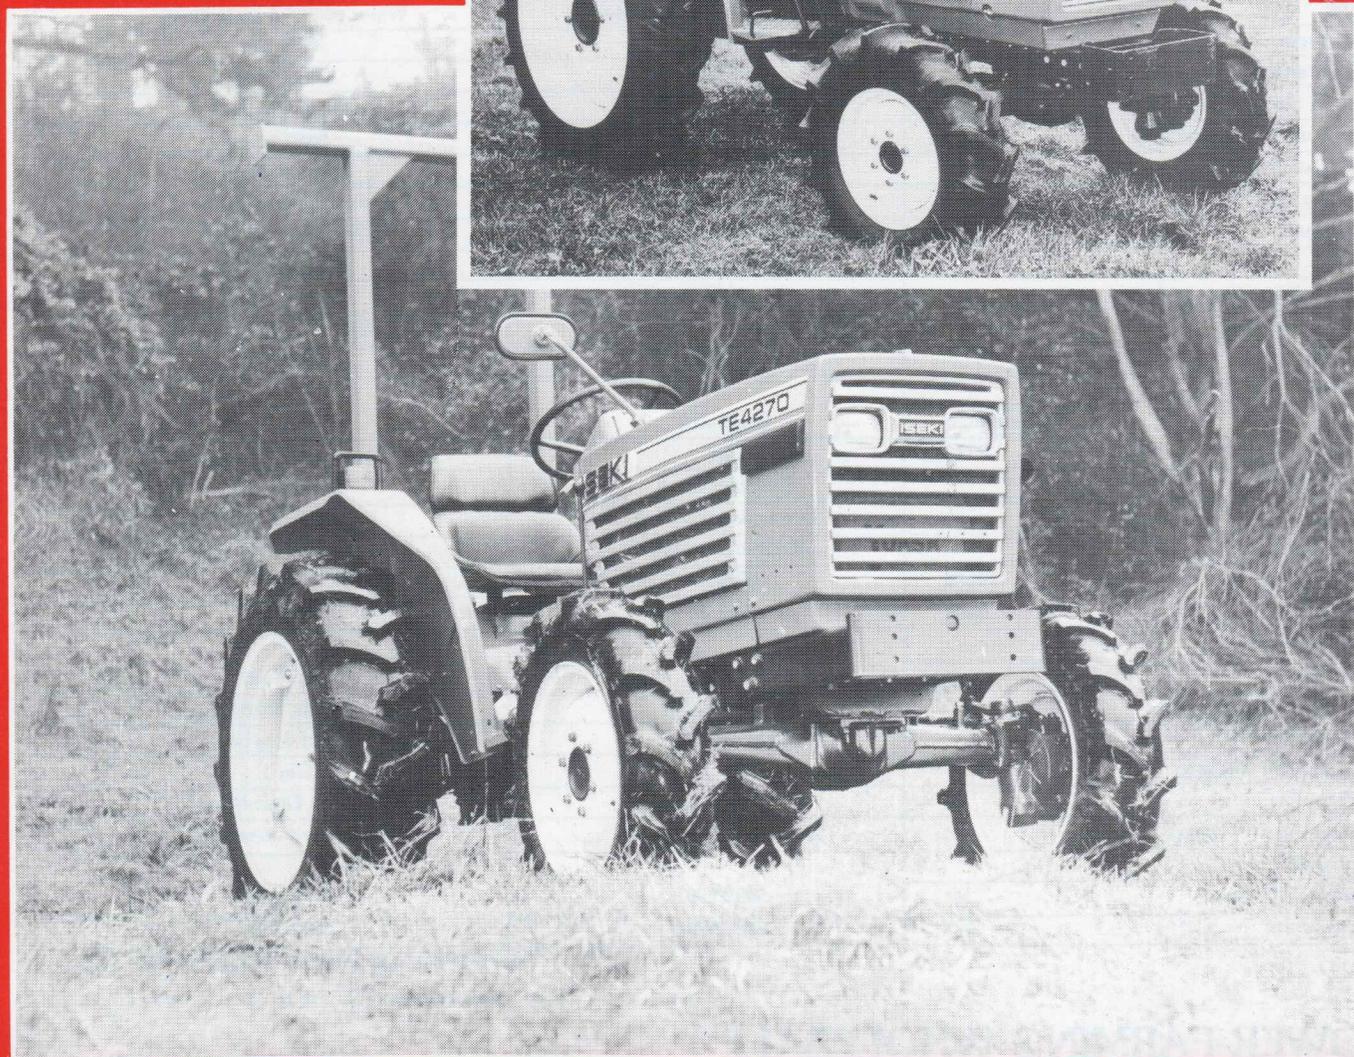

The new choice
in tractors.



ISEKI

The new choice in tractors.

Specifications

Tractor models		TE 3210F	TE 4270F
Items			
Dimensions cm (in.)			
Overall length (from front Bumper to 3-P hitch end)		264 (104)	295 (116)
Overall width (Outer face to outer face of both rear wheels)		100 (39)	112 (44)
Overall height (Height to top of bonnet)		103 (40)	116 (41)
Wheel base		150 (59)	170 (70)
Wheel tread	Front	95 (37) Fixed	105 (41)
	Rear	880 (350) to 1040 (40)	1020 (40) to 1340 (53)
Minimum ground clearance (at drawbar bracket)		35 (14)	34 (12)
Minimum turning radius cm (in.)	With brake applied	190 (75)	220 (87)
	Without brake applied	240 (94)	250 (98)
Weight kg (lb)		760kg (1675lb)	1115kg (2458lb)
Engine		Isuzu	Isuzu
Model		3AF1	3AE1
Type		Water cooled 4 cycle diesel	Water cooled 4 cycle diesel
Rated rpm		2500 rpm	2550 rpm
Displacement c.c. (cu.in)		1170 (714)	1296 (790.9)
Bore X Stroke mm (in)		76x86 (2.9x3.3)	80x86 (3.1x3.3)
Combustion chamber type		Swirl type	Swirl type
Lubrication system		Pressure feed	Pressure feed
Cooling system		Forced circulation	Forced circulation
Air cleaner		Dry paper element (single)	Dry paper element
Fuel		Diesel light oil	Diesel light oil
Fuel tank liter (Imp.gal.)		23 litres (5.5 gal)	28 litres (6.1)
Starting method		Electric starter with glow plug	Electric start with glow plug
Battery		12v single	12v single
Chassis			
Clutch	Main clutch	Single dry	Single dry
	PTO	NA	Hyd independent-Elec operation
Transmission		Constant mesh	Synchromesh
Brakes		Dry expanding shoe	Wet type disc brake
Steering sytem		Recirculating Ball	Integral type power steering
Tyre size	Front	600x12	700x16
	Rear	800 x 24	11.2x24
Implement lift			
Operation		Hydraulic	Hydraulic
Mounting method		3 point linkage	3 point linkage
Drawing method		Fixed drawbar	Fixed drawbar
3-point hitch category		Cat 1	Cat 1
Self control		Position control	Position-Draft-Mixed
Number of Trv. Speeds		12 forward - 4 reverse	18 forward - 6 reverse
PTO shaft			
Speed (PTO rpm/ Engine rpm)	1st	540/2200	540/2150
	2nd	1000/2400	1000/2350

*Specifications are subject to change without notice

POWER FARMING WHOLESALE
Master New Zealand Distributors
P.O.Box 6, Morrinsville.

