

ISEKI


The new choice
in tractors.



TS 3510 F





4 wheel drive
26.8 kw (36 h.p.)

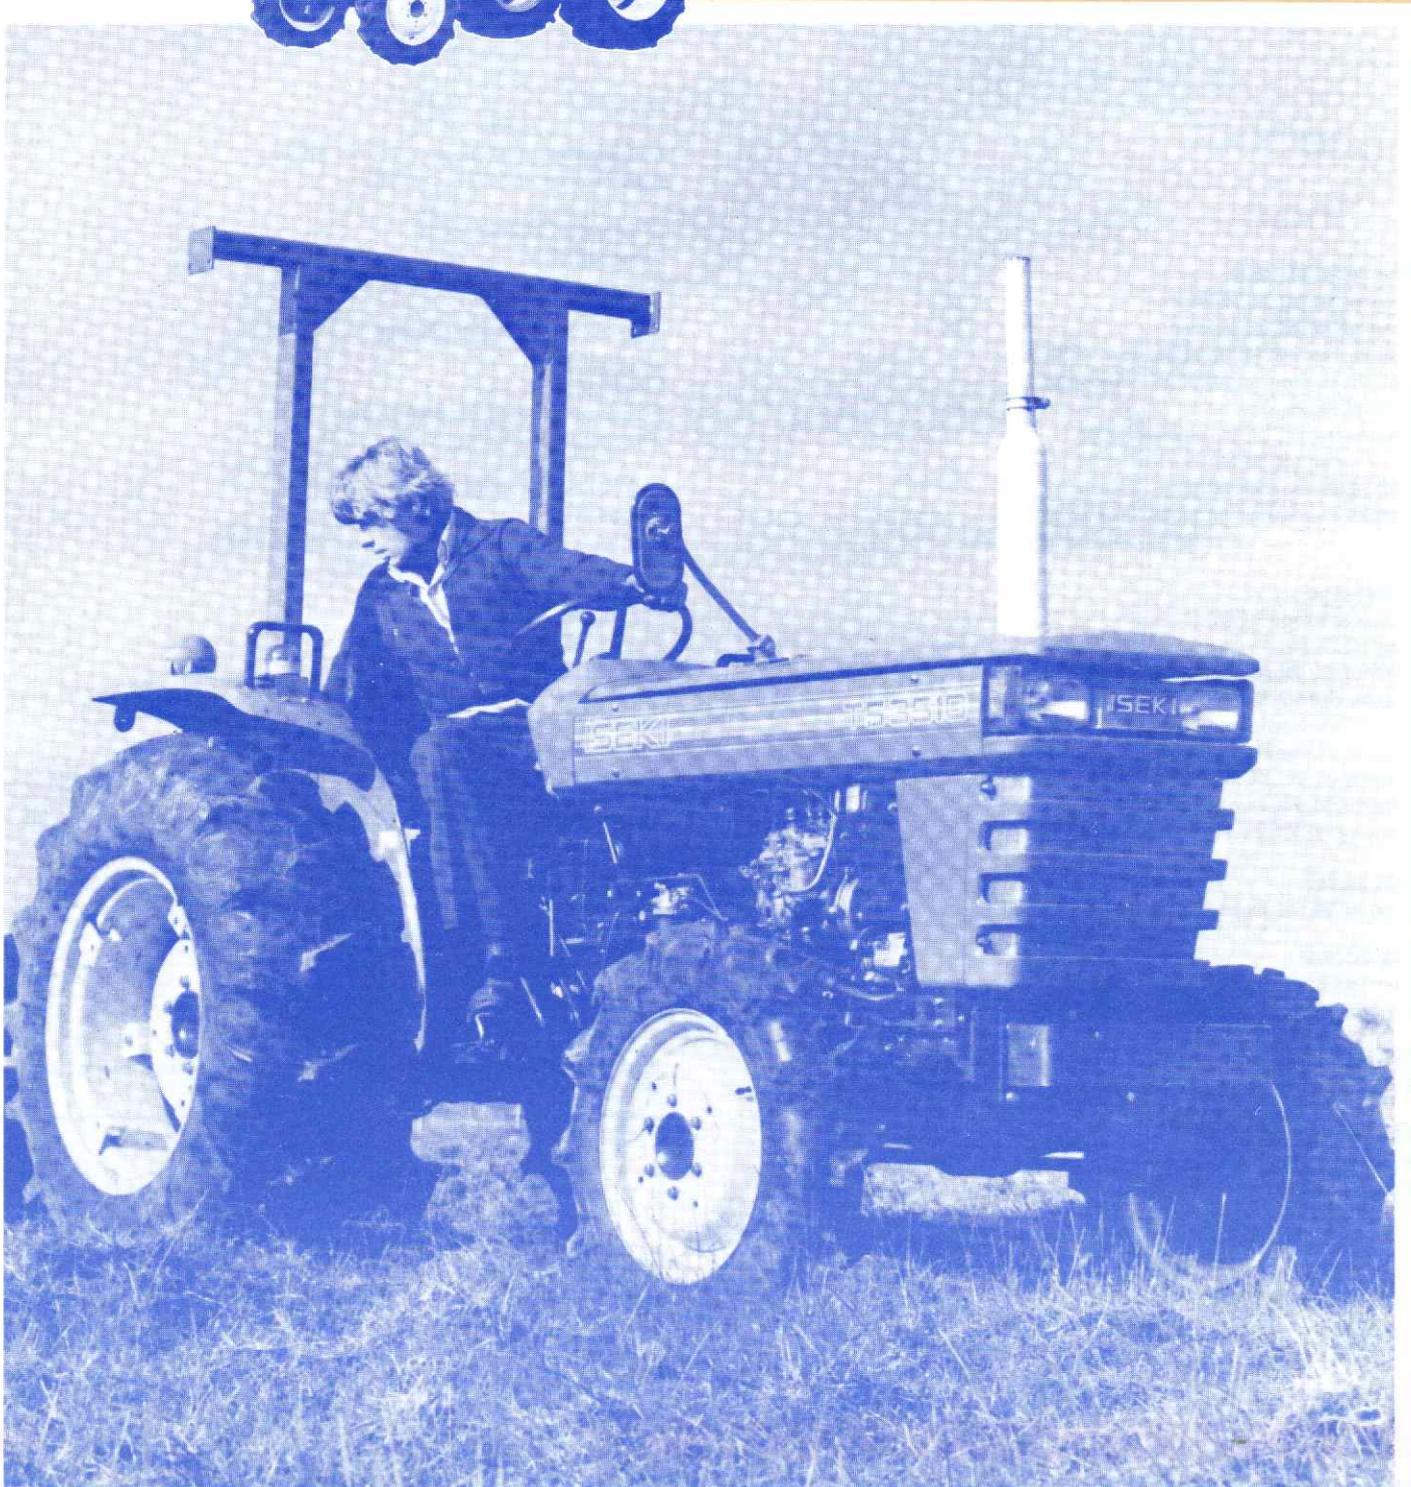

Specifications:

TS 3510 F

4 wheel drive
26.8kw (36 h.p.)

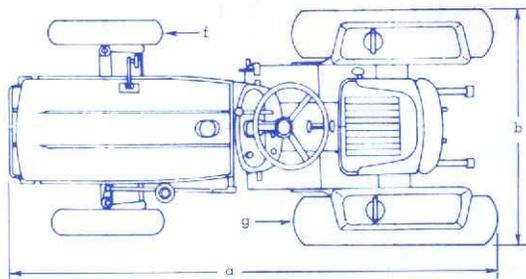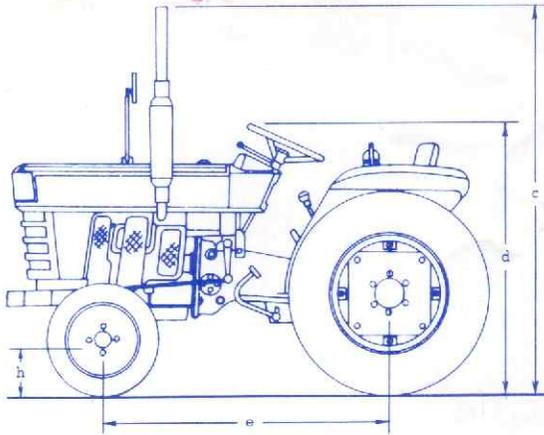

Dimensions

Overall length:	3100mm	a
Overall width:	1494mm	b
Overall height to muffler top:	1995mm	c
Height to steering wheel:	1460mm	d
Wheelbase:	1750mm	e
Tread: front	1120mm to 1420mm	f
rear	1230mm to 1520mm	g
Min. ground clearance:	320mm	h
Turning radius: with braking	2300mm	
without braking	2900mm	

Engine

Make & Model: Isuzu 3AD1
Type: Diesel
Cylinders-bore x Stroke: 3 Cyl. 86mm x 86mm
Piston displacement: 1498cc
Max. flywheel hp: 26.8kw (36hp)
Fuel system: Bosch inline
Start motor: 12V Electric
Alternator: 10 amp
Battery: 12V, 96 AH

Weight

Operating weight W/O operator: 1354kg

Brakes

Service brake: Internal expanding shoe
Parking brake: Mechanical

Steering

Type: Hydrostatic power steering

Axles & Wheels

Four wheel drive: Iseki bevel gear
Tyres (standard): front 600 x 16
rear 12.4 x 24

Power Train

Clutch, type & size: Dual clutch, dry 225mm

Transmission: Constant mesh

Speeds forward: 8

reverse: 2

		Std.	
		Km	mph
Forward	1	1.41	(0.87)
	2	1.95	(1.21)
	3	3.01	(1.87)
	4	4.27	(2.65)
	5	7.17	(4.45)
	6	9.91	(6.14)
	7	15.29	(9.48)
	8	21.69	(13.45)
Reverse		1.95	(1.21)
		9.91	(6.14)

Differential: Bevel gears with difflock

Final drive: Bevel & pinion

Power Take Off

Type: ISEKI

Speeds: 2 speed, PTO 540/1000 rpm

Hydraulic System

Type: ISEKI

Capacity: 8L

Pump rated output: 29.5L/min

Set pressure: 150kg/cm²

3 Point Linkage

Type: ISEKI

Control: Category 1. Hydraulic variable

Max. lift lower link end: 1000kg

Capacity

Fuel tank: 30L

Engine: 6.2L

Cooling: 7.9L

Transmission: 16L

Final drives: 16L

Power steering: 8L

Options

Swinging Draw Bar

Front End Weights

Rear Wheel Weights

Remote Hydraulic Valve Kit

R.O.P.S.

Illustrations, dimensions, weights and data given without obligation and subject to change without notice.

Your Dealer:

ISEKI