


ISEKI

ORCHARD TRACTORS

45 HORSE POWER

ISEKI 'T.S.' 4510

4 WHEEL DRIVE.

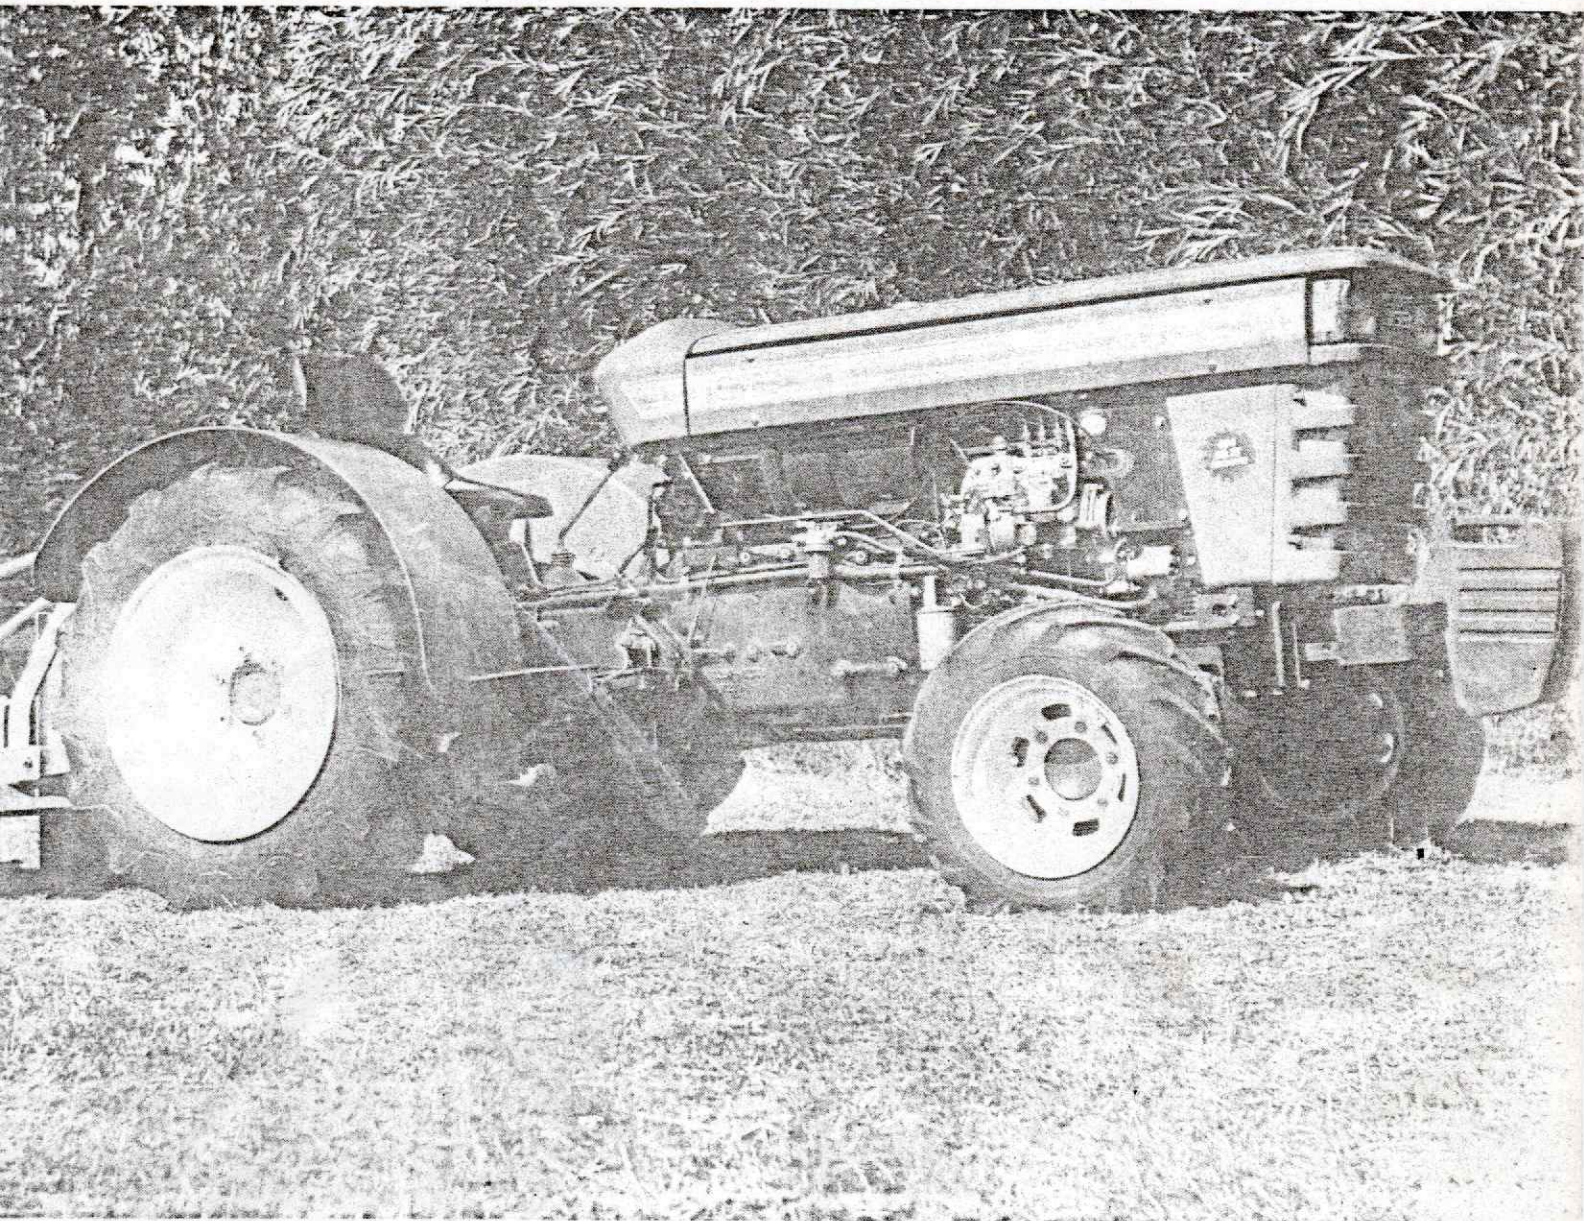

TS 4510 4WD Mk II

3 cylinder Isuzu 4 cycle water cooled engine.
45 Eng HP — 40 P.T.O. HP
8 forward — 2 reverse constant mesh transmission (1.15km to 17.62km)
Diff lock — foot operated rear axle
Front wheel drive — Iseki bevel gear system
Two stage clutch (225mm)
540 - 1000 rpm live P.T.O.
Integral power steering
Live hydraulics 20.5 litres per min. — 1000kg maximum lift.
30.3 litre fuel tank
Full instrumentation — hand & foot throttle

Dimensions:

Wheel Base	1790mm
Overall Width	1560mm
Bonnet Height	1117mm
Seat Height loaded	890mm
Steering Wheel	1340mm
Guard Height	980mm
Drawbar Height	250mm
Ground Clearance	240mm
Minimum Turn Radius	2090mm
Basic Weight	1350kg
Tyre Equipment	Front 23 x 8.50 — 12 Rear 12.5L x 20

ISEKI

POWER FARMING
(WHOLESALE) LTD
N.Z. MASTER DISTRIBUTORS
P.O. BOX 6, MORRINSVILLE.

GEAR	KMH	MPH
LOW 1st	1.15	0.71
LOW 2nd	1.59	0.98
LOW 3rd	2.45	1.52
LOW 4th	3.48	2.16
REVERSE	1.59	0.98
HIGH 1st	5.83	3.62
HIGH 2nd	8.05	5.00
HIGH 3rd	12.44	7.73
HIGH 4th	17.62	10.94
REVERSE	8.05	5.00

**CHECK
THE PRICE**

\$

Hyd 2100 PSI

MORRINSVILLE PRINTER