

ISEKI
The new choice
in tractors.





TS 4510 S



2 wheel drive
33.5 kw (45 h.p.)



Specifications:

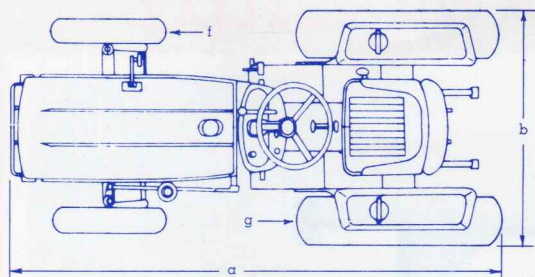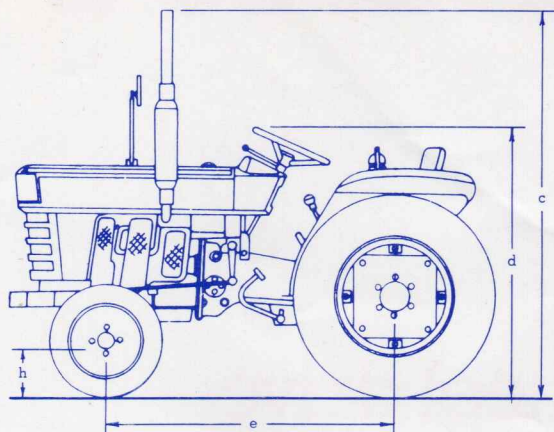

Dimensions

Overall length W/O hitch: 3100mm	a
Overall width: 1533mm	b
Overall height to muffler top: 2030mm	c
Height to steering wheel: 1470mm	d
Wheelbase: 1780mm	e
Tread: front 1170mm-1370mm	f
rear 1290mm-1540mm	g
Min. ground clearance: 400mm	h
Turning radius: with braking 2400mm	
without braking 3000mm	

Engine

Make & Model: Isuzu E 3AB1
 Type: Diesel
 Cylinders - bore x stroke: 3 - 86mm x 102mm
 Piston displacement: 1777cc
 Max. flywheel power: 33.5kw (45hp)
 Fuel system: Bosch inline
 Start motor: 12V Electric
 Alternator: 20 amp
 Battery: 12V, 96 AH

Weight

Operating weight W/O operator: 1270kg

Brakes

Service brake: Internal expanding shoe
 Parking brake: Mechanical

Steering

Type: Hydrostatic power steering

Axles & Wheels

Rear: Central axle
 Front: Heavy duty centre pin telescopic
 Tyres (standard): front 600 x 16
 rear: 14.9 x 24

TS 4510 S

2 wheel drive
 33.5kw (45h.p.)

Power Train

Clutch, type & size: Dual clutch dry 225mm

Transmission: Constant mesh

Speeds: forward 8
 reverse 2

	km/hr
1st	1.40
2nd	1.93
3rd	2.98
4th	4.23
5th	7.10
6th	9.81
7th	15.15
8th	21.49
1st	1.93
2nd	9.81

Differential: Bevel gears with difflock

Final drive: Bevel & pinion

Power Take Off

Type: 2 speeds

Speeds: 540/1000 rpm

Hydraulic System

Type: ISEKI

Capacity: 8L

Pump rated output: 30.5L/min

Set pressure: 150kg/cm²

3 Point Linkage

Type: ISEKI

Control: Hydraulic variable position Category 1

Max. lift at lower link end: 1000kg

Capacity

Fuel tank: 30L

Engine: 6.2L

Cooling: 7.9L

Transmission: 16L

Final drives: 16L

Power steering: 8L

Options

Swinging Drawbar

Front End Weights

Rear Wheel Weights

R.O.P.S.

Remote Hydraulic Valve Kit

Illustrations, dimensions, weights and data given without obligation and subject to change without notice.

Your Dealer:

ISEKI