


ISEKI

HST
Tractor

TX 2160

NEW

4-wheel drive and 2-wheel drive

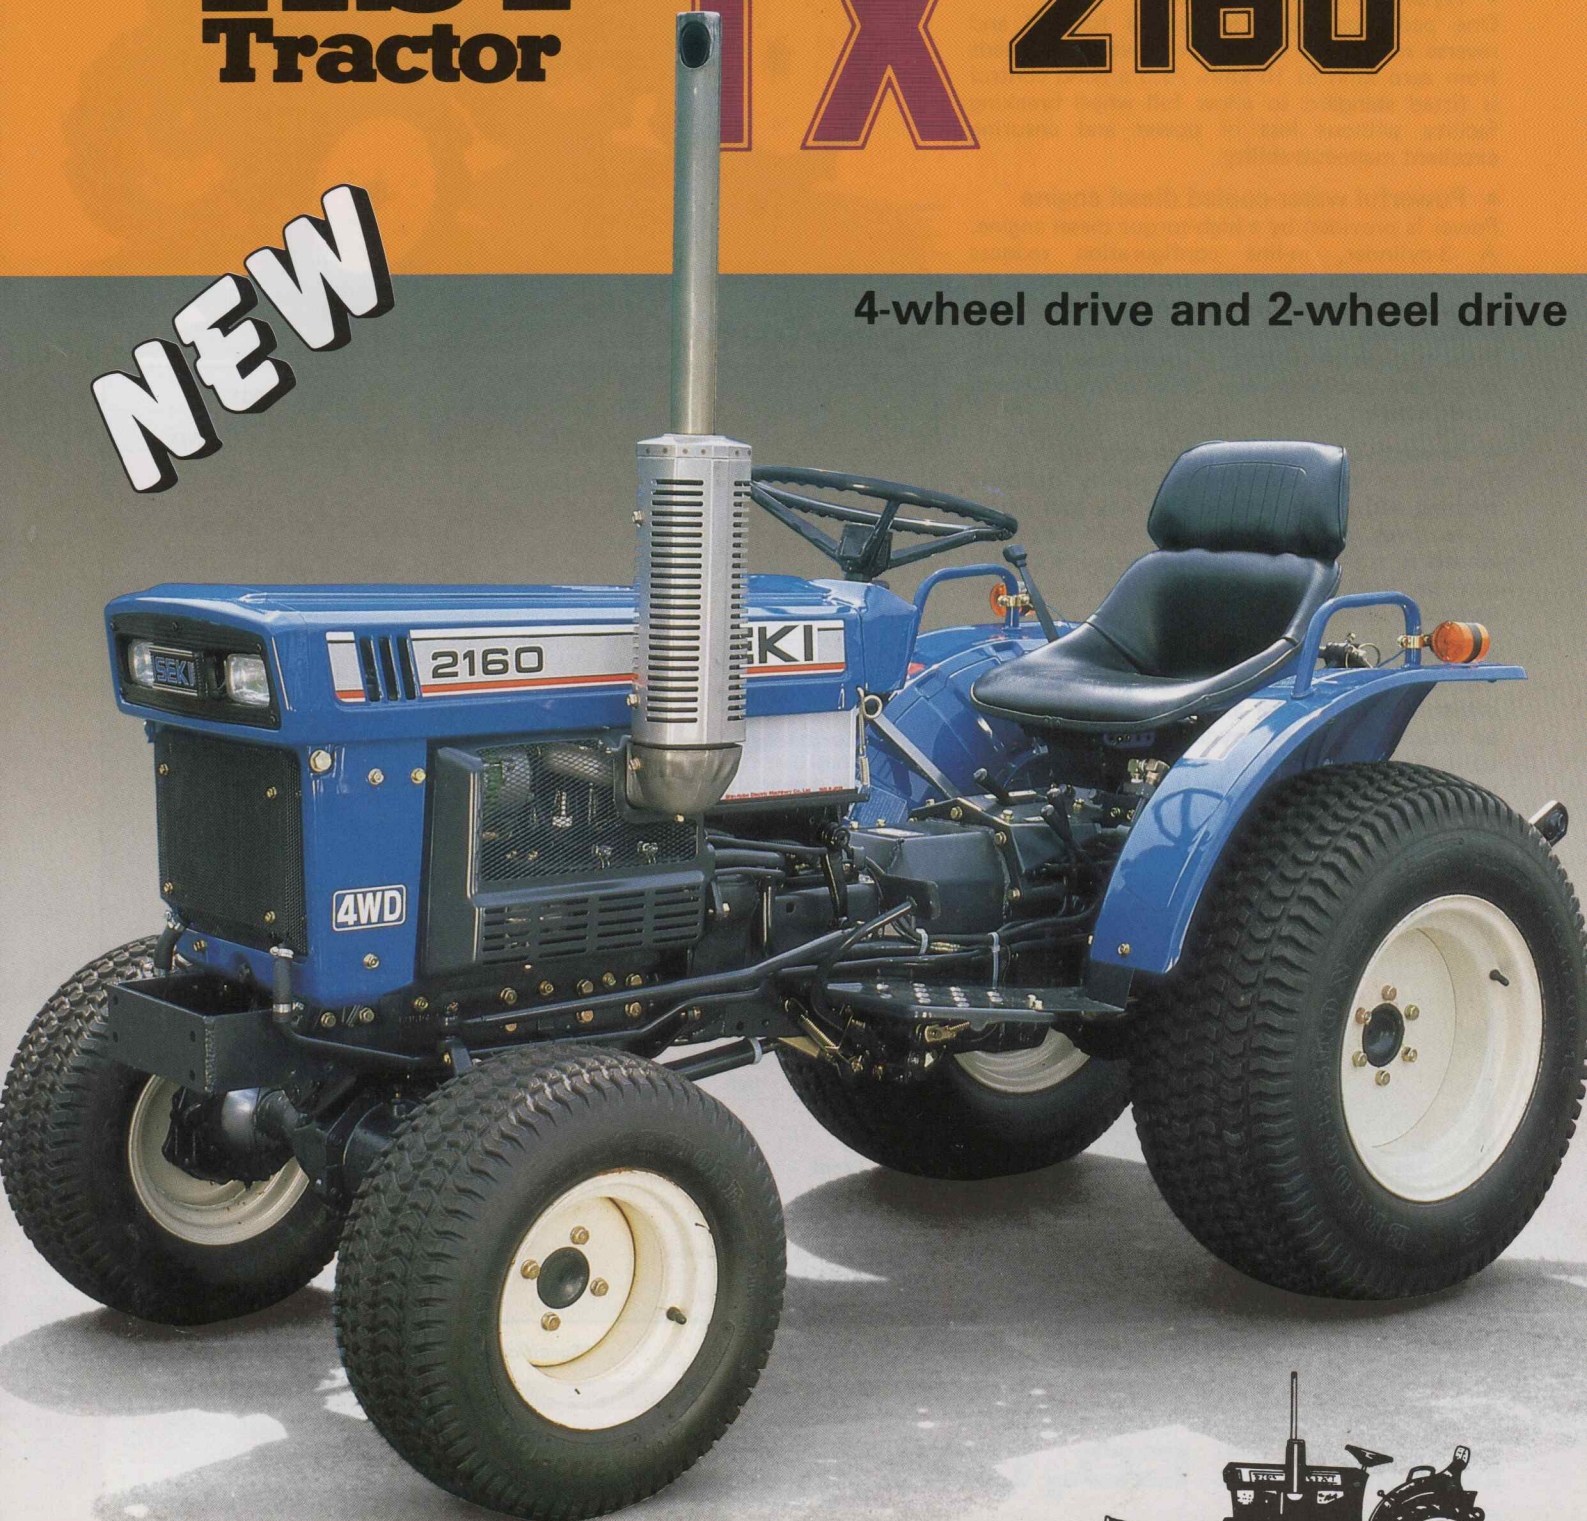

Best tractor in the field.



NEW

HST Tractor



Features

- **Hydrostatic transmission**

One pedal operation to control forward and reverse motion of tractor giving variable speeds from zero kmh to 15 kmh. Also a hand control is fitted standard to allow full wheel breaking facility without loss of power and ensuring excellent manoeuvrability.

- **Powerful water-cooled diesel engine**

Power is provided by a high-torque diesel engine. A 3-cylinder, in-line configuration reduces vibration and noise which means less operator fatigue during extended operation. Reduced fuel consumption is made possible by a swirl combustion chamber system. Trouble-free performance is ensured by durable, high-quality parts and construction.

- **Smooth and comfortable driving**

The tractor has a low centre of gravity for stable running and a comfortable ride. The four wheel drive gives excellent traction and the front wheels turn sharply for tight corners. The tractor can be used throughout the year equipping various kinds of equipment.

- **Easy mounting of attachments**

Various farming equipment as well as garden equipment like mower and other accessories can be attached. The rear hydraulic unit allows the up and down speed to be adjusted and also features a position control. This keeps the attachment in the desired position for smooth operations.



Specifications

Model	TX2160-HST	
	4WD	2WD
Engine	Water-cooled 4-cycle diesel	
Type	3-cylinders	
No. of cylinders	849	
Total displacement	cc	
Output	ps/rpm	
Starting system	DIN 15.5/2600 (SAE18/2600)	
	Self-Starter	
Tractor		
Overall length	mm	
Overall width	mm	
Overall height	mm	
Wheel base	mm	
Min ground clearance	mm	
Weight	kgs	
Tire size Front	5.00-12	
Tire size Rear	8-18	
Wheel tread Front	765	
Wheel tread Rear	700	
Differential lock	800,910	
Fuel tank capacity	ℓ	
	Equipped 12	
Travelling speed	km/hr	
Forward -Low	0 ~ 6.35	
Forward -High	0 ~ 14.82	
Reverse -Low	0 ~ 3.97	
Reverse -High	0 ~ 9.26	
P.T.O	r.p.m.	
Front	2,600	
Rear 1/2 (Live PTO)	540/1000	
Implement lifting device		
Type	Hydraulic with position control	
Mounting method	3P	

*Specifications are subject to change without notice.

FARM MACHINERY & EQUIPMENT
ISEKI & CO., LTD.

Foreign Affairs Division
 3-6, Kioi-cho, Chiyoda-ku, Tokyo, 102 Japan
 Cable Address: ISEKIRICE TOKYO
 Telex: 232-2752, 232-2753 Phone: (03) 238-5245~5260

Dealer: