


# SAME DELFINO 35

**THE ALL-IMPLEMENT TRACTOR**

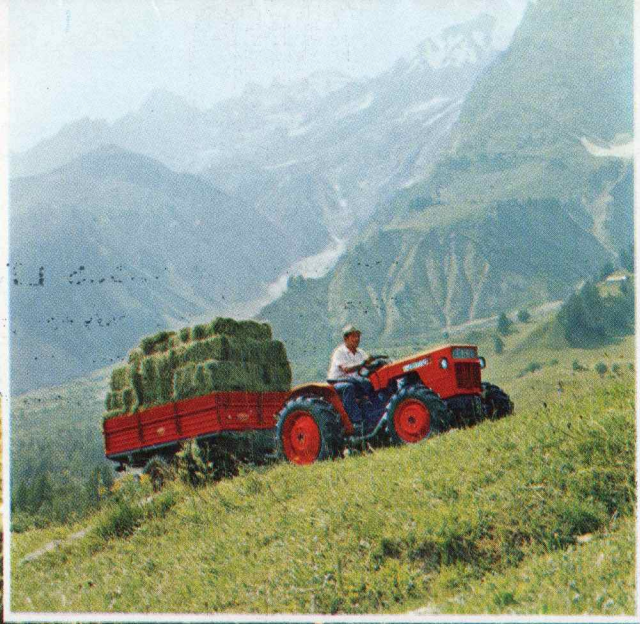

**These are the strong-points  
of the new  
"SAME" DELFINO 35**

- new engine
- new, powerful automatic linkage control unit

- new bodywork line
- front-wheel drive original "Same" system

4-wheel drive model  
original "SAME" system



2-wheel drive model



## TECHNICAL DATA

### Engine

|                      |                                    |
|----------------------|------------------------------------|
| Model                | SAME 034-982                       |
| Fuel type            | Diesel                             |
| Cycle                | 4 stroke                           |
| Injection            | Direct                             |
| Number of cylinders  | 2                                  |
| Cylinder arrangement | in line                            |
| Bore                 | 98 mm (3.85826 ins)                |
| Stroke               | 120 mm (4.72440 ins)               |
| Displacement         | 1810 cm <sup>3</sup> (110 cu. ins) |
| Compression ratio    | 17 : 1                             |
| Max. power           | 34 HP                              |
| R.p.m. at max. power | 2200                               |
| Cooling              | Air                                |
| Lubrication          | Forced                             |
| Valves               | Overhead                           |

### Dimensions

|                    |                     |
|--------------------|---------------------|
| Overall length (1) | 106.1 (269)         |
| Overall width      | 58.7 (149)          |
| Overall height     | 55.9 (142)          |
| Height to hoodline | 49.6 (126)          |
| Ground clearance   | 13.8 (35)           |
| Wheel base         | 66.5 (169)          |
| Front wheel track: |                     |
| Minimum            | 48.0 (122)          |
| Maximum            | 75.6 (192)          |
| Rear wheel track:  |                     |
| Minimum            | 47.2 (120)          |
| Maximum            | 74.8 (190)          |
| Front tyres        | 5.50-16             |
| Rear tyres         | 11.2/10-28*         |
| Weight             | 2910 lbs (1320 Kgs) |

### Standard

| 2-W.D.              | 4-W.D.              |
|---------------------|---------------------|
| ins                 | cm.                 |
| 106.1 (269)         | 107.3 (272)         |
| 58.7 (149)          | 58.7 (149)          |
| 55.9 (142)          | 55.9 (142)          |
| 49.6 (126)          | 49.6 (126)          |
| 13.8 (35)           | 9.1 (23)            |
| 66.5 (169)          | 66.9 (170)          |
| 48.0 (122)          | 47.2 (120)          |
| 75.6 (192)          | —                   |
| 47.2 (120)          | 47.2 (120)          |
| 74.8 (190)          | —                   |
| 5.50-16             | 7.50-18             |
| 11.2/10-28*         | 11.2/10-28*         |
| 2910 lbs (1320 Kgs) | 3240 lbs (1470 Kgs) |

### Orchard

| 2-W.D.              | 4-W.D.              |
|---------------------|---------------------|
| ins                 | cm.                 |
| 104.3 (265)         | 104.3 (265)         |
| 46.9 (119)          | 46.9 (119)          |
| 53.9 (137)          | 53.9 (137)          |
| 47.6 (121)          | 47.6 (121)          |
| 13.0 (33)           | 7.9 (20)            |
| 66.9 (170)          | 66.9 (170)          |
| 38.2 (97)           | 38.2 (97)           |
| 57.9 (147)          | —                   |
| 36.2 (92)           | 36.2 (92)           |
| 55.9 (142)          | 55.9 (142)          |
| 5.50-16             | 6.50-16             |
| 11.2/10-24          | 11.2/10-24          |
| 2820 lbs (1280 Kgs) | 3150 lbs (1430 Kgs) |

(1) Without attachments.  
\* On request tyres 11.2/10-24.

### Speeds in m.p.h.


|          | 11.2/10-24    |                                | 11.2/10-28**  |                                |
|----------|---------------|--------------------------------|---------------|--------------------------------|
|          | (Km.p.h.)     | at 2200 r.p.m. with rear tyres | (Km.p.h.)     | at 2200 r.p.m. with rear tyres |
| 1st      | 1.43 (2.31)   | 1.38 (2.22)                    | 1.38 (2.22)   | 1.38 (2.22)                    |
| 2nd      | 2.31 (3.73)   | 2.22 (3.58)                    | 2.22 (3.58)   | 2.22 (3.58)                    |
| 3rd      | 3.90 (6.27)   | 3.75 (6.03)                    | 3.75 (6.03)   | 3.75 (6.03)                    |
| 4th      | 5.71 (9.20)   | 5.49 (8.84)                    | 5.49 (8.84)   | 5.49 (8.84)                    |
| 5th      | 9.22 (14.84)  | 8.86 (14.26)                   | 8.86 (14.26)  | 8.86 (14.26)                   |
| 6th      | 15.53 (24.99) | 14.92 (24.02)                  | 14.92 (24.02) | 14.92 (24.02)                  |
| 1st rev. | 2.13 (3.42)   | 2.04 (3.29)                    | 2.04 (3.29)   | 2.04 (3.29)                    |
| 2nd rev. | 8.47 (13.63)  | 8.14 (13.10)                   | 8.14 (13.10)  | 8.14 (13.10)                   |

\*\* The lower speeds of the types with 11.2/10-28 tyres compared with the speeds of the types having 11.2/10-24 tyres are due to a different gear ratio of the final reducers.

- "SAME" Diesel engine
- "SAME" automatic control hydraulics
- "SAME" air-cooling
- 2 and 4-wheel drive original "SAME" system



TIMM ENTERPRISES LTD.  
 5204 TRAFALGAR RD. P.O. BOX 157  
 OAKVILLE, ONTARIO, CANADA  
 PHONES (416) 826-1333 878-4244

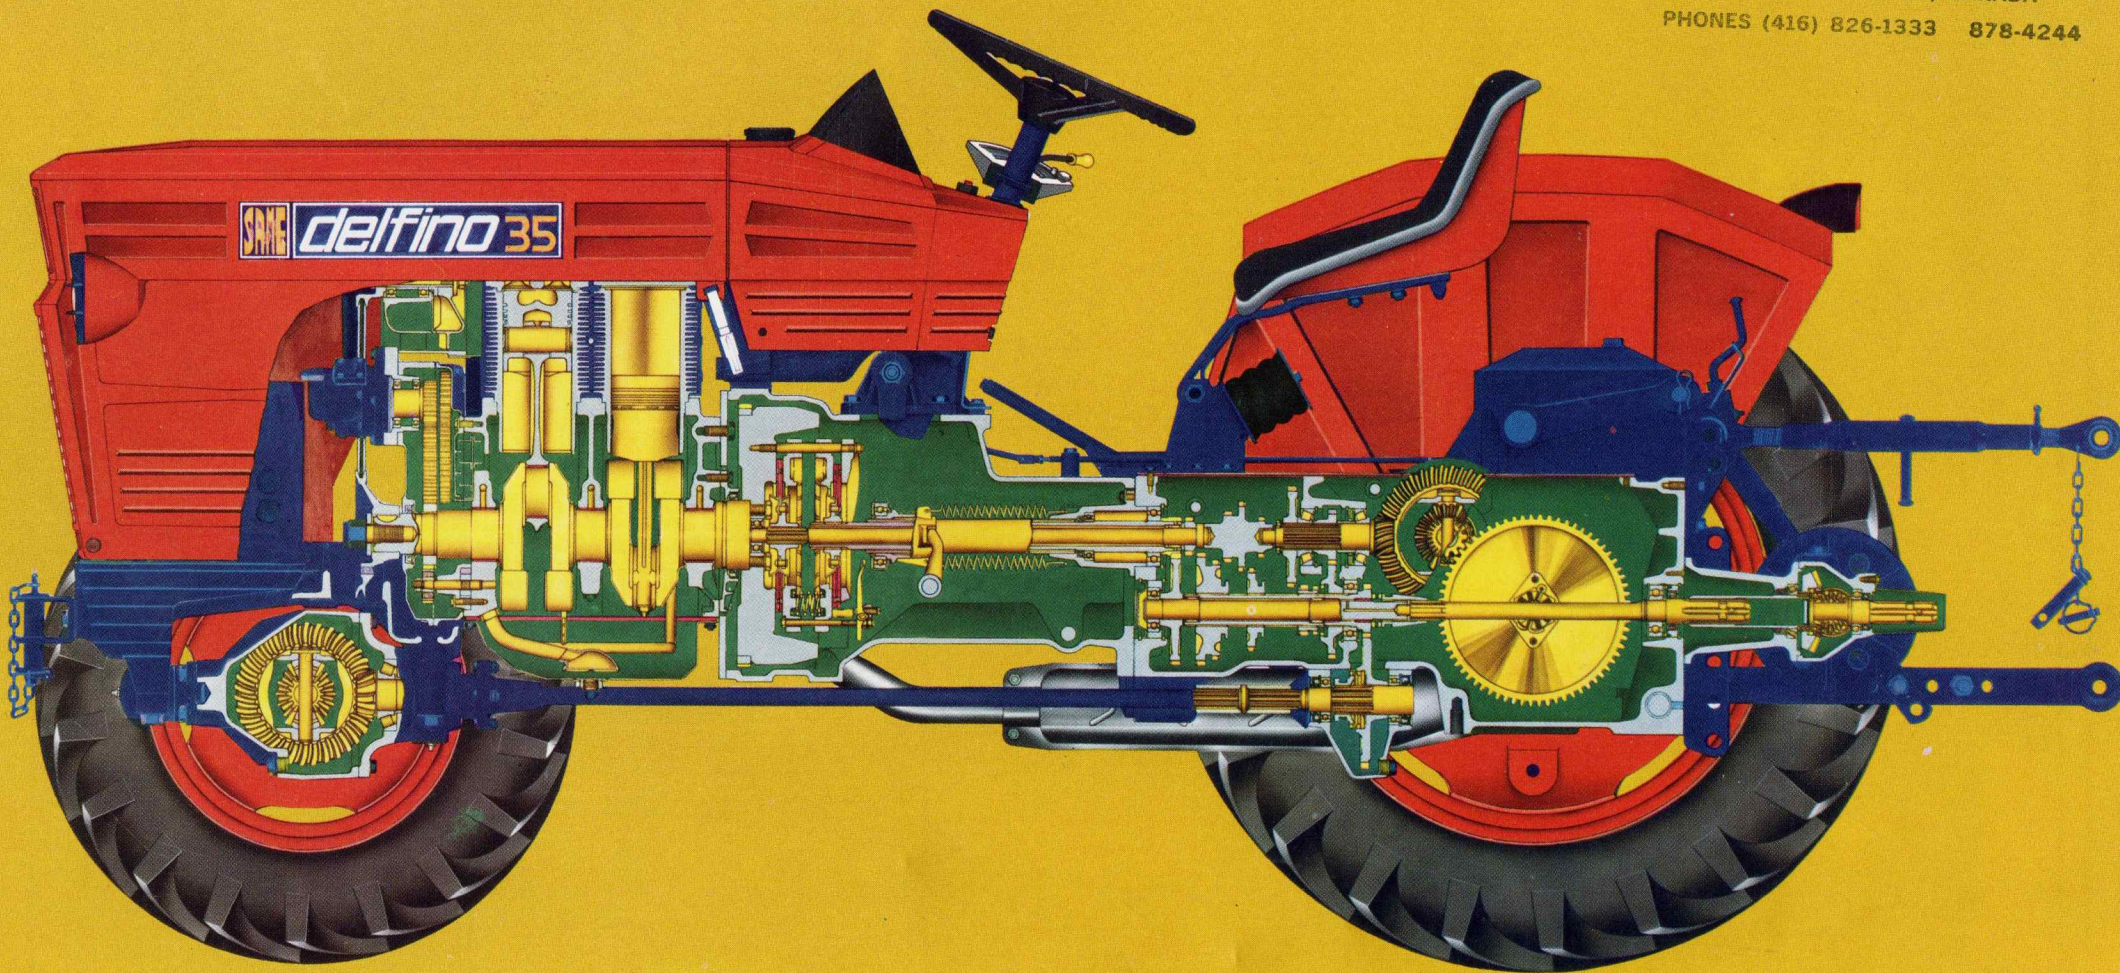

**SAME S.p.A.**  
 24047 Treviso (Italy)  
 Telex: 32472 Sametrac



the lube-oil of  
 our choice

Area Agent:

Technical data are subject to change and not binding.  
 Prop. SAME - mod. 61 - 11-73 (80)  
 Edizioni APIS - Viale Majno 26 - 20129 Milano  
 Poligrafico G. Colombi S.p.A. - 20016 Pero/Milano





# **"SAME" DELFINO 35 THE ALL-IMPLEMENT TRACTOR**

**So many implements can be operated with the "SAME" Delfino 35!  
Why not try yourselves to reach the hundred mark?**

The Delfino 35 is genuine utility tractor: the machine ideal for small organizations and of much service as auxiliary in medium and large sized organizations.

All "SAME" Agents are available for demonstrations on your premises.



