

# **SAME** minitauro

# 60




**4**-wheel drive model  
original « SAME » system

- an even surer guarantee of infallible efficiency
- a « 60 » tractor with ideal power for the toughest jobs (ploughing, work with rotary cultivator), and at the same time just as suitable for the most varied range of agricultural work
- the least costly « warhorse » on the market



- new « SAME » Diesel engine, with air-cooling
- new gearbox with mesh-up synchronizer
- powerful « SAME » Automatic Linkage Control Unit
- 4-wheel drive (original « SAME » system)
- unequalled comfort
- **Orchard** model: 2 and 4-wheel drive  
**Rice-field** model: 2-wheel drive

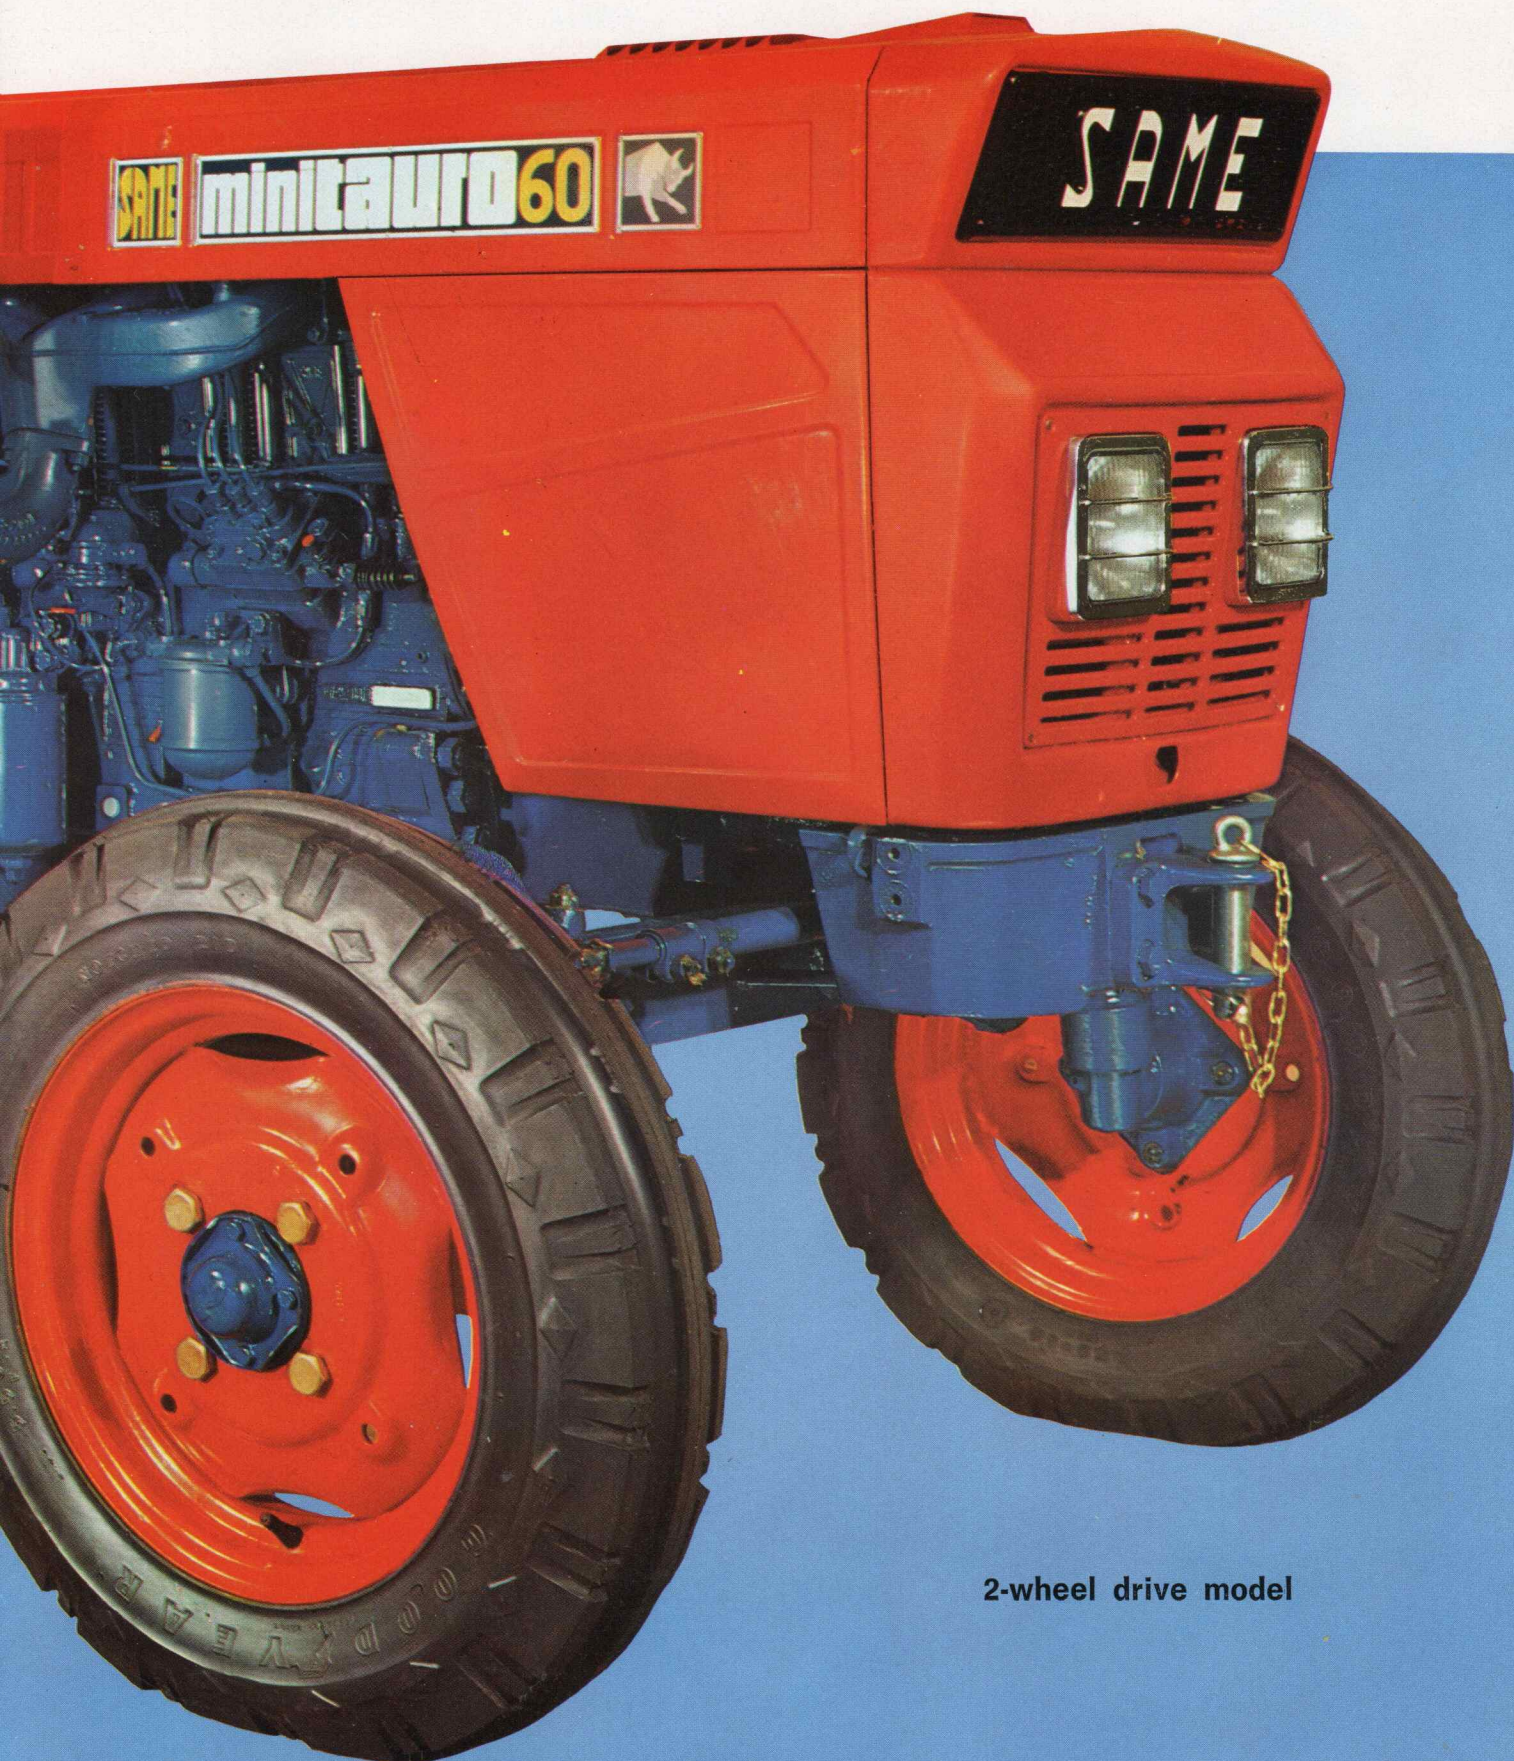

2-wheel drive model

# TECHNICAL DATA

ENGINE		DIMENSIONS	NORMAL				ORCHARD MODEL				SPEEDS in m.p.h. (Km.p.h.) at 2200 r.p.m. with rear tyres	
			2-W.D.		4-W.D.		2-W.D.		4-W.D.			
			ins	cm	ins	cm	ins	cm	ins	cm		
Model	SAME 038 - 1053	Overall length	121.7 (309)	123.0 (312)	118.1 (300)	117.3 (298)						
Fuel type	Diesel	Overall width	65.9 (167)	65.9 (167)	55.1 (140)	55.1 (140)						
Cycle	4 stroke	Overall height	59.1 (150)	59.1 (150)	55.1 (140)	55.9 (142)						
Injection	Direct	Height to hoodline	50.8 (129)	50.8 (129)	46.9 (119)	47.6 (121)						
Number of cylinders	3	Ground clearance								1st	14.9/13-28	12.4/11-24
Cylinder arrangement	in line	Wheel base	16.9 (43)	13.0 (33)	13.0 (33)	10.2 (26)				2nd	1.17 (1.88)	1.00 (1.62)
Bore	4.13385 ins (105 mm.)	Front wheel-track:	77.6 (197)	77.2 (196)	78.0 (198)	77.2 (196)				3rd	1.92 (3.09)	1.65 (2.66)
Stroke	4.72440 ins (120 mm.)	Minimum	47.2 (120)	53.9 (137)	47.2 (120)	47.2 (120)				4th	2.95 (4.76)	3.54 (4.10)
Displacement	190 cu. ins (3117 cm <sup>3</sup> )	Maximum	74.8 (190)	—	74.8 (190)	—				5th	4.09 (6.59)	3.52 (5.68)
Compression ratio	17 : 1	Rear wheel-track:	47.2 (120)	47.2 (120)	43.3 (110)	43.3 (110)				6th	4.85 (7.81)	4.18 (6.73)
Max. power	56 HP	Minimum	74.8 (190)	74.8 (190)	70.9 (180)	—				7th	6.15 (9.91)	5.30 (8.54)
R.p.m. at max. power	2200	Maximum	6.50-16	8.3/8-24	5.50-16	—				8th	10.34 (16.64)	8.91 (14.34)
Cooling	Air	Front tyres	14.9/13-28	14.9/13-28	12.4/11-24	12.4/11-24				1st rev.	15.53 (25.00)	13.40 (21.57)
Lubrication	Forced	Rear tyres	3924 (1780)	4475 (2030)	3814 (1730)	4145 (1880)				2nd rev.	1.96 (3.17)	1.69 (2.73)
Valves	Overhead	Weight	lbs Kgs	lbs Kgs	lbs Kgs	lbs Kgs				3rd rev.	3.23 (5.21)	2.78 (4.49)
										4th rev.	6.89 (11.09)	5.94 (9.56)
											10.36 (16.68)	8.93 (14.38)



area agent:

**TIMM ENTERPRISES LTD.**

the lube-oil of our choice **AGIP F.1** 204 TRAFALGAR RD. P.O. BOX 157 OAKVILLE, ONTARIO, CANADA

PHONES (416) 826-1333 878-4244

**SAME S.p.A.**  
24047 Treviso (Italy)  
Tel. 2781  
Telex: 32472 Sametrac

Technical data are subject to change and are not binding.  
Prop. SAME - mod. 102 - XII, 72 (428) - Edizioni APIS - Viale Majno, 26 - 20129 Milano (Italy)

