

New levels of versatility and performance

Reliability is the best return on your investment



ISEKI TH / TM

 **ISEKI**

TH and TM tractors



Rock-solid performance for years of use

As a professional user, it's good to work with a tractor you can count on. Already one of the most dependable in its class, the Iseki TH and TM range has been totally redesigned to provide all users with an ultra-reliable and

versatile tractor that will provide years of solid service. The 3-cylinder diesel engine has been upgraded and is both more powerful and more silent. Lift capacity has also been increased allowing for greater productivity.



High ground clearance & excellent manoeuvrability



Flip up bonnet allows easy access for maintenance.



Large capacity 3 point hitch

Specifications for better performance


- 3-cylinder Iseki diesel engine
- High torque at every engine speed
- Flip-up engine bonnet and removable side panels for easy maintenance
- 2 mechanical gearbox models with 12 speeds (9 Forward/3 Reverse)
- 3 HST models for infinite variable speeds controlled by two pedals
- Speeds up to 30 km/h for travel or transport
- Independent PTO controlled by 2-motion switch
- Auto throttle on HST models for low consumption and less noise
- Cruise control
- 4WD & differential lock
- Hydrostatic power steering
- Double hydraulic gear pump providing up to 100 kg lift capacity and a sub gear pump for power steering and HST



Ease of use enhances your driving experience

As you will be working with your Iseki for years to come these models are designed for maximum ease of use. The power steering, ergonomically positioned levers, independent PTO and throttle control (on HST models)

as well as cruise control make these Iseki tractors a very comfortable tractor that is easy to manoeuvre – day after day, year after year.

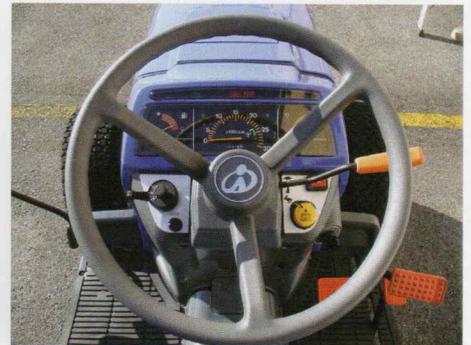

Versatility is the key to profitability

To get the most from your investment, you need to be able to use your tractor for all the various jobs that you are faced with on a weekly basis. Built to

accept a wide range of accessories, the TH and TM can handle all the pulling and lifting jobs you ask of them.



Mid mount mower

Fold down ROPS for versatility




High lift capacity front end loader with good visibility and quick attach for ease of removal



Specifications

MODEL	TM3240	TH4290 Mech	TH4330 HST
Engine			
Type	Indirect injection, overhead valve		
Displacement	1123 cc	1463 cc	1498 cc
Number of Cylinders	3	3	3
Engine Horsepower (Gross) @ engine rpm	22.8 HP (16.8 kW) at 2600 rpm	28.4 HP (21.2 kW) @ 2500 rpm	33.0 HP (24.6 kW) @ 2600 rpm
Engine Horsepower (Net) @ engine rpm	22 HP (16.8 kW) @ 2600 rpm	28.0 HP (20.6 kW) @ 2500 rpm	32.0 HP (23.5 kW) @ 2600 rpm
Fuel Tank Capacity	25 litres	30 litres	30 litres
Transmission			
Type	HST	Mechanical	HST
Gears Fwd/Rvs	2 ranges	9 / 3	3 ranges
Clutch	N/A	Dual clutch	N/A
Brakes	Mechanically actuated sealed wet discs		
Speed	0 - 22.13 km/h	1.82 - 22.19 km/h	0 - 30.84 km/h
Power Take-Off (PTO)			
Engagement	Independent, electric-hydr	Mech. Clutch	Independent, electric-hydr
Rear PTO Speed @ engine rpm	587 @ 2600 rpm	581 @ 2500 rpm	604/1092 @ 2600 rpm
Mid PTO Speed @ engine rpm	2013 @ 2500 rpm	2000 @ 2500 rpm	2000 @ 2500 rpm
Hydraulics			
Steering System; Type	Hydrostatic (power)		
Main Hydraulic System; Pump	Engine-mounted gear pump		
Maximum Output @ engine RPM	20.6 l/min @ 2600 rpm	28.0 l/min @ 2600 rpm	29.2 l/min @ 2600 rpm
3-Point Lift	Category 1		
Lift Capacity	550 kg measured at ball ends	1100 kg measured at ball ends	1100 kg measured at ball ends
Electrical System			
Alternator	40 amp		
Dimensions			
Tyre	Turf	Turf STD	Turf STD
Height of Steering Wheel	1340 mm	1370 mm	1370 mm
A1 Overall Height (ROPS)	2325 mm	2350 mm	2350 mm
A2 Overall Width	1230 mm (rear tyre)	1330 mm	1260 mm
B Overall Length	2680 mm	2920 mm	2920 mm
C Wheelbase	1520 mm	1665 mm	1665 mm
D Min Ground Clearance (at mid PTO case)	245 mm	195 mm	195 mm
E Weight (with ROPS)	680 kgs	940 kgs	990 kgs
Tyre (turf) Front	23 x 10.50 - 12	24 x 8.50 - 12	24 x 8.50 - 12
Tyre (turf) rear	315 / 75D - 5	315 / 80D - 16	315 / 80D - 16
Tyre Variation			
Many Ag and Turf Tyre Options Available On Request			

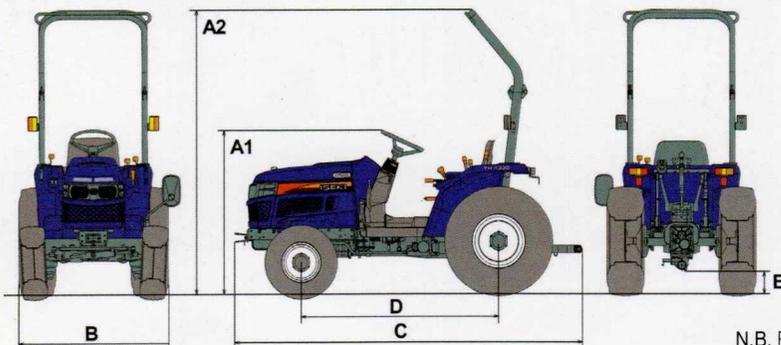

N.B. Please check with your local dealer as some optional extras may not apply.
Note: The technical features may be altered without prior notice.