

Kubota®

KUBOTA DIESEL TRACTOR

The Kubota MX5000 strikes the perfect balance - impressive power, exceptional versatility and compactness without compromise.

MX5000



Now, multi-taskers have a multi-purpose tractor that's in a class all its own.


Introducing the all-new 2WD/4WD MX5000 from Kubota - larger and more powerful than our L-Series tractors, yet more nimble and affordable than our M-Series tractors. It's the do-it-all tractor for those who do it all.



Kubota's enhanced features com you unparalleled performance at

Advanced full-open tilt hood. Enhanced operator comfort.

Kubota's full-open tilt hood and flat deck platform offer a number of advantages to users who are constantly on the go. The hood allows you to perform engine maintenance quickly and efficiently. The MX5000's powerful 50HP Kubota diesel engine with built-in balancer, coupled with its contoured deck platform achieves lower noise vibration. The full flat deck enables easy and safe tractor mounting or dismounting. We have added hanging pedals for more leg room and we have moved the Shuttle Lever to the left side of the driver's seat for easy operation. With the MX5000, ease-of-maintenance, convenience and comfort have been taken to a whole new level.

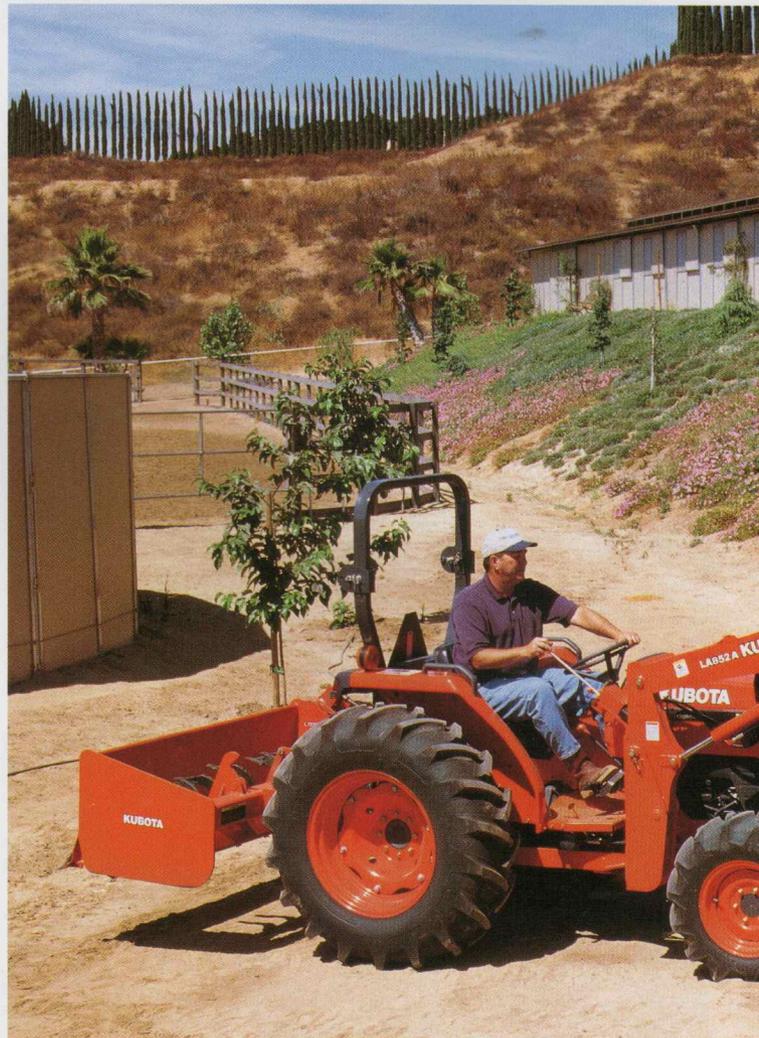

Attention, homeowners, farmers and landscapers Multi-tasking just got a whole lot easier with t

Large Capacity Front Loader

Kubota's performance matched loaders give you the capacity, muscle and steady performance you need for complete operating versatility. You can choose the basic LB702 or the heavy duty LA852-1 depending on your job. A large lifting capacity and high lift heights increase over-all performance. Furthermore, an optional Quick Coupler attachment offers increased versatility for pallet forks and bale spears.

New User Friendly Attach/Detach System

The quick attachment and detachment of the loader can be done easily and within minutes, without the use of tools. Simply lower the boom stands, and remove the mounting pins and hose couplers. What's more, this innovative design increases productivity and efficiency.

Easy Joy Stick Control

The simple movement of a single joy stick lever control performs all front loader actions - Boom Raise/Lower and Bucket Roll Back/Dump as well as combined movements. Once released, the lever automatically returns to neutral with the loader stopping in place. Additionally, a float position is provided that enable



**bine form and function to give
a reasonable price.**



New Performance Matched 3-Point Hitch

The improved design and durability of Kubota's versatile new 3-point hitch will enable you to experience the full power and capabilities of the MX5000. The carefully constructed telescopic lower link end, crank-type lift rod and stabilizers give users 2,315 lbs. (1,050kg) of lifting capacity. While the easy-to-attach/detach Category 1 implements allow you to maximize your output with minimal labor. Thus, combined with Category II implements, you have a versatile 3-point hitch.




**ers!
e MX5000.**

the bucket to float freely over ground surfaces when fine scraping is required.





KUBOTA NEW CONCEPT UTILITY TRACTOR **MX5000**

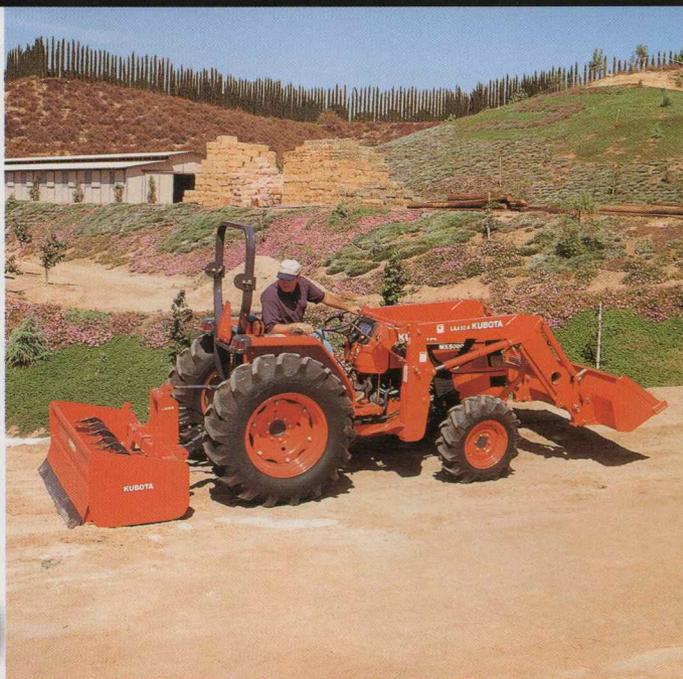

New Synchro Transmission

The MX5000 lets you spring into gear with its high-powered 50 net engine HP and mechanical shuttle transmission. By implementing an independent and hydraulic PTO clutch system, it generates 44 PTO horsepower. Additionally, a smooth and agile performance is achieved by its new hanging clutch and brake pedals, which provide easier maneuverability when shifting. What's more, for increased productivity, you get maximum output from the MX5000 when using the basic LB 702 (1852 lbs. lifting capacity at pivot pin) or the heavy-duty LA 852-1 (2469 lbs. lifting capacity at pivot pin) front loaders.



Specifications

Model	MX5000		
Engine	V2403		
Type (Make: KUBOTA)	E-TVCS, Indirect injection, liquid cooled diesel		
Engine net power	HP (kW)	50 (37.3) @2700 rpm	
PTO power	44 (32.8)@2700 rpm		
No. of cylinders/Aspiration	4 / Natural		
Total displacement	cu. in. (cc)	148.5 (2434)	
Fuel tank capacity	gal. (ℓ)	13.2 (50)	
Air cleaner	Dry, dual-element		
Alternator	Amp	40	
Transmission	8F/4R		
No. of speeds	Partially synchronized (3rd & 4th)		
Main gear shift (4 speeds)	Mechanical Shuttle/Range shift lever (L-R)		
Shuttle	Dry single plate		
Main clutch	Mechanical wet disc		
Brake	Rear standard (mechanical)		
Differential lock			
PTO	Live-independent, hydraulic PTO with PTO brake, wet clutch		
PTO type	540 rpm		
Speed			
Hydraulics	9.2 (34.9)		
Pump capacity (3-point hitch)	gpm (ℓ/min.)	Telescopic lower link ends, Telescopic stabilizers, Crank-type lift rod	
3-point hitch	I & II		
Category	Position (std), Draft (opt)		
Control system	2315 (1050)		
Lift capacity at 24 in. behind lift point	lbs. (kg)	Maximum 3 (opt)	
No. of remote valves			
Tires			
Standard ^(*)	2WD	Front/Rear	7.5L-15/14.9-26, 13.6-28
	4WD	Front/Rear	9.5-16/14.9-26, 13.6-28
Travelling speeds (w/std. Ag. tires)			
No. of speeds (at rated engine speed)			
First	Fifth	mph (km/h)	Forward
Second	Sixth		Reverse
Third	Seventh		
Fourth	Eight		
Other features	4WD drive system (4WD model) Bevel gear type		
Steering	Hydrostatic power steering		
Hood type / Pedal type	Full open hood / Hanging pedals		
Deck type	Flat		
Dimensions & weight			
Overall length	2WD/4WD in. (mm)	132.5 (3365) / 130.5 (3315)	
Overall height (top of ROPS)	in. (mm)	93.1 (2365)	
Overall width (Minimum)	in. (mm)	69.7 (1770)	
Wheelbase	2WD/4WD in. (mm)	73.8 (1875) / 74.6 (1895)	
Min. ground clearance	2WD/4WD in. (mm)	15.9 (405) / 15.2 (385)	
Tread width	Front	2WD/4WD in. (mm)	47.8-59.6 (1215-1515) / 52.2 (1325)
	Rear	in. (mm)	54.1-58.7 (1375-1490)
Turning radius (w/ brake)	2WD/4WD ft. (m)	8.5 (2.6) / 8.9 (2.7)	
Tractor weight	2WD/4WD lbs. (kg)	3285 (1490) / 3560 (1615)	

The company reserves the right to change the above specifications without notice.

This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information.

For your safety, KUBOTA strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in all applications.

Not for sale in Nebraska. ^(*)Kubota offers several tire options. ^(**)4WD engaged.

©2001 Kubota Corporation



KUBOTA TRACTOR CORPORATION

Kubota Tractor Corporation, 3401 Del Amo Boulevard, Torrance CA 90503
 Western Division: 6665 E. Hardaway Rd., Stockton, CA 95215 Tel (209) 931-5051
 Central Division: 14855 FAA Boulevard, Fort Worth, TX 76155 Tel (817) 571-0900
 Northern Division: 2626 Port Rd. Columbus, OH 43217 Tel (614) 492-1100
 Southeast Division: 1025 North Brook Parkway, Suwanee, GA 30024 Tel (770) 995-8855

Visit our web site at: www.kubota.com

