

More than 170 years ago, a man named McCormick helped mechanize American farming. Today, the tractors that bear his name are setting new standards for proven performance and practical innovation.



Introducing  
the **REAL**

**McCORMICK**

  
**McCORMICK™**  
INTERNATIONAL USA, INC.

**M**ccormick's 5-model MTX Series tractors (118-176 engine hp) are overbuilt with practical, proven technology designed to maximize reliability, economy and comfort.



A 6-cylinder turbocharged Perkins diesel is ISO mounted, delivering power and torque smoothly and quietly. A power-shuttle transmission provides fingertip forward/neutral/reverse control without conventional clutching – simplifying baler and loader work. The highly responsive load-sensing hydraulic system constantly monitors hydraulic demand and adjusts flow output, to reduce cycle


times and fuel consumption. A 4-speed powershift enables effortless shifting of gears with thumb-switch control.

**Additional features:**

- ▶ Independent front suspension available
- ▶ Unobstructed 326-degree visibility
- ▶ 16 forward + 12 reverse speeds – 32/24 creeper available
- ▶ Oil-cooled transmission clutch
- ▶ Quietest cab available
- ▶ Electronic PTO

# MTX

McCormick MTX Series Tractors

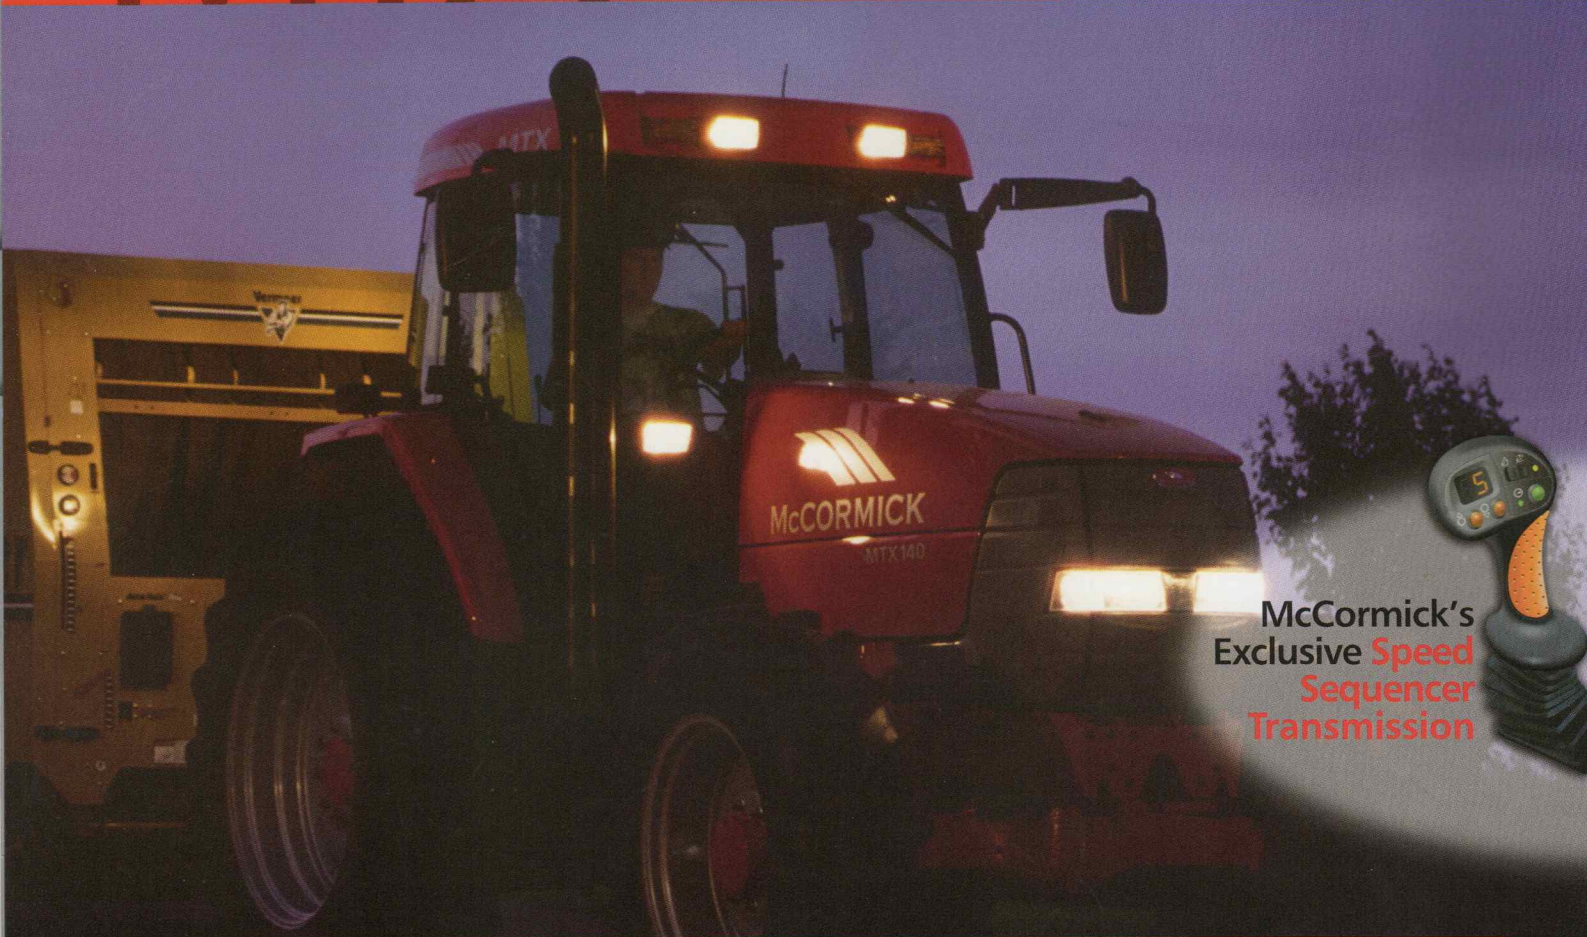

McCormick's  
Exclusive **Speed  
Sequencer  
Transmission**



TECHNICAL DATA	MTX110	MTX125	MTX140	MTX155	MTX175
Power at rated speed – Engine/PTO hp (kW)	118/100 (87/75)	132/113 (97/84)	147/127 (108/95)	163/141 (120/105)	176/155 (129/116)
No. of cylinders/turbo/wastegate/intercooler	6T	6T	6T	6TWI	6TWI
Displacement – cu. in. (liters)	366 (6)	366 (6)	366 (6)	366 (6)	366 (6)
Maximum lift capacity, std./assist. ram – lbs. (kg)	12943/14554 (5871/6602)	12943/14554 (5871/6602)	14554 (6602)	18357 (8327)	18357 (8327)
Fuel tank capacity – gal. (liters)	70 (265)	70 (265)	70 (265)	92 (348)	92 (348)
Wheelbase – in. (mm)	109 (2770)	109 (2770)	109 (2770)	112 (2850)	112 (2850)
Weight with standard equipment – lbs. (kg)	13007 (5900)	13227 (6000)	13581 (6160)	16116 (7310)	16557 (7510)

The three-model McCormick MC Series tractors (90-115 engine hp) are built with the ideal combination of power, speed and agility.



With a 4-cylinder Perkins diesel engine, the McCormick MCs can take on any job from medium-duty field work to livestock duties to putting up hay. An exceptionally tight 55-degree turning angle makes the MC ideal for dairy operations and other "tight quarter" chores. The MC115 – featuring an air-to-air intercooled engine – is one of the most powerful 4-cylinder tractors

on the market today, producing 6-cylinder low-speed lugging ability from a 4-cylinder engine.

**Additional features:**

- ▶ Pressure flow compensating hydraulics
- ▶ Electronic hitch control
- ▶ Tilt-back hood for easy serviceability
- ▶ Unobstructed 326-degree visibility
- ▶ 16 forward + 12 reverse speeds – 32/24 creeper available
- ▶ Oil cooled transmission clutch
- ▶ Quietest cab available
- ▶ Electronic PTO

# MC

McCormick MC Series Tractors



(available on both MTX and MC series tractors) allows the operator to shift through the speeds – and skip between ranges – with the touch of a button.

TECHNICAL DATA	MC90	MC100	MC115
Power at rated speed – Engine/PTO hp (kW)	90/74 (66/55)	102/83 (75/62)	115/96 (85/72)
No. of cylinders/turbo/wastegate/intercooler	4TWG	4TWG	4TWGI
Displacement – cu. in. (liters)	244 (4.0)	244 (4.0)	244 (4.0)
Maximum lift capacity – lbs. (kg)	12943 (5871)	12943 (5871)	12943 (5871)
Fuel tank capacity – gal. (liters)	52 (196)	52 (196)	52 (196)
Wheelbase – in. (mm)	95 (2413)	95 (2413)	99 (2517)
Weight with standard equipment – lbs. (kg)	11905 (5400)	11905 (5400)	12114 (5495)

The workhorse McCormick CX Series tractors (73-102 engine hp) are some of the most rugged and versatile in the field today.




Featuring a lean-burning, high-torque 4-cylinder Perkins engine, the CX is the ideal medium-duty tractor for hay, loader or livestock work. A highly efficient synchromesh shuttle transmission, outstanding torque rise and available 2-speed powershift with optional creep speed make the CX easy to operate. Outstanding hood access

for daily service makes the CX easy to maintain. And your choice of a deluxe, canopy or ROPS cab makes it easy on your wallet.

**Additional features:**

- ▶ Electronic hitch control
- ▶ Tilt-back hood for easy serviceability
- ▶ Unobstructed 326-degree visibility
- ▶ 16 forward + 8 reverse speeds – 24/12 creeper available
- ▶ Quietest cab available

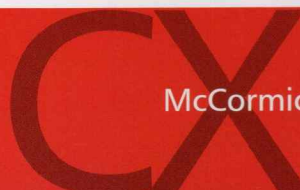

**McCormick CX Series Tractors**



TECHNICAL DATA	CX70	CX80	CX90	CX100
Power at rated speed – Engine/PTO hp (kW)	73/58 (54/43)	84/67 (62/50)	90/74 (66/55)	102/83 (75/62)
No. of cylinders/turbo/wastegate	4	4T	4TWG	4TWG
Displacement – cu. in. (liters)	244 (4.0)	244 (4.0)	244 (4.0)	244 (4.0)
Maximum lift capacity – lbs. (kg)	4497 (2040)	4497 (2040)	4497 (2040)	4497 (2040)
Fuel tank capacity – gal. (liters)	41 (155)	41 (155)	41 (155)	41 (155)
Wheelbase 2WD/4WD – in. (mm)	88.1/92.8 (2237/2356)	88.1/92.8 (2237/2356)	88.1/92.8 (2237/2356)	88.1/92.8 (2237/2356)
Weight DL Cab: 2WD/4WD – lbs. (kg)	7397/8466 (3355/3840)	7397/8466 (3355/3840)	7397/8466 (3355/3840)	7397/8466 (3355/3840)

The McCormick C Series tractors (73-102 engine hp) are far from the no-frills units you'd expect in their class.



These tractors are built for the value-minded producer/rancher who can't afford to compromise on quality or dependability. All 4 models feature 4-cylinder Perkins engines and synchromesh transmissions. A 15.5 gpm hydraulic output and outstanding lift

capacity make the C an ideal choice for livestock and specialty operations, small acreages or "sundowner" producers.

**Additional features:**

- ▶ Outstanding, proven performance
- ▶ Easy serviceability
- ▶ 8 forward + 4 reverse speeds standard
- ▶ 16/8, 8/8 with hydraulic shuttle, and 24/12 creep available.
- ▶ Synchromesh shuttle FWD/REV
- ▶ Optional MFD with push button engagement

# C

McCormick C Series Tractors



TECHNICAL DATA	C 70	C 80	C 90	C 100
Power at rated speed – Engine/PTO hp (kW)	73/58 (54/43)	84/67 (62/50)	90/74 (66/55)	102/83 (75/62)
No. of cylinders/turbo	4	4T	4T	4T
Displacement – cu. in. (liters)	256 (4.2)	244 (4.0)	244 (4.0)	244 (4.0)
Maximum lift capacity – lb. (kg)	3665 (1662)	3665 (1662)	3665 (1662)	3665 (1662)
Fuel tank capacity – gal. (liters)	30 (113.6)	30 (113.6)	30 (113.6)	30 (113.6)
Wheelbase 2WD / 4WD – in. (mm)	84.3/88 (2141/2235)	84.3/88 (2141/2235)	84.3/88 (2141/2235)	84.3/88 (2141/2235)
Shipping weight 2WD / 4WD – lbs. (kg)	5941/6658 (2695/3020)	5941/6658 (2695/3020)	5963/6691 (2705/3035)	5963/6691 (2705/3035)

The McCormick V and F Series tractors (54-93 engine hp) are engineered specifically for vineyard and orchard operations where compact design, maneuverability, power and stability are essential.



The V and F series' model variations include low clearance, long wheel base and wide wheel base options as well as deluxe cab or ROPS configurations to fit any production requirements. All models are powered by Perkins new-generation 3- and 4-cylinder engines. VF Series tractors feature a smooth,

simple speed shuttle transmission with available creep and underdrive options, to provide maximum control.

**Additional features:**

- ▶ Hydraulically controlled PTO lever
- ▶ Integral Braking System (IBS)
- ▶ 55-degree turning angle
- ▶ Quiet cab for operator comfort
- ▶ L/XL/GE variations available (Wider Tractor / Long Wheelbase / Ground Effects-Low Profile)

# V F

McCormick VF Series Tractors



TECHNICAL DATA	V60	V65	V70	V80	
Power at rated speed – Engine/PTO hp (kW)	54/49 (40/37)	65/57 (48/43)	68/61 (50/46)	78/72 (58/54)	
Number of cylinders /turbo	3/NA	3/T	4/NA	4/NA	
Displacement – cu. in. (liters)	164 (2.7)	164 (2.7)	243 (3.99)	257 (4.22)	
Standard lift capacity – lbs. (kg)	5732 (2600)	5732 (2600)	5732 (2600)	5732 (2600)	
Fuel tank capacity – gal.(liters)	14 (53)	14 (53)	14 (53)	14/16 (53/60.6)	
Wheelbase – in. (mm)	80.5-81.7 (2046-2075)	80.5-81.7 (2046-2075)	82.7-83.8 (2100-2130)	82.7-83.8 (2100-2130)	
Weight with std. equipment – lbs. (kg)	4718-5600 (2140-2540)	4718-5600 (2140-2540)	5005-5908 (2270-2680)	5005-5908 (2270-2680)	
TECHNICAL DATA	F60	F70	F80	F90	F100
Power at rated speed – Engine/PTO hp (kW)	54/49 (40/37)	68/61 (50/46)	80/72 (60/54)	88/81 (65/60)	93/86 (68/64)
Number of cylinders /turbo	3/NA	4/NA	4/NA	4T	4T
Displacement – cu. in. (liters)	164 (2.7)	243 (3.99)	257 (4.22)	243 (3.99)	243 (3.99)
Standard lift capacity – lbs. (kg)	5732 (2600)	5732 (2600)	5732 (2600)	5732 (2600)	5732 (2600)
Fuel tank capacity – gal. (liters)	14/16 (53/60.6)	14/16 (53/60.6)	14/16 (53/60.6)	14/16 (53/60.6)	14/16 (53/60.6)
Wheelbase – in. (mm)	74.8-77.2 (1900-1960)	79.3-81.5 (2014-2070)	79.3-81.5 (2014-2070)	84-86.2 (2134-2190)	84 (2134)
Weight with std. equip. – lbs. (kg)	4674-5886 (2120-2670)	4982-6437 (2260-2920)	5115-6305 (2320-2860)	5214-6570 (2365-2980)	5467-6570 (2480-2980)

The McCormick GX and GXH Series tractors (38-50 engine hp) are ideal for landscaping and grounds maintenance as well as small acreage duties and specialty uses.



Built with best-of-class engineering and components, these compact tractors feature a 52-degree steering angle for excellent maneuverability. A unique 1000-rpm mid-mount and front-mount PTO is available, complementing the 540 rear PTO, allowing for unique implement options not available with

competitive models. The GXH models feature a 3-speed hydrostatic transmission with a speed variator and "cruise control."

**Additional features:**

- ▶ 12/12 transmission standard on GX
- ▶ One-piece hood for easy access and maintenance
- ▶ 13.2-gallon fuel tank capacity
- ▶ Cat. 1 3-point linkage
- ▶ Foldable ROPS for low clearance
- ▶ Up to 3 remotes for a wide variety of applications

# GX

McCormick GX Series Tractors



TECHNICAL DATA	GX40	GX40H	GX45	GX45H	GX50	GX50H
Power at rated speed – Engine/PTO hp (kw)	37.5/30 (28/22)		44/36.5 (33/27)		49.5/41 (37/31)	
No. of cylinders	3		4		4	
Displacement – cu. in. (liters)	100 (1.64)		122 (2.0)		134 (2.19)	
Fuel tank capacity – gal. (liters)	13.2 (50)		13.2 (50)		13.2 (50)	
Maximum lift capacity – lbs.(kg)	2646		2646		2646	
Total wt. (w/o 265 lb. ballast) 2WD/4WD mech. trans. – lbs. (kg)	3175/3351 (1440/1520)		3197/3373 (1450/1530)		3197/3373 (1450/1530)	
Total wt. (w/o 265 lb. ballast) 2WD/4WD hydro. trans. – lbs. (kg)	3285/3461 (1490 / 1570)		3307/3483 (1500/1580)		3307/3483 (1500/1580)	
Wheelbase 2WD/4WD – in. (mm)	70.9/71.7 (1800/1821)		70.9 / 71.7 (1800/1821)		70.9 / 71.7 (1800/1821)	



This literature has been published for worldwide circulation. The standard and optional equipment and the availability of individual models may vary from one country to the next. McCormick International USA, Inc., reserves the right to undertake modifications without prior notice to the design and technical equipment at all times without this resulting in any obligation whatsoever to make such modifications to units already sold. While every effort is made to ensure that the specifications, descriptions and illustrations in this brochure are correct at the time of going to press, these are also subject to change without prior notice. Illustrations may show optional equipment or may not show all standard equipment.



McCormick International USA, Inc. • P.O. Box 81 • Pella, Iowa 50219 • 1-866-327-6733 • [www.mccormickusa.com](http://www.mccormickusa.com)