

VALTRA

Power Partner

A Series

63 - 98 hp



A Series

Valtra's light and nimble A Series tractors are well suited for all kinds of farm work year-round. Their small size, compact build and manoeuvrability are clear advantages on crop and cattle farms as well as in forest and municipal work. The A Series tractors are also popular as front loaders due to their forward/reverse shuttle which allows easy changes of direction. The modern A Series' engines and efficient, direct power transmissions save fuel.

VALTRA

Power Partner

A Series:

Valtra A65-2, 46 kW/63 hp

Valtra A65-4, 46 kW/63 hp

Valtra A75-2, 54.5 kW/74 hp


Valtra A75-4, 54.5 kW/74 hp

Valtra A85-2, 64.5 kW/88 hp

Valtra A85-4, 64.5 kW/88 hp

Valtra A95-2, 72 kW/98 hp

Valtra A95-4, 72 kW/98 hp

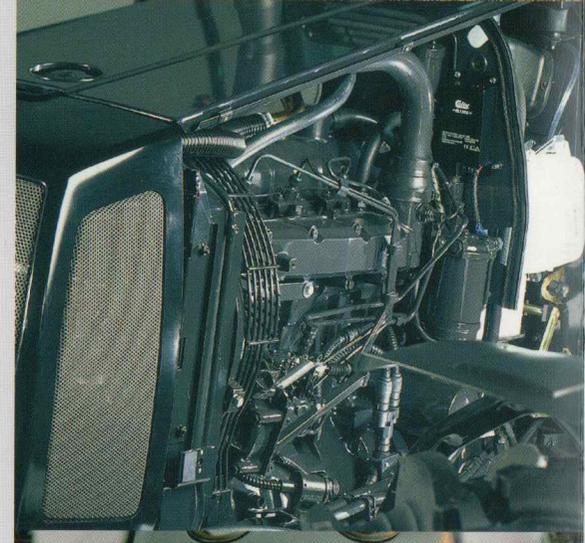



Cab

– the Driver's Workroom

Comfort and safety

The A Series cab is spacious and practical. Wide, rear-opening doors offer safe entrance from both sides of the tractor. Strong, self-cleaning steps and substantial grip handles give safe access. An interior cab light turns on when the door is opened for added safety.

You are able to see what you are doing

Large windows, a sloping hood and narrow instrument panel allow excellent visibility to the front wheels and front-mounted equipment. Visibility to the sides and to the rear is equally impressive.

The seat can be turned sideways or 180 degrees. You can work in the position best suited for each task. If you drive a great deal, a seat with air suspension is a sensible choice.


A front windshield which opens is also available. This is especially useful when entering cattle sheds in winter or coupling implements to the front.

Everyone can find a comfortable driving position with the right distance to the controls.

The forward/reverse shuttle lever can also be placed on the left side of the seat.

Sufficient visibility in every direction is important for safety and efficiency.

There is a heater in the cabin underneath the instrument panel. More heating, and especially ventilation, can be attained by installing a heating/ventilation system in the roof (not in low cabins).

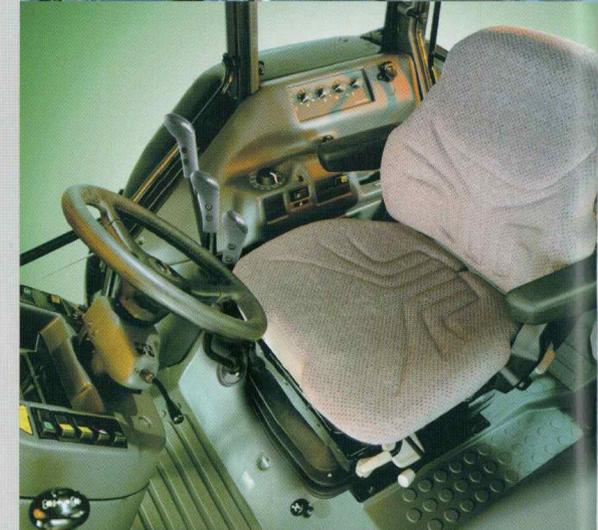


The A Series cab is ideal for manoeuvring in confined spaces. The seat can be easily adjusted to obtain the most comfortable driving position. The controls are positioned near the operator, on the right-hand side.



Strong Torque And Performance

The advanced engine

The A Series tractors with 20-series Valtra engines have strong torque. The Valtra engines are specially designed for tractor use, and are made at Valtra's own engine factory. The same engines are also used by several other leading tractor manufacturers around the world.

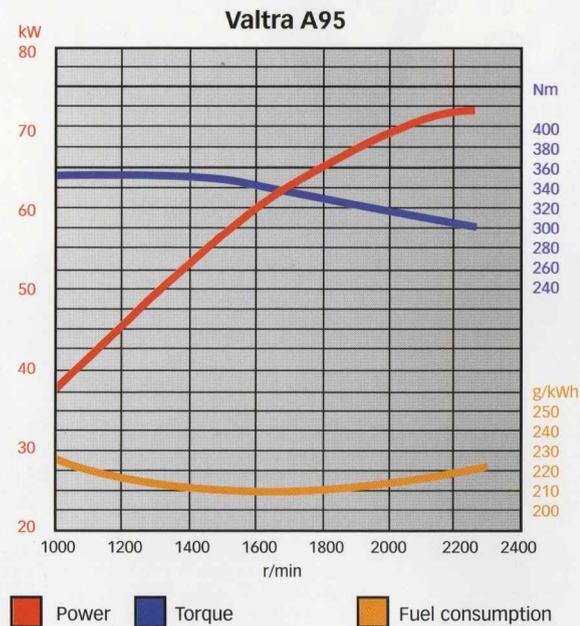

The excellent efficiency of Valtra engines results in remarkably low fuel consumption. Strong torque is needed when operating under heavy loads, or when working with low revolutions.



The battery, starter motor, and alternator are all high capacity. The ejector type air intake of the four-cylinder models makes air filter servicing virtually unnecessary.



The precise and easy-to-operate Autocontrol linkage

The Powerlift can be controlled mechanically with one lever, or by using the optional Autocontrol electronic controls. The Autocontrol Powerlift is also equipped with push buttons on the rear mudguards. Autocontrol includes Drive Balance Control which acts like a shock absorber when carrying heavy implements on the linkage over uneven ground.

Autocontrol:

- Position control/working depth
- Quick control/up-down
- Choice of draft control adjustment
- Adjustment of lowering speed
- Setting of maximum lifting height
- Powerlift's control switch
- Forced lowering switch
- Drive Balance Control (DBC)

Effective Transmission



- Fully synchronized transmission
- Forward/reverse shuttle as standard
- Gears light to operate
- Variable transmission options
- Minimal power losses
- Pressurized lubrication of transmission
- Optional HiShift clutch control
- Four-wheel drive cardan shaft well protected, does not reduce ground clearance
- Reliable differential lock
- Excellent drive clutch
- Hydraulics has separate oil, thus bio oil can be utilized

Speed ranges 12F+12R gears (standard)



With 16.9R34 tires

Working Hydraulics

The tractor is equipped with separate oil for the hydraulic system. Output of the hydraulic pump is up to 55 litres per minute in the A85/95 models. Effective oil filtration is a standard feature. The two standard auxiliary valves are easy to control with only one lever. Two additional valves are an option, and they can be chosen to suit the special requirements of the customer. The efficiency and effectiveness of the tractor's lifting range and Powerlift geometry is further demonstrated by Valtra's success at plowing competitions.

Valtra A Series – for Different Kinds of Work




A Series in the Field

Manoeuvrable and ease of use

The A Series tractors are light and easy to operate. Their basic construction is four-wheel drive, but a two-wheel drive version of all models is available. The two-wheel drive models are well suited for work where agility is required.

Excellent hydraulics both front and rear

Lifting capacity of the A Series is almost the same as the tractor's own weight.

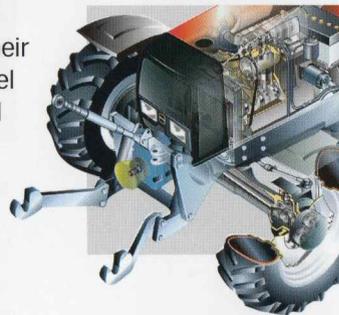

A Series on a Cattle Farm

Easy manoeuvring

The agile and yet efficient A Series tractor is also popular as a front loader. Their small size is ideal for the various tasks performed on the farm. The versatile transmission together with the HiShift clutch make work more efficient.

Power not lost on the way

Transmission of the A Series is purely mechanical resulting in excellent performance and lower fuel consumption. The A Series transmission is a joy to use. All gears are easy to find and engage.



HiShift, or the "push button clutch", relieves the driver from using the clutch pedal. Clutch operation is done by pushing the gear lever buttons. Valtra A Series tractors are the only ones in this size category available with the push button clutch.



A Series in the Forest

For versatile tasks

Due to its compact structure and flat bottom, the A Series tractor is excellent for forest work. It is also extremely versatile and efficient for demanding municipality tasks year-round.



The A Series Valtra, as a low model version with small tires, is well suited to property maintenance work.




The A Series tractor is the best in its class for forest work. The Forest cab provides room to turn around, and has ample legroom in the back. A rear accelerator pedal is standard equipment in the Forest cab.

Technical Specifications

Dimensions and Weights

Tractor	Tires Rear/ Front	A, mm	B, mm	C, mm	D, mm	E, mm	F, mm	Fi, mm	Weights, kg
A65-2, A75-2	13.6R36 / 10.00-16	3745	2112	2139	2630 ¹⁾	2625	505	460	3210
A65-4, A75-4	13.6R36 / 12.4R24	3860	2255	2139	2630 ¹⁾	2625	427	450	3390, 3440 ²⁾
A85-2, A95-2	14.9R38 / 10.00-16	3877	2244	2177	2695 ¹⁾	2676	505	495	3330, 3360 ³⁾
A85-4, A95-4	14.9R38 / 12.4R28	4043	2387	2177	2700 ¹⁾	2700	472	495	3560, 3590

1) 155 mm lower with the low cabin. 2) With 13.6R24 front tires. 3) With 10.00-16 front tires (weights with full tank).

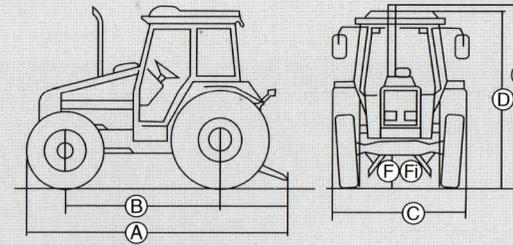

A = Overall length
 B = Wheel base
 C = Width
 D = Height to top of cab (std cab)
 E = Height to top of exhaust pipe
 F = Clearance under front axle
 Fi = Clearance under rear axle

	A65	A75	A85	A95
Engine	320DE	320DSRE	420 DSRE	420 DSRE
Max power, kW(hp)/rpm*	46(63)/2270	54.5(74)/2270	64.5(88)/2270	72(98)/2270
Max torque Nm/rpm	224/1400	296/1400	324/1400	359/1400
No. of cyls.	3	3 Turbo	4	4 Turbo
Capacity, L	3.3	3.3	4.4	4.4
Power transmission	Full synchronized			
Gears forward/reverse				
12+12R	Standard	Standard	Standard	Standard
16+8R, splitter	Options factory fitted	Options factory fitted	Options factory fitted	Options factory fitted
HiShift (only for 55 L pump)	Options factory fitted	Options factory fitted	Options factory fitted	Options factory fitted
PTO 540+540E	Options factory fitted	Options factory fitted	Options factory fitted	Options factory fitted
PTO 540+1000	Standard	Standard	Standard	Standard
Hydraulic	Separate hydraulics oil. Max. amount of oil for external hydraulics, 24 litres			
Max lifting power, kN	28	28	33	33
Max lifting power with extra cylinder, kN	33	33	-	-
Max pump capacity, L/min	40	40	55	55
Auxiliary hydraulics, L/min	55	55	-	-
Autocontrol	Options factory fitted	Options factory fitted	Options factory fitted	Options factory fitted

* ISO 14396

Standard Options factory fitted Options dealer fitted

Speed ranges, km/h 16+8R gearbox (with 16.8R34 tires)				
	Low range	Low range+splitter	High range	High range+splitter
1	3.5	4.1	12.2	14.0
2	4.8	5.6	16.7	19.2
3	7.6	8.8	26.4	30.3
4	10.1	11.6	34.9	40.2
1R			4.8	5.5
2R			6.6	7.5
3R			10.3	11.9
4R			13.7	15.7


Speeds with the 12+12R gearbox on page 7.

	A65	A75	A85	A95
Engine				
Mechanical hydraulic	Standard	Standard	Standard	Standard
Auxiliary valves	Standard	Standard	Standard	Standard
1. Out-hold-in-floating	Standard	Standard	Standard	Standard
2. Out-hold-in	Standard	Standard	Standard	Standard
3. Valve	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
4. Valve	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Trailer brake valve	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Free flow return	Standard	Standard	Standard	Standard
Telescopic link ends	Standard	Standard	Standard	Standard
Ball-Hitch link ends	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Hydraulic top link	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Lift rod hydraulically adjustable	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Hydr. pick-up hitch	Options factory fitted	Options factory fitted	Options factory fitted	Options factory fitted
Agricultural drawbar	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Other				
Front mudguards	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Rear wheel weights	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Front weights	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Main switch	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Front linkage	Options dealer fitted	Options dealer fitted	Options dealer fitted	Options dealer fitted
Front PTO	Options factory fitted	Options factory fitted	Options factory fitted	Options factory fitted

Tire Options								
Rear/Front	A65	A65-4	A75	A75-4	A85	A85-4	A95	A95-4
16.9R30/8 / 10.00-16/8	•		•		•		•	
16.9R34/8 / 10.00-16/8			•		•		•	
16.9-34/8 / 13.6-24/8		•		•		•		•
520/70R34 / 420/70R24						•		•
480/70R34 / 380/70R24		•		•		•		•
13.6R38 / 13.6R24		•		•		•		•
14.9R38 / 12.4R28				•		•		•
16.9R34 / 13.6R24		•		•		•		•

Sample Equipment	A65	A75	A85	A95
Engine				
Ejector type inlet air filter			■	■
Silencer under hood			■	■
Electric stop			■	■
Control stop		■	■	■
Battery alternator		■	■	■
Cab				
Tinted glass	■	■	■	■
Front opening windshield	■	■	■	■
Sun visor	■	■	■	■
Cabin light when opening the door	■	■	■	■
Adjustable steering wheel	■	■	■	■
Radio	■	■	■	■
Cab heater	■	■	■	■
Roof mounted heater unit	■	■	■	■
Extra heater	■	■	■	■
Air conditioning	■	■	■	■
Infoline dash display	■	■	■	■
Agroline dash display (4 WD)	■	■	■	■
Passenger seat	■	■	■	■
Safety belt	■	■	■	■
Air suspended driver's seat	■	■	■	■
Rear window wiper + washer	■	■	■	■
Lights				
Rear working lights (2)	■	■	■	■
Front working lights (2)	■	■	■	■
Roof mounted headlights	■	■	■	■
Rotating warning light, yellow/blue	■	■	■	■

Colour Options

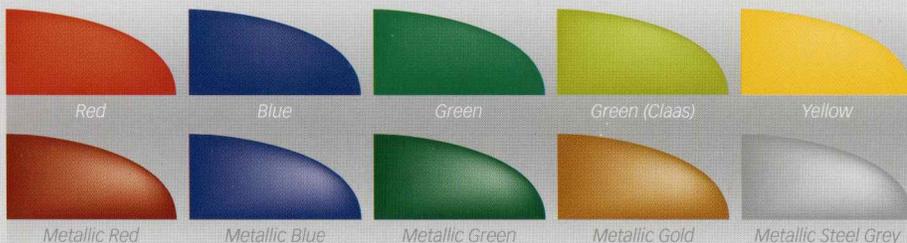


Front linkage and PTO increase the number of work applications.



Roof mounted ventilation heater unit and also air conditioning are available as an option.

There are several radio options.

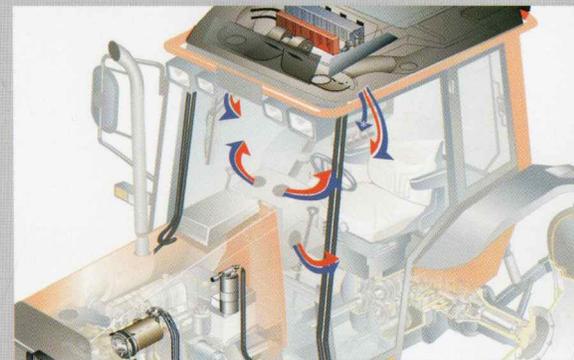

Air conditioning is optional.

Specifications may vary according to chosen options and market area. We reserve the right to alter the specifications and equipment without notification. For further information, please contact your local dealer. Please note! There will be some optional extras added to the tractors in the pictures in this brochure.

Valtra Canada Inc.
278 Main Street North, Suite 6
Uxbridge, ON L9P 1X4
Telephone: (905) 852-0293
Fax: (905) 852-6821
www.valtra.ca

Valtra Service

At Valtra we take care of both people and their machines. Our service team will provide you with everything you need to make servicing your tractor easy, quick and convenient. With everything made so trouble-free, you can concentrate fully on your work. Meanwhile, your tractor will continue working reliably as a genuine Valtra with a high resale value.

