


# APACHE<sup>TM</sup>

***Take a Ride***

***to a World  
of Productivity.***

**ET** Equipment  
Technologies

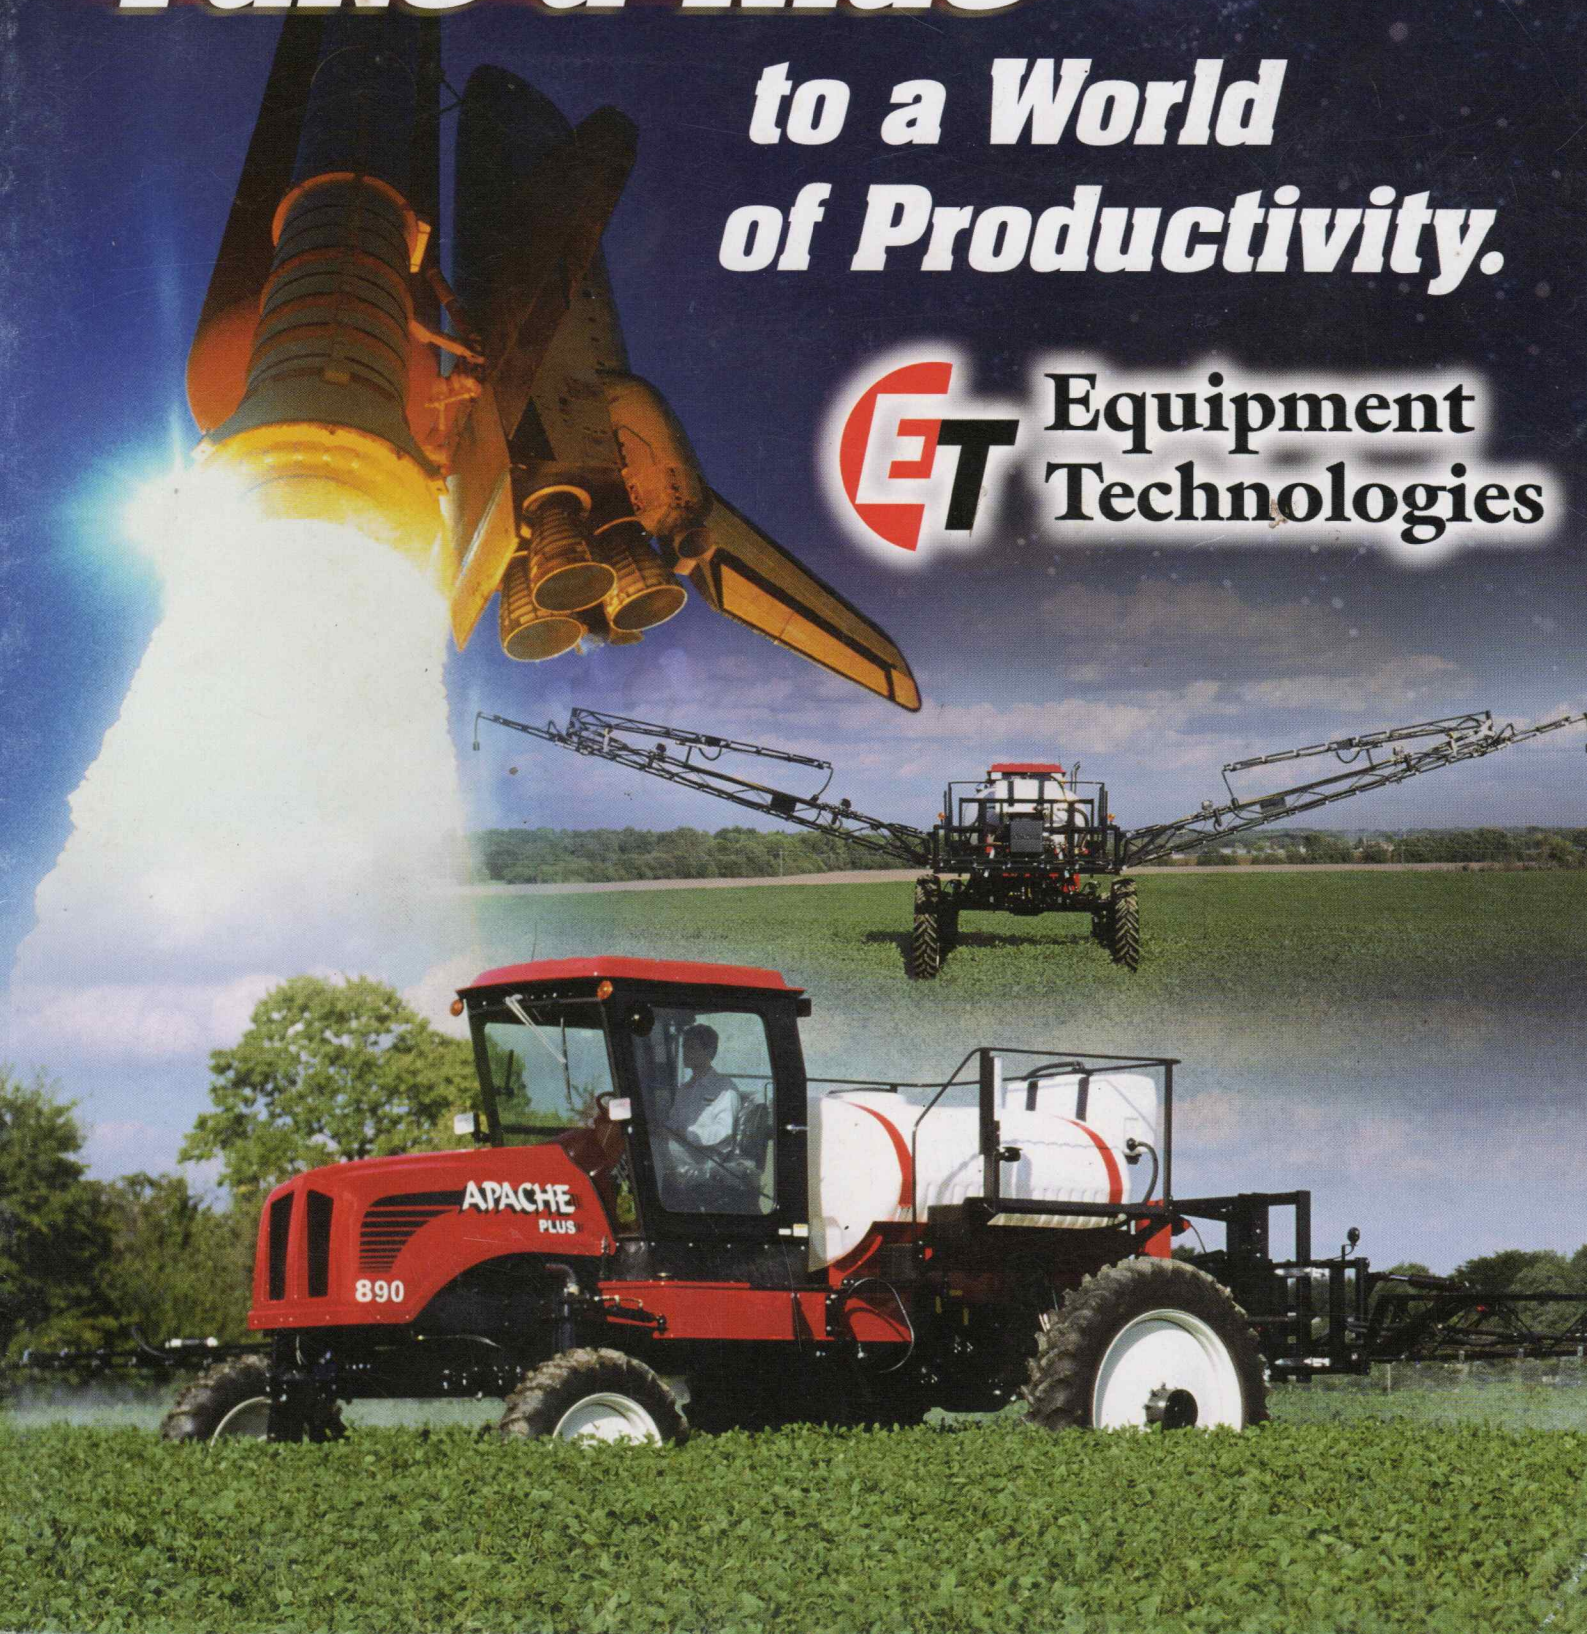

# The Dependability of Mechanical Drive.

# APACHE... High Capacity

Equipment Technologies, Inc. is the largest manufacturer of mechanical drive, high clearance, high volume sprayers in the industry for a good reason... productivity. We understand that sprayer downtime hurts your profitability, and it cannot be tolerated. You

need a dependable sprayer that offers good power, high capacity, a wide boom selection and all the comforts that make operation easier. Let us prove to you how a **mechanical drive** sprayer can **lower** your **maintenance costs** and boost the number of acres worked per season.




## APACHE 700 Series

- 750-gallon tank
- 170-hp John Deere engine
- 4-speed power shift transmission
- Large 46" rear tires keep soil compaction at a minimum
- John Deere deluxe pressurized sprayer cab

- Tight turning radius
- Axle widths from 72" to 90" fixed and 120"-144" adjustable
- Boom widths from 60' to 100'
- Patented hydraulic suspension

## APACHE PLUS 800 Series

- 850-gallon tank
- 200-hp Cummins engine
- 6-speed power shift transmission
- Large 46" rear tires keep soil compaction at a minimum
- John Deere deluxe pressurized sprayer cab

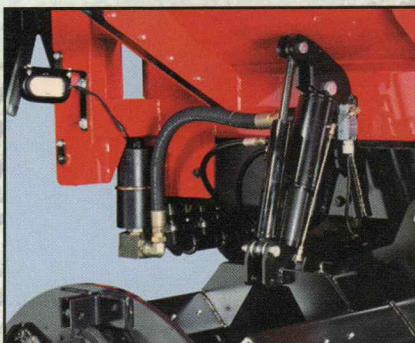

Patented hydraulic suspension provides an ultra smooth ride, built-in anti-sway and automatic self-leveling.



Excellent row crop visibility, 6-way air ride seat and ergonomically positioned controls.



Parallel linkage effectively raises and lowers boom

# The Smooth Ride of Hydraulic Suspension. High Clearance Sprayers

Find out why more growers and custom applicators are enjoying a faster return on their investment through dependable performance, better productivity in the field and a more affordable price. Get an APACHE from ET. There are three series available: the 750-gallon

APACHE 700 series, the 850-gallon APACHE PLUS 800 series, and the 1,200-gallon APACHE PLUS 1200 series. Choose the model and options that fit your applications and budget, and you'll soon experience the best value in high clearance sprayers.




## APACHE PLUS 1200 Series

- Tight turning radius
- Axle widths from 72" to 90" fixed and 120"-144" adjustable
- Boom widths from 60' to 100'
- Patented hydraulic suspension

- 1,200-gallon stainless steel tank
- Large 3" fill and suction to product pump
- 275-hp Cummins engine
- 6-speed power shift transmission
- Large 46" rear tires and 38" front tires keep soil compaction at a minimum

- John Deere deluxe pressurized sprayer cab
- Tight turning radius
- 120"-144" adjustable axles
- Boom widths from 60' to 100'
- Patented hydraulic suspension

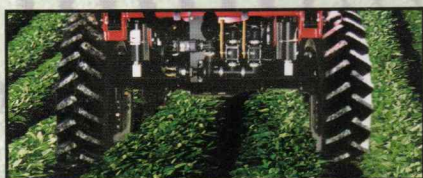

72" - 90" narrow axle



120" - 144" adjustable wide axle slider



Gear drop box, 48" crop clearance



Full Forward      Neutral      Full Reverse

### Patented Apache Throttle & Directional Control

- Select forward or reverse slot with orange "T" handle
- Move orange "T" handle forward to increase engine rpm & ground speed
- Move back to decrease speed
- Center "T" handle for neutral

# APACHE SPECIFICATIONS



ITEM	MODEL		
	700 Series	800 Series	1200 Series
<b>Tank Capacity</b>	750-gallon	850-gallon	1,200-gallon: stainless steel
<b>Engine</b>	170-hp John Deere 6-cylinder	200-hp Cummins 6-cylinder	275-hp Cummins 6-cylinder
<b>Transmission</b>	JCB 4-speed power shift with torque converter and hydraulic shuttle shift	Funk 6-speed power shift with torque converter and hydraulic shuttle shift	Funk 6-speed power shift with torque converter and hydraulic shuttle shift
<b>Suspension</b>	Patented hydraulic with compensating anti-sway control	Patented hydraulic with compensating anti-sway control	Patented hydraulic with compensating anti-sway control
<b>Brakes</b>	Internal, wet	Internal, wet	Internal, wet
<b>Speeds</b>	1st 0-5, 2nd 0-9, 3rd 0-16, 4th 0-28	1st 0-6, 2nd 0-9, 3rd 0-11, 4th 0-15, 5th 0-22, 6th 0-35	1st 0-6, 2nd 0-9, 3rd 0-11, 4th 0-15, 5th 0-22, 6th 0-35
<b>Final Drive</b>	all gear drop boxes	all gear drop boxes	all gear drop boxes
<b>Axle</b>	72" - 90" manually adjust or 120" - 144" manually adjust with optional on-the-go hydraulic adjust	72" - 90" manually adjust or 120" - 144" manually adjust with optional on-the-go hydraulic adjust	120" - 144" manually adjust with optional on-the-go hydraulic adjust
<b>Cab</b>	John Deere Deluxe pressurized cab	John Deere Deluxe pressurized cab	John Deere Deluxe pressurized cab
<b>Weight</b>	16,200 lbs.	17,800 lbs.	20,600 lbs.
<b>Width</b>	122" with 72" - 90" axle 135" with 120" - 144" axle	122" with 72" - 90" axle 135" with 120" - 144" axle	135" with 120" - 144" axle
<b>Length</b>	23'	23'	23'
<b>Booms Height Range</b>	60', 75', 80', 90', 100', 60/80', 60/90' Min. 17" to 92" Max.	60', 75', 80', 90', 100', 60/80', 60/90' Min. 17" to 92" Max.	60', 75', 80', 90', 100', 60/80', 60/90' Min. 17" to 92" Max.
<b>Wheelbase</b>	14'	14'	14'
<b>Turning Radius</b>	14'7"	14'7"	14'7"
<b>Fuel Tank</b>	90-gallon	90-gallon	90-gallon
<b>Crop Clearance</b>	48"	48"	48"



**Equipment Technologies, Inc.**

**Call 317-834-4500**

**Fax 317-834-4501**

2201 Hancel Parkway • Mooresville, IN 46158

[www.apachesprayer.com](http://www.apachesprayer.com)

AVAILABLE AT: