


QUENTIN CURRIE

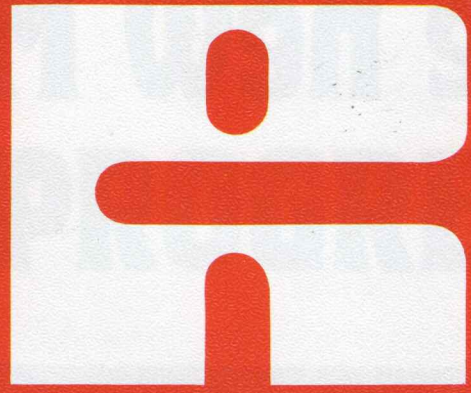


Type 115/131/112

**REFORM  
MOWER**


# The new Mower Generation continual

REFORM motor mowers with the convincing advantages in the detail

- steering bars, mounted on rubber and height adjustable permit nontiring, easy mowing even on steep slopes.
- completely encapsulated mower-drive operating in an oilbath, with newly developed knife head giving largely noise-free operation and long life.
- excellent slope-ability in any terrain.
- optimum arrangement of operating levers directly within hand range.
- clean, exact mowing quality with high mowing yield.
- easy-to-maintain construction and solid execution.
- may be combined with front band endless rake and snow plough.

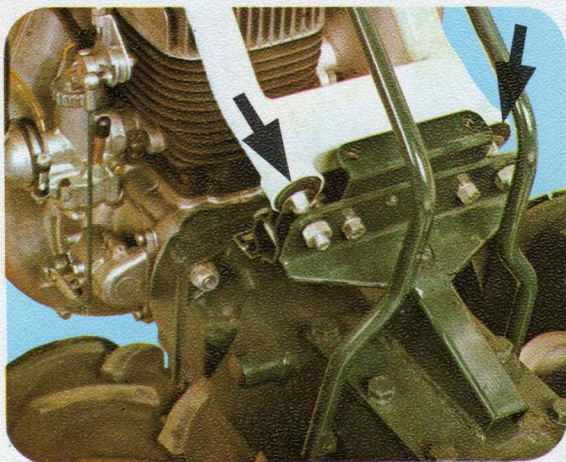

central bar, rubber-mounted

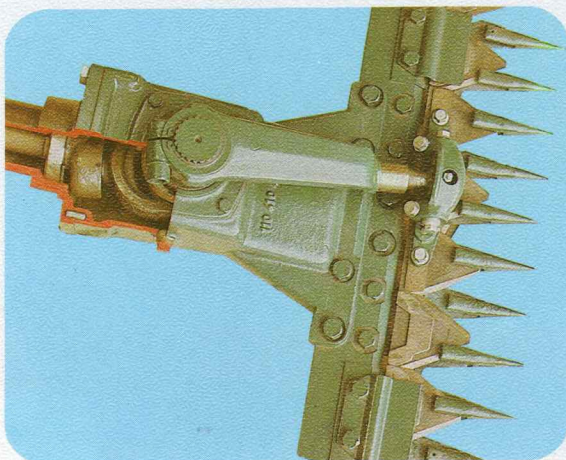

wear-resistant oilbath-mower drive with new, easy-to-maintain knife head




# ion by REFORM ly adapted to PROGRESS

**REFORM has the right kind of mower for every kind of operation**

REFORM 115: best sales of all Austrian mowers. Sensational efficiency and price. Perfect technical equipment. The ideal mower for typical mountain farms. With one lever-switch each you can switch forward and reverse gears and a p. t. o. — shaft for the mower drive. The steering bars may be adjusted in height, allowing you to handle your REFORM mower with absolute safety. This is an advantage of all REFORM mowers, as well as their combinability with endless rakes and snowmoving shield.

REFORM 131/112: the multi-gear mowers REFORM 131/112 with 3 forward gears and 1 reverse gear satisfy even higher requirements. The REFORM 112 possesses a differential gear with lock, which has given stalwart proof of itself in communal enterprises and under extremely difficult conditions.

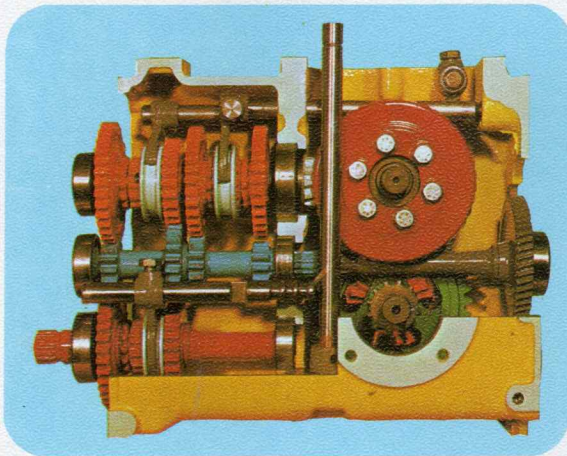


Type 112 with differential with lock

See for yourself: gear box, wheels and shafts of case-hardened steel — all bearings are ball or needle bearings — perfect in every detail.  
REFORM 115: 1 forward, 1 reverse gear  
REFORM 131/112: 3 forward, 1 reverse gear (differential with lock additional for type 112).

You are looking for versatility? That's what you get. The mower drive is detached in a jiffy from the driving unit with the quick coupling. Equipped with an endless front rake the REFORM mower pays for itself with high yield in fodder harvesting on any kind of slope.

Snow removal at your farm will be a pleasure in winter with the mower.


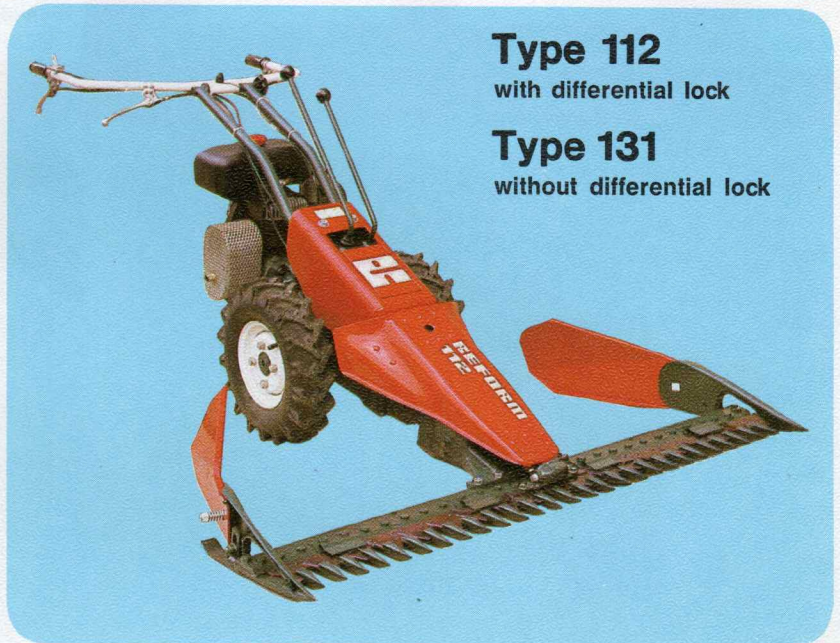


**Type 112**

with differential lock


**Type 131**

without differential lock

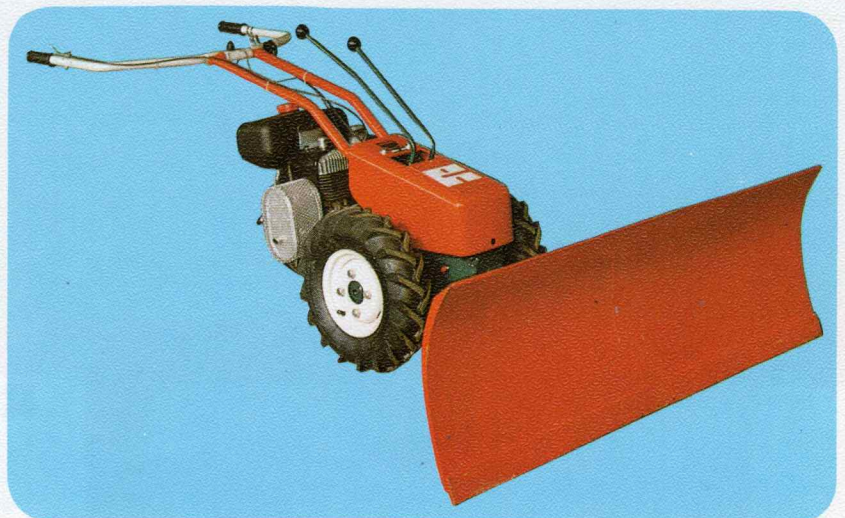
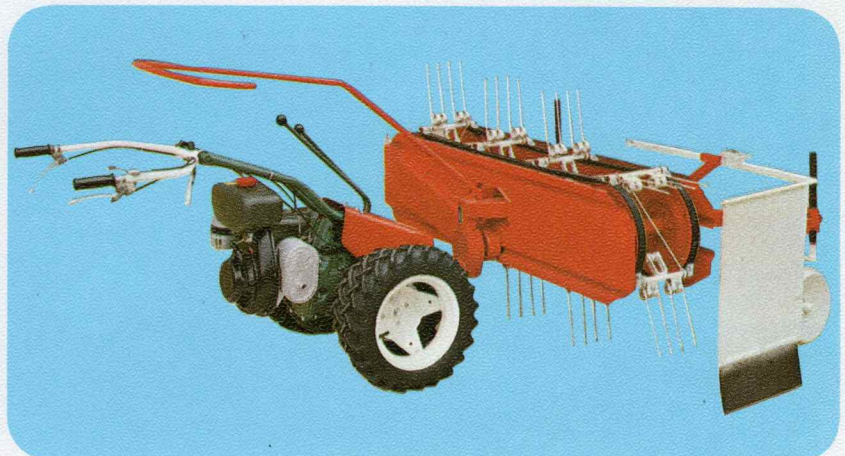


# REFORM MOWER

perfect from the  
handlebars to the mower drive

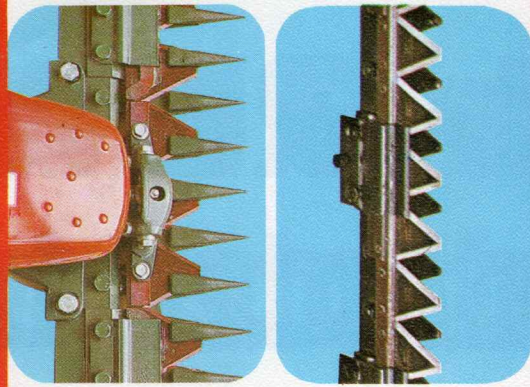

Medium cut (ill. left) bar and mulch bar (ill. right) are available, as well as fine cut- and non-stop bar

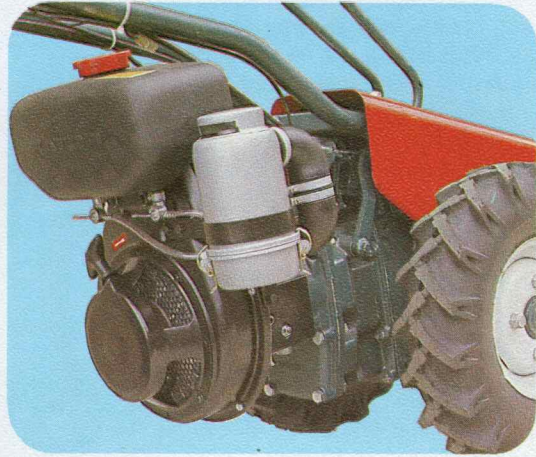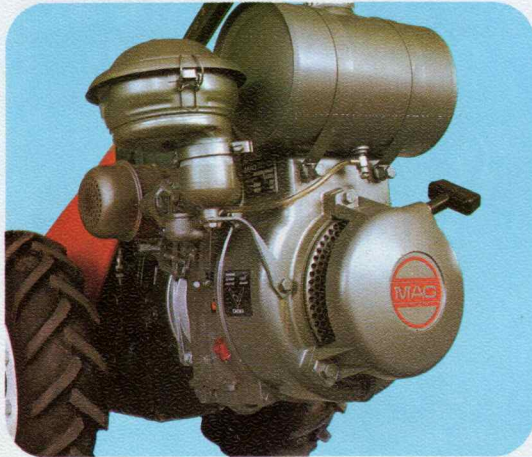

## Technical data: REFORM mower 115, 131, 112

Joint technical data:

Motors: ROTAX 2-stroke, petrol, 232 cm<sup>3</sup>, 5.6 kW  
MAG 4-stroke, petrol, 260 cm<sup>3</sup>, 5.6 kW  
both motors fitted with recoil starter, governor, oilbath air filter  
(Rotax) or dry filter with replaceable cartridge (MAG)

Serial equipment: rubber wheels 4.00-8 (with closed profile where required) or sheetmetal wheels;  
medium cut cutter bar 145 cm, steel normal or mountain fingers.

Motor mower type	REFORM 115	REFORM 131	REFORM 112
Steering forks	rubber-mounted, height-adjustable		
Wheel axle	rigid, continuous axle	rigid semi-axle	semi-axle, differential with lock
Mowing gears	for forward, reverse gear and switchable in neutral	for 1st and 2nd forward, reverse and switchable in neutral	
Driving gears	1 forward, 1 reverse gear	3 forward gears, 1 reverse gear	
Driving speeds with tires 4.00-8 and motor revs 3600 rpm	forward gear: 4.0 km/h reverse gear: 4.0 km/h	1st gear: 2.2 km/h 2nd gear: 3.8 km/h 3rd gear: 7.1 km/h reverse gear: 2.6 km/h	
Hand holding brake	on request	on request	serially internal expanding brake: actuation by means of fixing hand brake lever
Oilbath mower drive	quick coupling allows removal without tools (e.g. combined with front endless rake)		
Weights (with mower bar 145 cm)	160 kg	166 kg	168 kg

### Additional equipment:

Wheels: additional spade wheels next to rubber wheels 4.00-8 (with snap-lock), twin- or triple wheels next to rubber wheels 4.00-8 (screwed).

Mower bars: 160 cm medium cut, steel normal or mountain finger bars;  
145 cm fine cut bar; 160 cm fine cut bar;  
145 cm non-stop bar; 160 cm non-stop bar;  
137 cm mulch bar; 168 cm mulch bar;  
137 cm communal bar; 168 cm communal bar;  
mower bar protection 145 cm and 160 cms.

Accessory devices: for 112/131: endless band rake, working width 160 cm, weight 162 kg, additionally recommended: accessory wheels rubber 4.00-12 (where required with screw-on additional spade wheels), snow plough shield, working width 140 cm, weight 50 kg.

## REFORMWERKE

Bauer & Co. Ges.m.b.H.

**A-4600 WELS, AUSTRIA**

P. O. Box 192, Phone (072 42) 7377227

Telex 025-539