

HOLDER



**The new generation
Still more power and
more comfort**

Narrow-track Four-wheel Drive Tractors

Cultitrac A40/A50



Holder-Cultitrac A40/50: an investment in quality and versatility

The new Cultitrac A 40 and A 50 incorporate anything expected from modern tractor technology. For you, to do your work easier, faster, and better.

Implements:


- Rotary hoe
- Cultivator
- Sprayers
- Foliage cutter
- Uncovering plough
- Mounted spreaders
- Front-mounted loader
- Rear-mounted mower
- Spindle-mower
- Sand/gravel distributor
- Earth blade

Versatility is combined with the proverbial Holder long lasting quality. Holder tractors are produced with great care and thoroughly examined before leaving the factory. Therefore, if you choose a Holder tractor, you are sure to get your money's worth in the course of its service life.



**The new Holder Cultitrac
generation:
Narrow-track
A40, A50 and - the A60**

Technical data	Cultitrac A 40	Cultitrac A 50																				
Design	Block construction, four-wheel drive, articulated steering.																					
Engine	Holder 2-cylinder four-stroke diesel engine, 1571 cc, 24 kW, 37 HP at 2500 rpm. Bosch fuel injection system and regulator, direct fuel injection, vibration-free running, excellent acceleration, ideal torque characteristic, forced-feed lubrication, crankshaft on triple bearings.	Holder 3-cylinder four-stroke diesel engine, 2356 cc, 36,5 kW, 56 HP at 2500 rpm. Bosch fuel injection system and regulator, direct fuel injection, vibration-free running, excellent acceleration, ideal torque characteristic, forced-feed lubrication, crankshaft on 4 bearings.																				
Clutch	Driving clutch: Single-plate dry clutch, hydraulically controlled w. automatic resetting. Independent P.T.O.: multi-plate clutch.																					
Gearbox	Synchronized with 8 forward and 4 reverse gears. Creep speed 0,6 km/h upon request. Hydraulically operated diff-lock front and rear.																					
Steering	Hydrostatic steering, articulated.																					
Brakes	Driving and parking brake acting on all 4 wheels.																					
Tyres	<table border="1"> <thead> <tr> <th rowspan="2">Size</th> <th colspan="2">Track</th> </tr> <tr> <th>Narrow</th> <th>Wide</th> </tr> </thead> <tbody> <tr> <td>7.50-18 AS</td> <td>701</td> <td>941</td> </tr> <tr> <td>7.50-18 (Golf)</td> <td>701</td> <td>941</td> </tr> <tr> <td>28 x 9.00-15 (Lawn)</td> <td>722</td> <td>918</td> </tr> <tr> <td>10.5/80-18</td> <td>814</td> <td>(1014)*</td> </tr> <tr> <td>400-15.5 Trelleborg (Floatation) *with hub spacers</td> <td>--</td> <td>904</td> </tr> </tbody> </table>		Size	Track		Narrow	Wide	7.50-18 AS	701	941	7.50-18 (Golf)	701	941	28 x 9.00-15 (Lawn)	722	918	10.5/80-18	814	(1014)*	400-15.5 Trelleborg (Floatation) *with hub spacers	--	904
Size	Track																					
	Narrow	Wide																				
7.50-18 AS	701	941																				
7.50-18 (Golf)	701	941																				
28 x 9.00-15 (Lawn)	722	918																				
10.5/80-18	814	(1014)*																				
400-15.5 Trelleborg (Floatation) *with hub spacers	--	904																				
P.T.O.	<table border="1"> <tbody> <tr> <td>4100-1 Gear depending P.T.O. rear 540 rpm at 2200 rpm engine speed</td> <td>4100-4</td> </tr> <tr> <td>4100-2 Motor depending P.T.O., shifting under load, rear 540 rpm at 2200 rpm engine speed, front 1000 rpm at 2360 engine speed</td> <td>4100-5</td> </tr> </tbody> </table>		4100-1 Gear depending P.T.O. rear 540 rpm at 2200 rpm engine speed	4100-4	4100-2 Motor depending P.T.O., shifting under load, rear 540 rpm at 2200 rpm engine speed, front 1000 rpm at 2360 engine speed	4100-5																
4100-1 Gear depending P.T.O. rear 540 rpm at 2200 rpm engine speed	4100-4																					
4100-2 Motor depending P.T.O., shifting under load, rear 540 rpm at 2200 rpm engine speed, front 1000 rpm at 2360 engine speed	4100-5																					
Fuel tank	Capacity 40 litres with fuel supply indicator and large micronic fuel filter in tank.																					
Air filter	Dry air filter with accoustical warning system when clogged.																					
Cooling system	Water cooling with pump and thermostat.																					
Driver seat	Spring loaded "Bostrom" seat, adjustable vertically, horizontally, and for driver's weight.																					
Trailer hitch	Non-automatic trailer hitch, for operation with one hand, adjustable for height.																					
Hydraulics	Holder single-acting rear hydraulics, two-cylinder upon request.	Holder two-cylinder rear hydraulics.																				
Lifting capacity	<table border="1"> <tbody> <tr> <td>Cat. 0 10 000 N (1000 kg)</td> <td>Cat. 0 20 000 N (2000 kg)</td> </tr> <tr> <td>Cat. I 9 000 N (900 kg)</td> <td>Cat. I 18 000 N (1800 kg)</td> </tr> </tbody> </table>	Cat. 0 10 000 N (1000 kg)	Cat. 0 20 000 N (2000 kg)	Cat. I 9 000 N (900 kg)	Cat. I 18 000 N (1800 kg)	<table border="1"> <tbody> <tr> <td>Cat. 0 20 000 N (2000 kg)</td> <td>Cat. I 18 000 N (1800 kg)</td> </tr> </tbody> </table>	Cat. 0 20 000 N (2000 kg)	Cat. I 18 000 N (1800 kg)														
Cat. 0 10 000 N (1000 kg)	Cat. 0 20 000 N (2000 kg)																					
Cat. I 9 000 N (900 kg)	Cat. I 18 000 N (1800 kg)																					
Cat. 0 20 000 N (2000 kg)	Cat. I 18 000 N (1800 kg)																					
	Operating pressure 190 bar																					
	Capacity 14 cc/35 l/min., optionally 40 l/min.																					
Implement lift	Optionally Cat. 0 with vertical lift, or standard 3-point Cat. I																					
Electrical system	Three-phase generator, 12 V, 33 Amp.																					
Tractormeter	Registering ground speed for the various gears, with speedometer for engine and P.T.O., and with hour meter.																					
Permissible total weight	2700 kg																					
Permissible axle loads	front and rear 1500 kg each																					
Wheel base	1450 mm																					
Adjustable track width	701/941																					
Overall width	910/1309																					
Overall length incl. 3 point	3060	3194																				
Overall height incl. rollover bar	1952-2047																					
Dead Weight	1375 kg (7.50-18)	1510 kg (10,5-18)																				

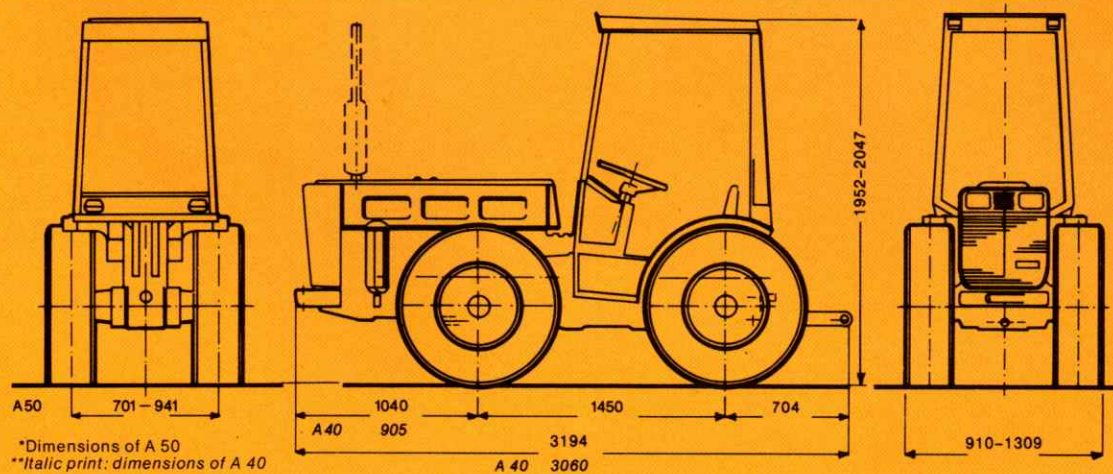

Manufacturers:
Gebr. HOLDER GmbH & Co
Maschinenfabrik
D 7430 METZINGEN
Postfach 1555
West Germany
Telex: 7245319
Phone: (07123) 166-0

Information · Sales · Service

Information A 40/A 50

Imprimé en Allemagne
 Printed in Germany

Technical data non-obligatory

0783 Läufer