


CARTED HAY RAKES
RTJ







CARTED HAY RAKES RTJ



Center kicker wheel (optional)

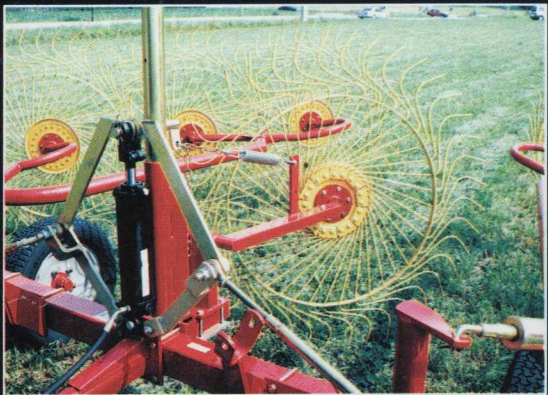

Hydraulic lift linkage assembly

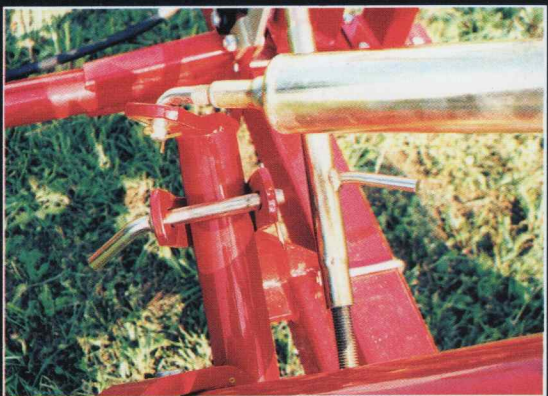

Locking pin for transport



Shock absorbing floating spring and adjusting turnbuckle

Carted Hay Rake RTJ SERIES





The carted hay rake RTJ series have two single rake main frames which have been coupled with a folding mechanism that allows to operate the rake directly from the tractor. High quality materials ensure a long lasting life with very low maintenance. The two rake main frames pivot and slide on the trolley frame giving the possibility of setting the rake working width at your convenience, maintaining the optimum inclination with respect to the crop you are raking. The turnbuckles allow you to vary the frames inclination according to the quantity and type of crop you are raking. The locking pin allows one side raking option if desired. The wide frame of the trolley with two ground wheels permits the maximum stability of the rake even in rough and uneven terrain. A shock absorbing floating spring, one for each rake, relieves the ground pressure on the finger wheels. The tines' shape and the special steel used in manufacturing have been studied to give the best flexibility. This design allows for a gentle contact with the forage avoiding any soil contamination. The final result is a fluffy and clean windrow suitable to form an even and compact bale. It is available (as an optional) a hydraulic center kicker wheel that will turn the windrow by half a turn also moving the crop in the center. This will allow to form a better and fluffier windrow obtaining in this way a perfect bale.









CARTED HAY RAKES RTJ

7mm Dia
T0-1000876
4-70 + GST

MODEL							
		NUMBER	kW	HP	LBS	KG	FEET
RTJ 8	8	14.9	20	1038	472	10'	300
RTJ 10	10	14.9	20	1174	534	10'4"	320
RTJ 12	12	18.6	25	1386	630	11'4"	340

MODEL							
	MPH	KMH		INC	CM	FEET	CM
RTJ 8	14	22	175/70-14	55"	140	19'8"	590
RTJ 10	14	22	175/70-14	55"	140	22'	660
RTJ 12	14	22	175/70-14	55"	140	24'4"	730

Patent number 5.493.853 - 5.062.260 -
5.493.853 - 5.752.375 - 2.038.267
Other patents pending



Head office

Via Udine, 16
33047 Remanzacco (Italy)
Phone ++39 0432 667015
Fax ++39 0432 668282

Factories:

Remanzacco (UD)
Rivignano (UD)
Vezzano (RE)

U.S. Warehouse:

S&T Manufacturing Co.
1909 Thomas Road
Memphis TN 38134
Phone (901) 385 8841
Fax (901) 385 8288

RUSSIA Warehouse:

G.M.T. Limited
3 Tekhnicheskaja Street
PERM 614070 RUSSIA
Phone 007 (3422) 90 90 96
Fax 007 (3422) 90 90 96

TONUTTI reserves the right to make changes or add improvements at any time without notice. The information contained herein is general in nature and is not intended for specific application purposes.



e-mail: tonutti@tonutti.it
web site: www.tonutti.it

