

AKTIV

TH

Swedish quality — for a lifetime's service

For almost 100 years AB Westeråsmaskiner has manufactured agricultural machinery . . . keeping pace with the advancing needs of world farming. Since 1875, when the first mower left the factory, hundreds of thousands of AKTIV mowers have been chosen and used by farmers in Europe, Canada, Australia and Africa. In fact, throughout the world the AKTIV has demonstrated Sweden's quality and craftsmanship in a machine that embodies all that you, as a farmer, has the right to expect . . . exemplary performance and utmost reliability.


Cutter bar of highest quality steel with drop forged heavy duty fingers, ensures the longest life with the absolute minimum of replacements.

THE MOWER WITH A HISTORY OF SUCCESS

AKTIV TH Fully mounted 3-point link

AKTIV TH fits all popular tractors fitted with hydraulic three-point linkage. It is easy to handle and can be mounted or dismounted in a matter of minutes.


NOTE THESE SPECIAL FEATURES . . . The *AKTIV TH* is provided with needle bearings or ball bearings for all moving shafts. It has a cradle-suspended knife, with knife and pitman moving in opposite directions, which, together with perfectly balanced pulleys, result in quite and vibration free cutting. The pitman is also of overhead design, giving high ground clearance and avoiding all risk of damage from impact. The knife movement is transferred from the pitman via a swing arm on a needle bearing, thus giving the cutter bar a large working area in relation to ground level. The cutter bar is adequately protected from damage in contact with obstacles, by means of an overload release mechanism which causes the arm to swing back, out of harm's way.

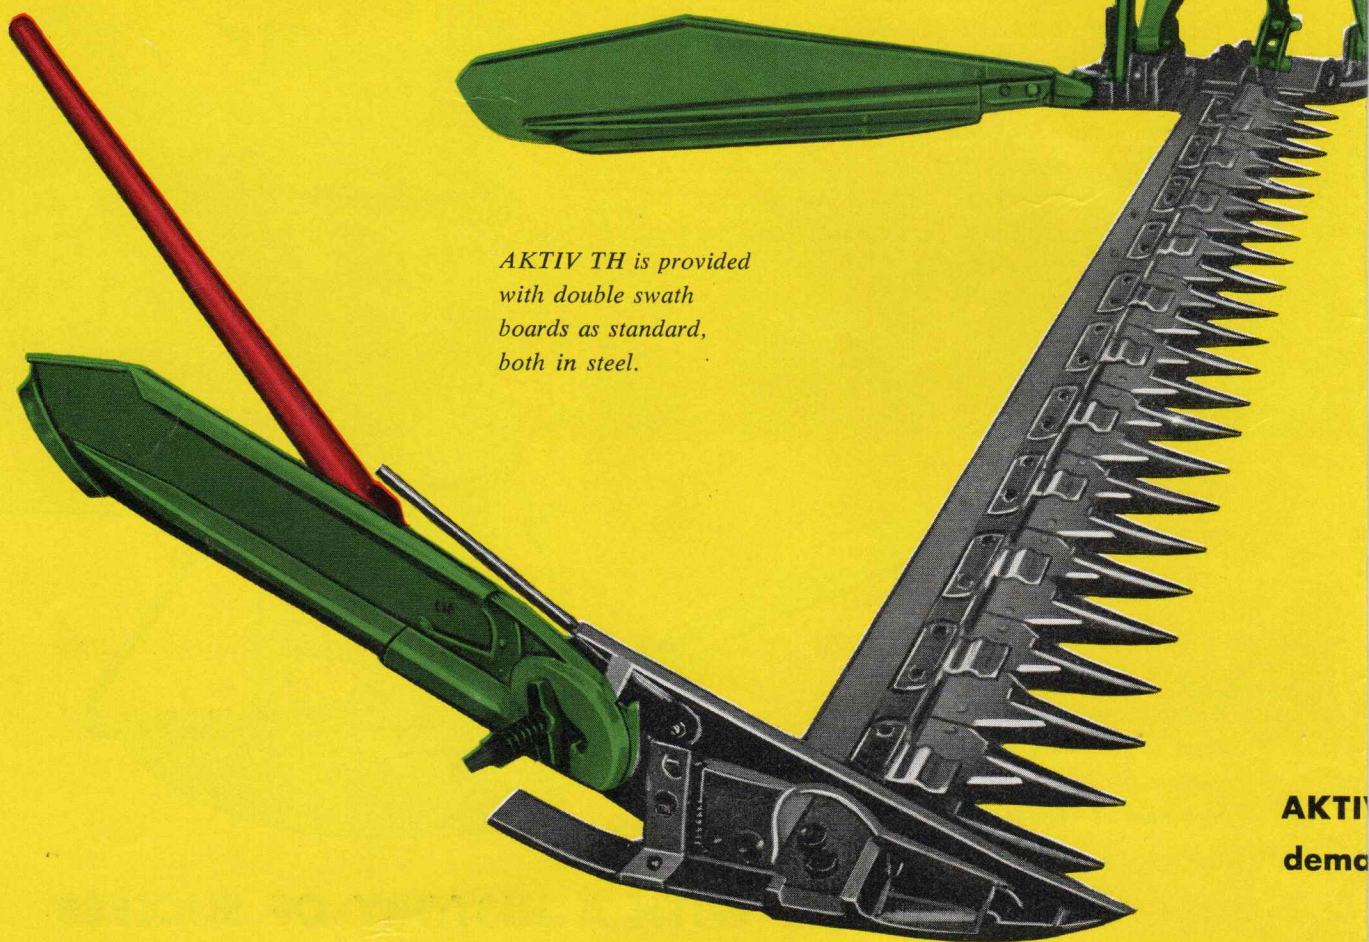

AKTIV TH is provided with double swath boards as standard, both in steel.


AKTIV
demo

Package mower

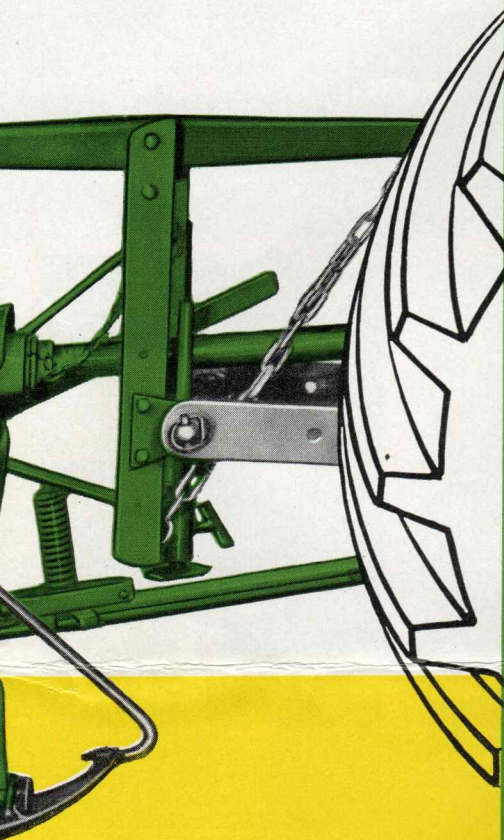


AKTIV TH is very easy to attach and detach. The p.t.o. shaft is permanently enclosed in a telescoping tube safety shield.


AKTIV TH — for the farmer who demands exceptional capacity and absolute reliability.

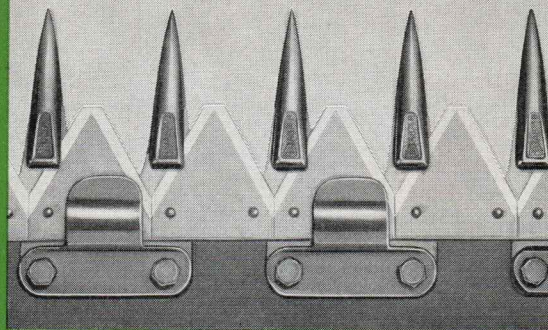


Precision made cutter-bar, with every part fashioned by skilled specialists. Knife clips for each pair of section ensures tight contact between section and ledger plate, thus making a cut as perfect as a pair of scissors.

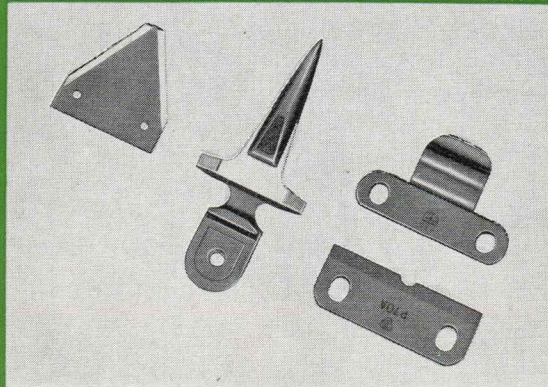


Plain ledger plates, drop forged fingers... knife clips for each pair of sections... all in special Swedish steel... are features that contribute to troublefree working, even under the most severe conditions.

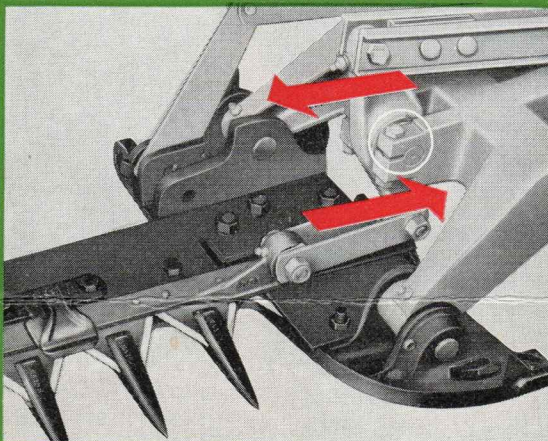

Complete freedom from vibration is a notable asset of the TH. The knife and pitman are balanced and their movement counter-working.

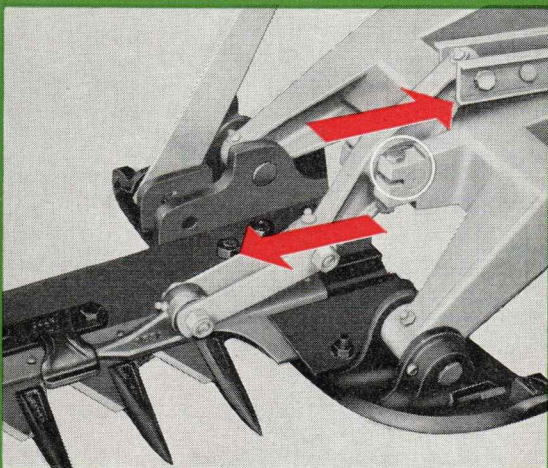

The over-load release has a large release sector, thus allowing sufficient time to stop the tractor and avoid damage to the mower.

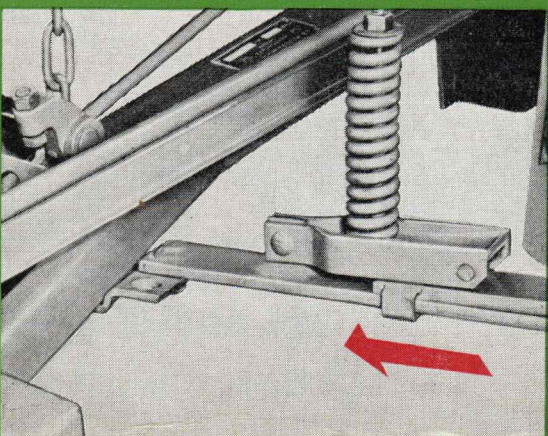

The elevated position of the pitman gives ample ground clearance. It cannot pull and bunch the cut hay or hit the ground or obstacles.

Specification

Working width 5 ft., 6 ft., and 7 ft.
Weight 375 lb., 385 lb., and 395 lb. respectively.

Normal and medium cut.


Walterscheid p.t.o. shaft with swift hitch device.

Knife protector.


Extra equipment: Pea bar and windrow attachment.



Mounting the mower frame to the tractor drawbar. The mower is conveniently positioned on its two supporting legs.

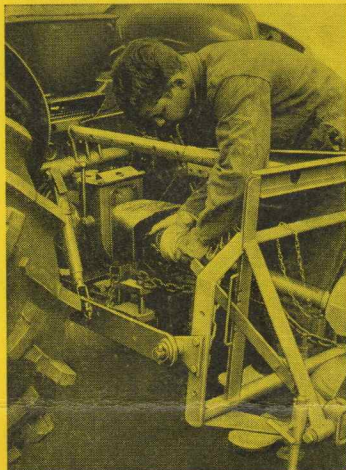


The upper link tube is attached to the tractor.

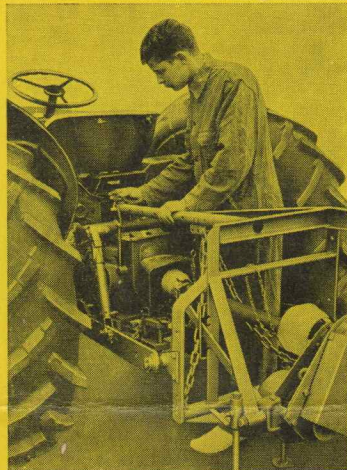


Mounting of the overload release for cutterbar on the drawbar bracket. Locking is simple, fast and safe.




The power transmission shaft is provided with swift hitch device and is easily mounted to the tractor's p.t.o. shaft, without tools.

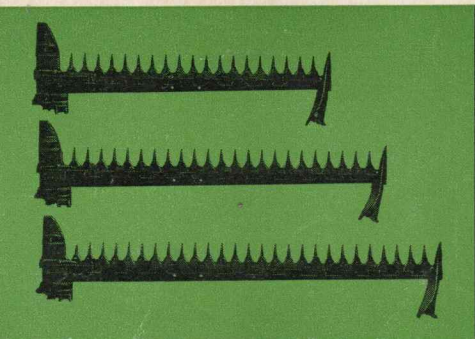

5 ft., 6 ft. or 7 ft. cutter bar available, each for either normal or medium cut.

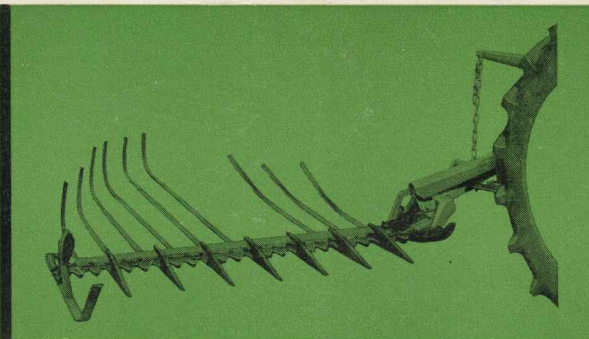

Pea bar with special straw lifter and windrow attachment can be obtained as extra equipment.

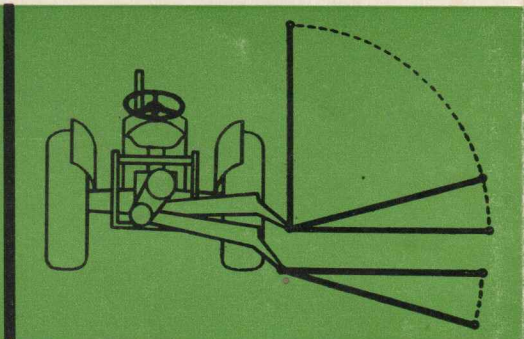

The AKTIV TH has a large working area. The cutter bar can be varied $\pm 15^\circ$ in relation to ground level, so that sloping sides of ditches, highway embankments and similar banks can be efficiently cut. The cutter bar is positioned by means of the tractor's hydraulics. No hydraulic brackets required on the mower.



AB WESTERÅSMASKINER

— MORGONGÅVA — SWEDEN

