


**SAME**

# Saturno

**80**

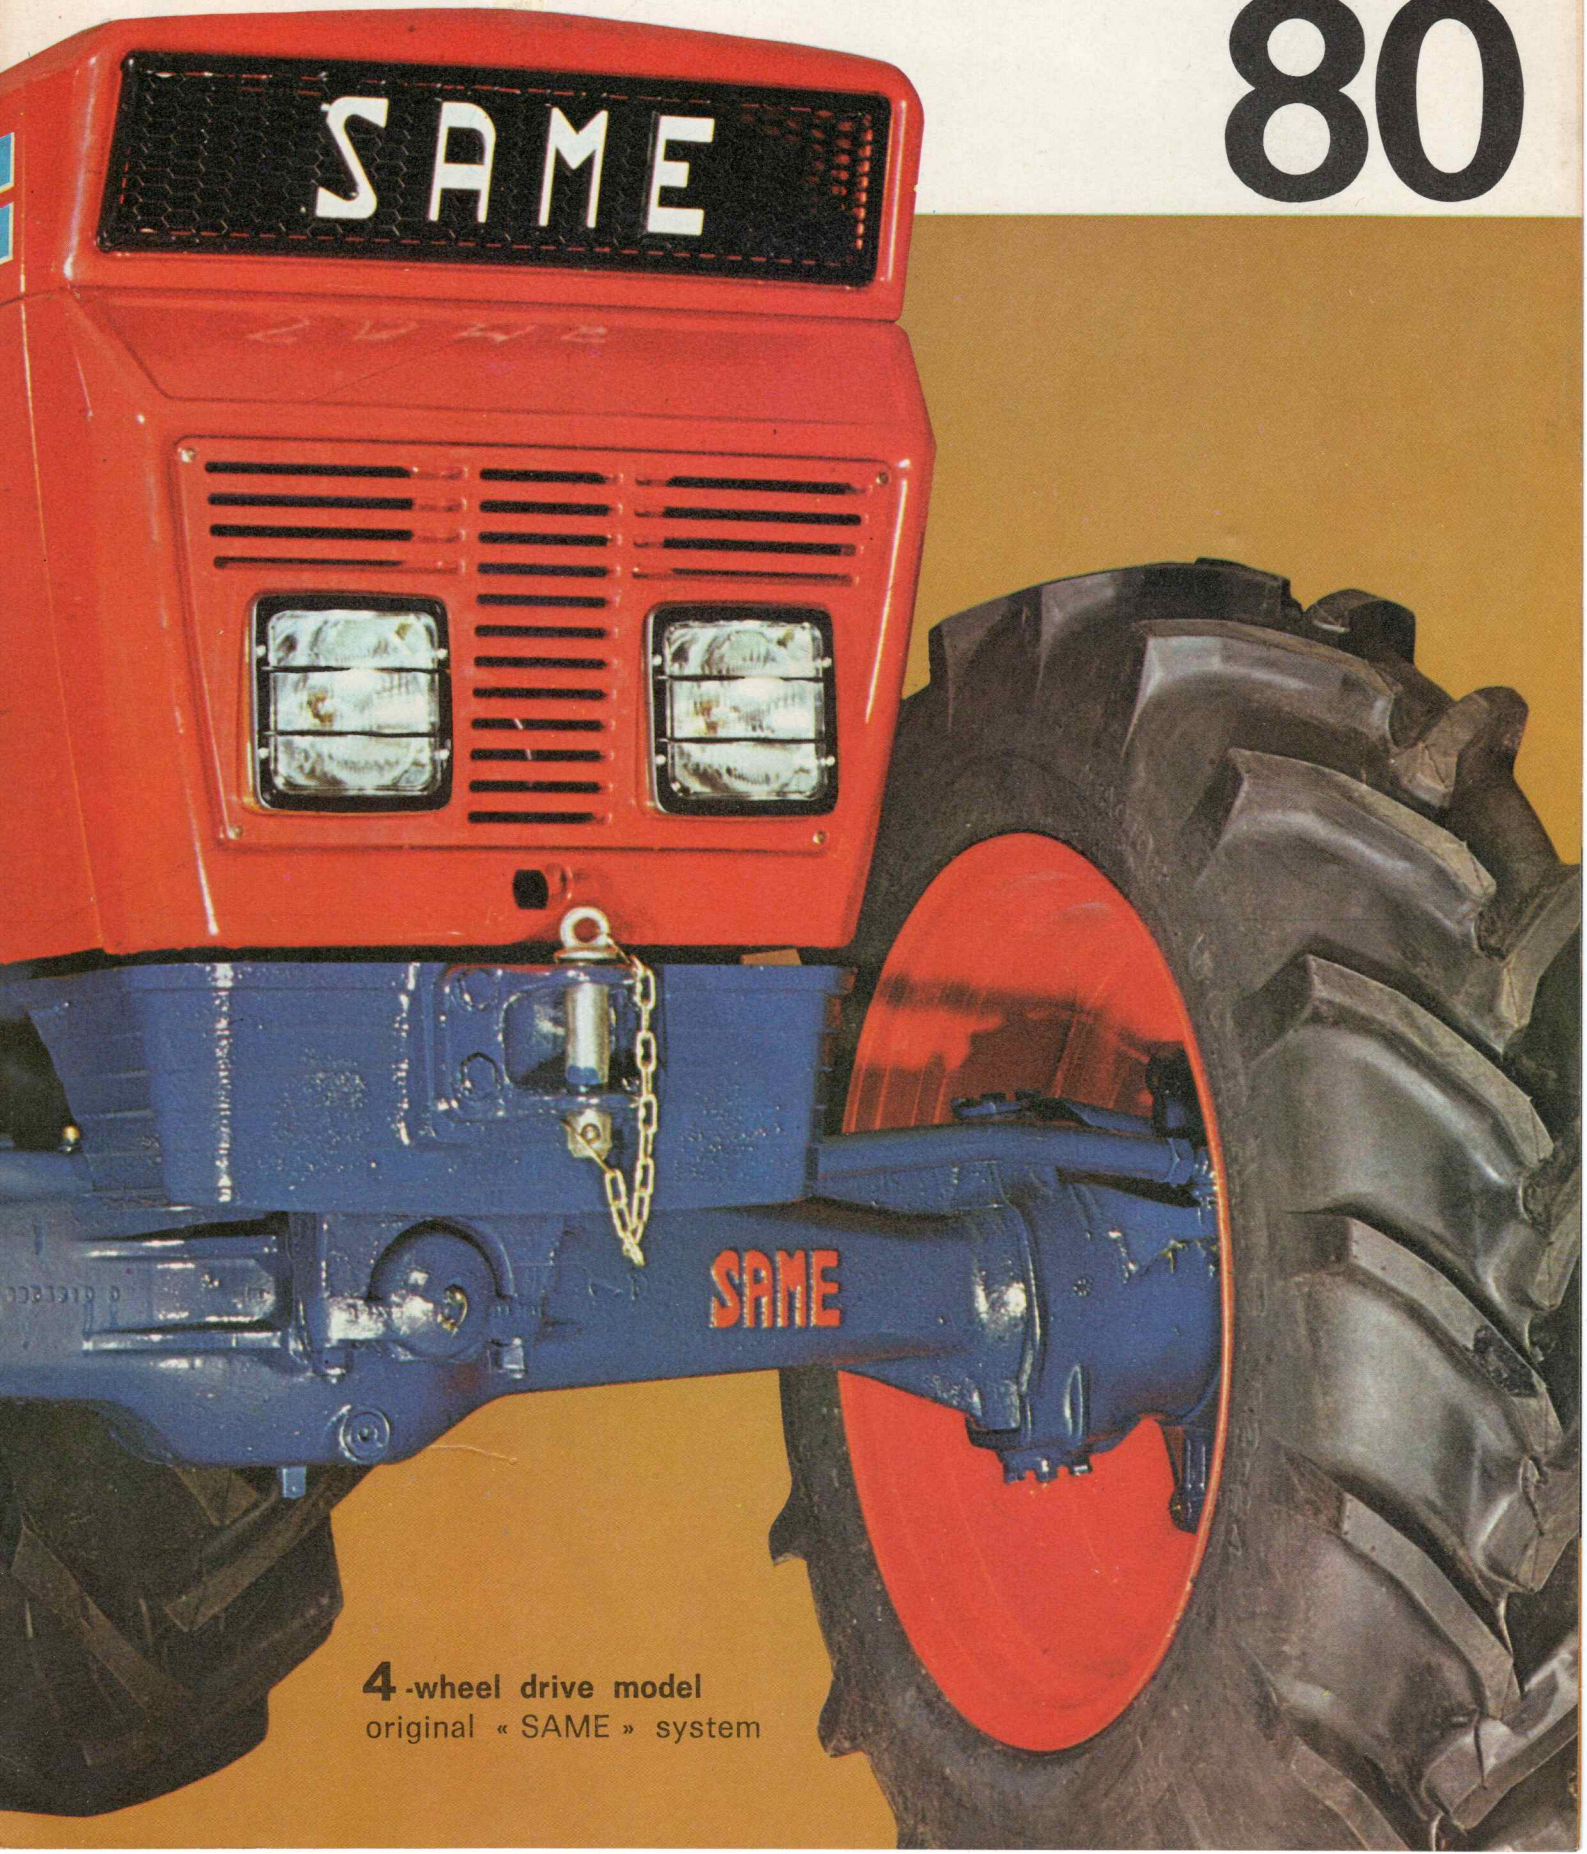

**4**-wheel drive model  
original « SAME » system

The powerful SATURNO tractor is the last word in high power specifically designed for the most modern agricultural implements and machines

- new 4-cylinder in-line engine air-cooling « SAME » tractors do not freeze or boil

- new 12-gear gearbox with mesh-up synchronizer and extra-reduction on request

- speed from 0,18 to 18,6 m.p.h. with rapid gear-change



- particularly low centre of gravity: this means safe transversal and longitudinal stability with no change in ground-clearance

- highly modern « all-power » styling for maximum operator comfort
- powerful « SAME » Automatic Linkage Control Unit
- 4-wheel drive model (original « SAME » system)



2-wheel drive model

# TECHNICAL DATA

## ENGINE

Model SAME 039 - 1054  
 Fuel type Diesel  
 Cycle 4 stroke  
 Injection Direct  
 Number of cylinders 4  
 Cylinder arrangement in line  
 Bore 4.13385 ins (105 mm)  
 Stroke 4.72440 ins (120 mm)  
 Displacement 254 cu. ins (4156 cm<sup>3</sup>)  
 Compression ratio 17 : 1  
 Max. power 78 HP  
 R.p.m. at max. power 2200  
 Cooling Air  
 Lubrication Forced  
 Valves Overhead

## DIMENSIONS

Overall length 142.1 ins (361 cm)  
 Overall width 76.0 ins (193 cm)  
 Overall height 64.6 ins (164 cm)  
 Height to hoodline 55.9 ins (142 cm)  
 Ground clearance 21.7 ins (55 cm)  
 Wheel base 92.5 ins (235 cm)  
 Front wheel-track  
 Minimum 55.9 ins (142 cm)  
 Maximum 83.5 ins (212 cm)  
 Rear wheel-track  
 Minimum 55.1 ins (140 cm)  
 Maximum 78.7 ins (200 cm)  
 Front tyres 7.50-18  
 Rear tyres 16.9/14-34  
 Weight 5645 lbs (2560 Kgs)

## 2-W.D.

## 4-W.D.

146.5 ins (372 cm)  
 76.0 ins (193 cm)  
 65.6 ins (166 cm)  
 56.7 ins (144 cm)  
 17.3 ins (44 cm)  
 92.5 ins (235 cm)  
 56.3 ins (143 cm)  
 —  
 55.1 ins (140 cm)  
 78.7 ins (200 cm)  
 11.2/10-28  
 16.9/14-34  
 6196 lbs (2810 Kgs)

**SPEEDS in m.p.h. (Km.p.h.)**  
 at 2200 r.p.m.  
 with rear tyres 16.9/14-34

1st	0.76	(1.22)
2nd	1.49	(2.40)
3rd	2.15	(3.47)
4th	3.14	(5.05)
5th	4.23	(6.81)
6th	5.79	(9.32)
7th	8.89	(14.30)
8th	15.54	(25.00)
1st rev.	1.27	(2.04)
2nd rev.	2.49	(4.00)
3rd rev.	5.23	(8.41)
4th rev.	9.65	(15.53)

On request the type with maximum speed of 18.6 m.p.h. (30.045 Km.p.h.) is also available.



**SAME S.p.A.**  
 24047 Treviglio (Italy)  
 Tel. 2781  
 Telex: 32472 Sametrac



the lube-oil  
 of our choice

**LEO FOX & SON**  
 Area Agent:  
**SAME SALES & SERVICE**  
**MERRICKVILLE, ONTARIO**  
**PHONE (613) 269-3294**

Technical data are subject to change and are not binding.  
 Prop. SAME - mod. 123 - XII, 73 (377) - Edizioni APIS - Viale Majno, 26 - 20129 Milano (Italy)

