

# STIHL O41 AV



\$230-75

# STIHL 041 AV






Although the STIHL 041 AV is a lightweight saw it is extremely powerful. This, plus its modern design and balance makes it an ideal saw for pruning and for felling trees up to 40 cm (16") in diameter.

STIHL AV saws – and among them the 041 AV – incorporate the famous STIHL AV handle, which absorbs the vibrations of engine and chain, and lets you cut for hours with minimum of effort and fatigue, and without unnecessary physical discomfort to your hands, arms and back.


The large muffler of the STIHL 041 AV assures less noise in operation. The greater filtering surface of the air filter provides cleaner air and longer working time between changes.

All things considered: the STIHL 041 AV is a real pleasure to operate and with this saw, the average operator can actually work longer, with less effort and cut more wood.

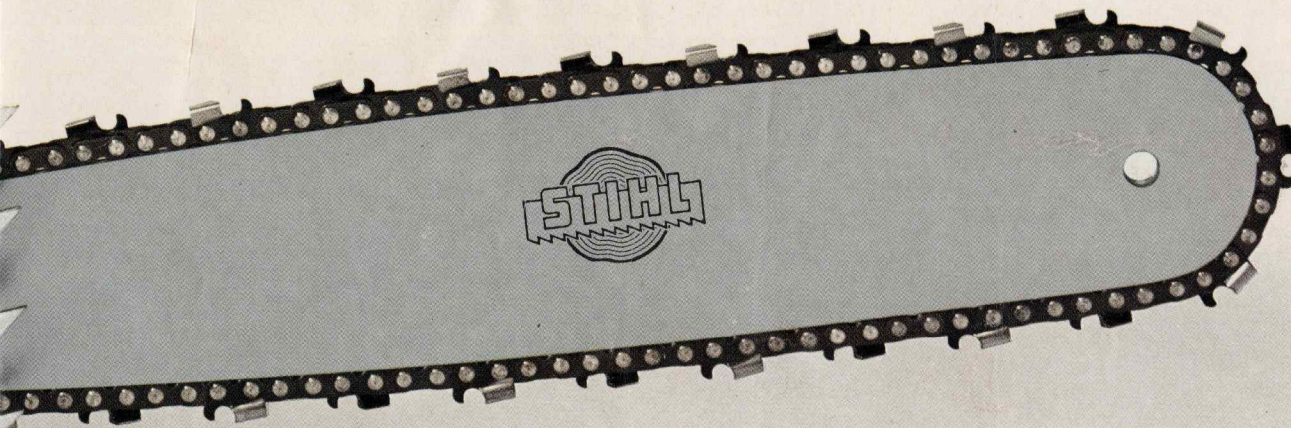

STIHL Motorsägen 705 Waiblingen

# STIHL 041 AV

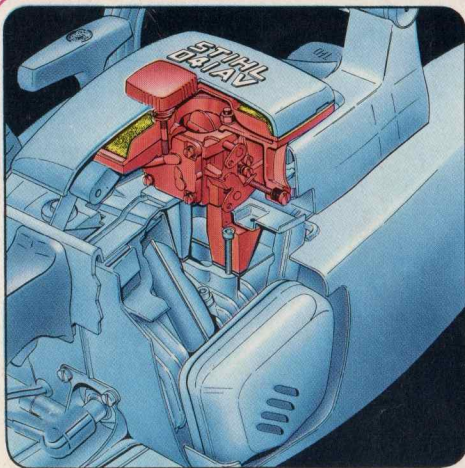

The carburetor receives its operating impulses directly from the crankcase and is completely protected from the heat of the engine. This makes for greater efficiency and reliability in operation.

## SPECIFICATIONS:

Air-cooled, single cylinder, two cycle gasoline engine

Piston displacement:  
61 cu. cm (3.72 cu. inches)

Tank capacity: 0.6 litre (1.1 pint)

Fuel consumption: 1.0 litre (1.8 pint) of gasoline oil mixture (25 : 1) per working hour


Weight: 7.1 kgs (15.6 lbs.) with 35 cm (14") bar & chain

Bar lengths: 35, 40, 50 and 63 cm (14", 16", 20" and 25.2")


Centrifugal clutch

Bosch fly-wheel magneto

Automatic chain lubrication with oil quantity control

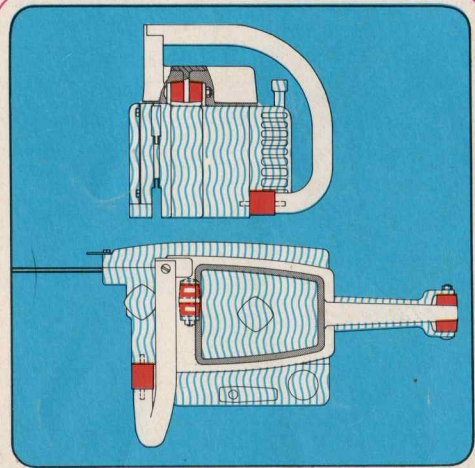

The patented STIHL AV feature consists of three strategically located vibration eliminating shock-absorbers, which almost completely absorb the vibration of the engine and chain.

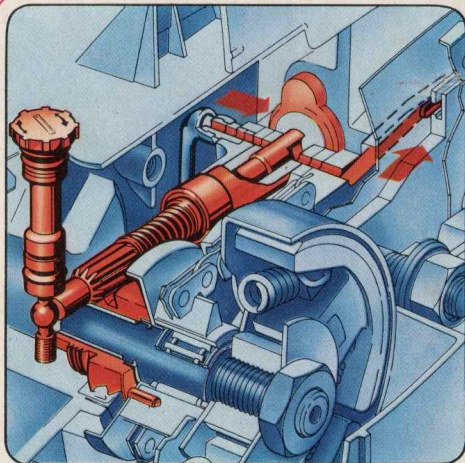

The STIHL 041 AV has an automatic chain lubrication system that automatically changes the oil supply with the cutting speed. The quantity of chain oil can also be adjusted to conform to the kind of timber that is to be cut.

